

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



# Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









# 14.2 Gbps Asynchronous4-Channel Signal Conditioner

Data Sheet HMC7545

#### **FEATURES**

Continuous time linear equalizer (CTLE) with up to 18 dB equalization

Loss of signal (LOS) detection with programmable threshold and hysteresis

**Driver performance** 

Programmable differential swing: 400 mV p-p differential to 900 mV p-p differential

Programmable driver output with up to 12 dB de-emphasis Automatic electrical idle and receiver detection Output polarity inversion and automatic output squelch Single supply (2.5 V or 3.3 V)

Low power operation: 80 mW per channel Per lane power-down options

Flexible configuration interface: pin strap, 2-wire interface, or EEPROM

#### **APPLICATIONS**

QSFP+ direct attach active copper modules
10 Gb, 40 Gb Ethernet and OTN line cards
10 Gb, 40 Gb backplane drivers
8 Gb, 16 Gb Fibre Channel and InfiniBand® EDR line cards
and backplane drivers

8 Gb, 10 Gb, 16 Gb active optical modules 8 Gb, 10 Gb, 16 Gb active copper cable assemblies 1.5 Gb, 3 Gb, 6 Gb, 12 Gb SAS/SATA PCIe 1.x, 2.0, 3.0

Broadband and automatic test and measurement

#### **GENERAL DESCRIPTION**

The HMC7545 is a unidirectional, quad-channel, protocol and data rate agnostic, asynchronous signal conditioner, designed for short and intermediate range optical modules, line cards, and backplane applications operating at up to 14.2 Gbps.

Each channel provides programmable input equalization, LOS and receiver detection, automatic output squelch, programmable output swing and output de-emphasis.

All high speed differential inputs and outputs of the HMC7545 are current mode logic (CML), terminated on-chip with 50  $\Omega$  to the positive supply, and can be dc-coupled or ac-coupled.

The device uses a single supply, 2.5 V or 3.5 V, and its typical power dissipation is less than 80 mW per channel.

The HMC7545 is packaged in a 36-lead, 4 mm  $\times$  7 mm LFCSP package and operates from  $-40^{\circ}$ C to  $+85^{\circ}$ C.

#### **FUNCTIONAL BLOCK DIAGRAM**

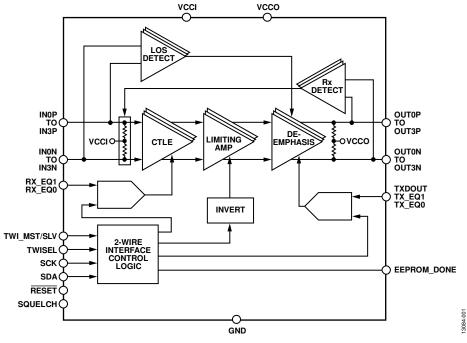


Figure 1.

For more information about the HMC7545, contact Analog Devices, Inc., at RFMG-HSL@analog.com.

# **HMC7545\* PRODUCT PAGE QUICK LINKS**

Last Content Update: 02/23/2017

# COMPARABLE PARTS 🖵

View a parametric search of comparable parts.

### **EVALUATION KITS**

• HMC7545 Evaluation Board

#### DESIGN RESOURCES 🖳

- · HMC7545 Material Declaration
- · PCN-PDN Information
- · Quality And Reliability
- · Symbols and Footprints

## **DISCUSSIONS**

View all HMC7545 EngineerZone Discussions.

## SAMPLE AND BUY 🖳

Visit the product page to see pricing options.

#### TECHNICAL SUPPORT 🖳

Submit a technical question or find your regional support number.

## DOCUMENT FEEDBACK 🖳

Submit feedback for this data sheet.

This page is dynamically generated by Analog Devices, Inc., and inserted into this data sheet. A dynamic change to the content on this page will not trigger a change to either the revision number or the content of the product data sheet. This dynamic page may be frequently modified.

HMC7545 Data Sheet

# **NOTES**

