

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









date 04/03/2017

page 1 of 3

MODEL: HSS-B20-0508H-01 | DESCRIPTION: HEAT SINK

FEATURES

- TO-220 package
- round hole for component attachment
- solder pins for secure PCB mounting
- black anodized finish





thermal resistance¹ power dissipation¹ @ 1 W, 400 LFM @ 75°C ∆T, @ 75°C ∆T, @ 1 W, @ 1 W, 200 LFM nat conv nat conv nat conv (°C/W) (°C/W) (°C/W) (°C/W) (W) 12.99 7.40 HSS-B20-0508H-01 10.14 3.51 3.10


Note: 1. See performance curves for full thermal resistance details.

PERFORMANCE CURVES

	Heatsink Temperature Rise Above Ambient ($\Delta T = Ths - Ta$) (°C)			
Power (W)	Natural Conv.	200 LFM	400 LFM	
0	0	0	0	
1	12.99	3.51	3.10	
2	24.98	7.29	5.90	
3	35.01	11.39	8.91	
4	44.78	15.00	11.93	
5	54.16	18.87	14.84	
6	63.78	22.93	17.86	
7	72.49	26.77	20.92	
8	79.12	30.54	24.03	
9	85.23	34.46	26.83	
10	92.25	38.38	29.87	
The Wheet are the transfer of the control of the				

Ths: "hot spot" temperature measured on the heatsink


Ta: ambient temperature

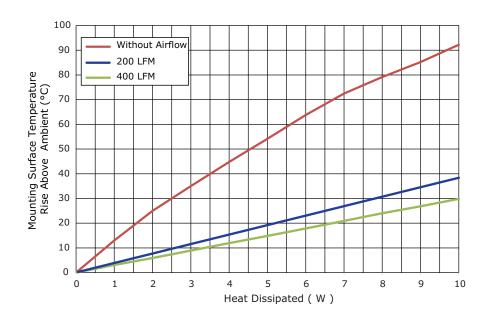



MECHANICAL DRAWING

units: mm tolerance: ±0.5 mm

MATERIAL	AL1100
FINISH	black anodized
THICKNESS	1.2 mm
PIN MATERIAL	brass
PIN PLATING	tin
WEIGHT	7.8 g



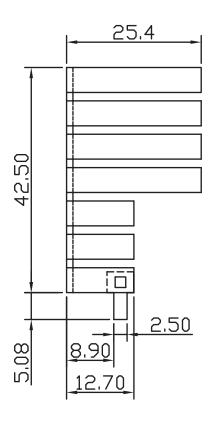

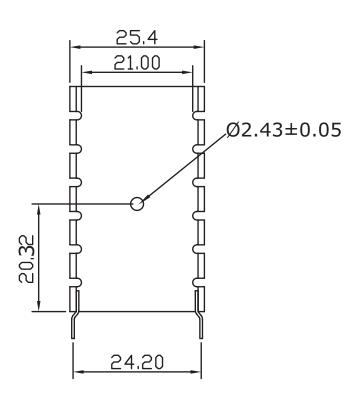

REVISION HISTORY

rev.	description	date
1.0	initial release	04/03/2017

The revision history provided is for informational purposes only and is believed to be accurate.



Headquarters 20050 SW 112th Ave. Tualatin, OR 97062 800.275.4899

Fax 503.612.2383 cui.com techsupport@cui.com

CUI offers a one (1) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.