



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





# Specialty Terminals

HT-72F-187-20, HT-72F-250-32  
Female Disconnect, High Temperature,  
Non-Insulated, Butted Seam

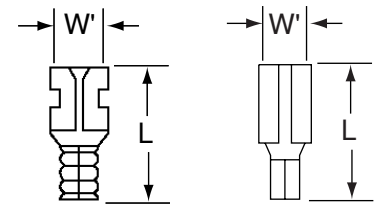

HT-72F-187-20

HT-72F-250-32

## Data Sheet

Product Number	Wire Range (AWG)	Width (W') x Thickness	Mates with Male Tab L	Barrel Length	Barrel I.D.
HT-72F-187-20	16-14	0.187 x 0.020	0.58	0.25	0.085
HT-72F-250-32	16-14	0.250 x 0.032	0.64	0.23	0.095

### Specifications

Wire Size:	See Table Above
Barrel Seam:	Butted
Maximum Operating Temp:	900°F (482°C)
Maximum Current:	Same as Wire
Terminal Material:	Steel
Plating:	Nickel

### Installation Information


#### **WARNING**

Turn power off before installing or removing terminal. All electrical work should be done according to appropriate electrical codes.

For use on stranded copper wire only.

Strip away the end 3/8 inch of wire insulation.

Make the crimp in the proper station of a recommended 3M crimp tool: TH-440, TH-450 (scissor style) or TR-490 (ratchet style) hand tools.



Barrel Crimp (Electrical)

## Engineering Specification

Crimp-Type Female Disconnect Terminals shall, electrically and mechanically, connect permanently to the prestripped end of a stranded copper wire, and have a tongue portion with fingers which grip a Male Disconnect in a separable, reusable manner, forming a Quick Connect Wiring Termination.

The non-insulated high temperature 0.250" female quick-slide shall be nickel-plated 0.019" thick steel, with a tongue for gripping a 0.25" wide x 0.030" or 0.032" male tab, and a 0.23" long butted seam barrel, sized for a specified (AWG) wire range (16-14).

The non-insulated high temperature 0.187" female quick-slide shall be nickel-plated 0.016" thick steel, with a tongue for gripping a 0.187" wide x .020" male tab, and a 0.25" long butted seam barrel, sized for a specified (AWG) wire range (16-14).

3M is a trademark of 3M

### IMPORTANT NOTICE

Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use.

**Warranty; Limited Remedy; Limited Liability.** This product will be free from defects in material and manufacture as of the date of purchase. **3M MAKES NO OTHER WARRANTIES INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.** If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. **Except where prohibited by law, 3M will not be liable for any loss or damage arising from this 3M product, whether direct, indirect, special, incidental or consequential regardless of the legal theory asserted.**



### Electrical Products Division

6801 River Place Blvd.  
Austin, TX 78726-9000  
<http://www.3M.com/elpd>

Litho in USA.  
© 3M 2002 78-8126-5541-9-A