



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



HTC


PCB Fuse accessories for 5 mm fuses



PCB Fuse Blocks


HTC-15M

- 250 V, 6.3 A, 1.6 W
- Tin plated brass terminals
- cURus: Guide IZLT2 & IZLT8, File # 14853
- Cover available:
 - HTC-150M (Transparent)
 - HTC-140M (Beige/Natural)

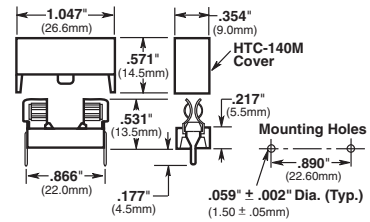

HTC-60M



- 250 V, 6.3 A, 1.6 W
- Tin plated bronze terminals

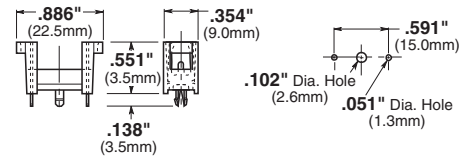

PCB Fuse Clips


HTC-200M

- Tin plated bronze
- Tape and fan fold packed

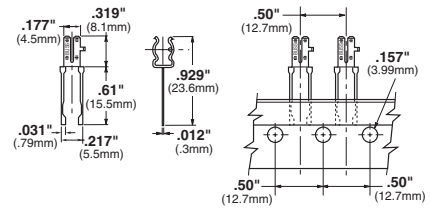

HTC-210M

- Tin plated brass

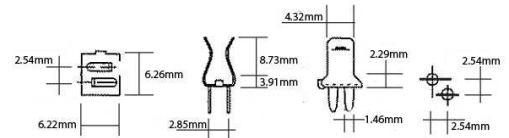



PCB Fuse Holders

HTC-45M

- 250 V, 10 A, 2.5 W
- Bayonet cap/carrier
- Operating temperature range: -30 °C to + 85 °C
- cURus: Guide IZLT2 & IZLT8 File # 14853

HTC-50M

- 250 V, 10 A, 2.5 W
- Bayonet cap/carrier
- Operating temperature range: -30 °C to + 85 °C
- cURus: Guide IZLT2 & IZLT8 File # 14853

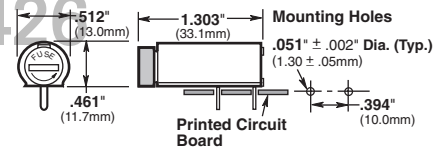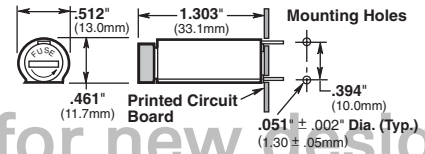

Not recommended for new designs.
Recommended replacement is
H15 data sheet # 4426

Common HTC specifications

- Solerability: In accordance with IEC 68-2-20
- Molded materials: UL94 V-0 (HTC-15M UL94 V-1)

Packaging Codes

Packaging code prefix	Description
Blank	10 pieces packed into a carton (Not available on HTC-210M)
BK-	100 pieces packed into a cardboard shelf package
BK1-	1000 pieces packed into a poly bag
AP-	1000 pieces per box in Ammo pack (HTC-200M only)

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin.

Eaton
Electronics Division
 1000 Eaton Boulevard
 Cleveland, OH 44122
 United States
www.eaton.com/electronics

© 2017 Eaton
 All Rights Reserved
 Printed in USA
 Publication No. 2110 BU-MC17076
 December 2017

Eaton is a registered trademark.

All other trademarks are property of their respective owners.