



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



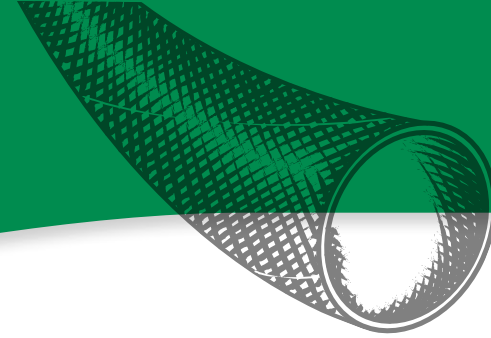

- Meets UL 2024
- VW-1, FAR 25 Approved
- Expands Up To 150%
- Resists Gasoline And Engine Chemicals
- Cut And Abrasion Resistant
- Easy To Install

Put-Ups

Nominal Size	Part #	Expansion Range		Bulk Spool	Shop Spool	Available Colors	Lbs/100'
		Min	Max				
1/8"	HTN0.13	3/32"	1/4"	1,000'	225'	2	0.25
1/4"	HTN0.25	1/8"	7/16"	1,000'	200'	2	0.38
3/8"	HTN0.38	3/16"	5/8"	500'	125'	2	0.86
1/2"	HTN0.50	1/4"	3/4"	500'	100'	2	1.10
3/4"	HTN0.75	1/2"	1 1/4"	250'	75'	2	1.70
1"	HTN1.00	5/8"	1 5/8"	250'	65'	2	2.20
1 1/4"	HTN1.25	3/4"	1 3/4"	250'	50'	2	2.60
1 3/4"	HTN1.75	1 1/4"	2 3/4"	200'	30'	2	4.40
2"	HTN2.00	1 1/2"	3 1/2"	200'	50'	2	4.60



**Cut Cleanly
Hot Knife**

**Very Low Outgassing, Self-Extinguishing
UL-2024 Plenum Rated Sleeving**


Colors Available:
TW & TB

HALAR® (HT) self-extinguishing sleeving is used where flammability, high temperature endurance and low outgassing are primary concerns. HT is braided from 11 mil ethylene chlorotrifluoroethylene (ECTFE) copolymer monofilament.

Because of its low flame spread and smoke generation properties, HT has received UL 2024 and NFPA 262 plenum listings, UL flame resistance rating of VW-1 and exceeds automotive industry requirements of FMVSS 302, as well as aviation industry requirements of FAR 25.

HT resists a wide range of corrosive chemicals and organic solvents, including strong acids, chlorine and aqueous caustics. HALAR® ECTFE also maintains useful properties on exposure to Cobalt 60 radiation at doses up to 200 megarads.

Halar's low outgassing, as well as its heat, chemical and radiation properties, make it ideal for use as a component in technologically advanced applications.

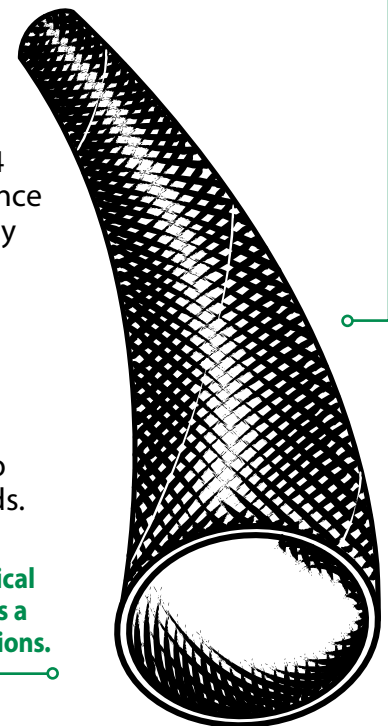

Material HT
Ethylene-chlorotrifluoroethylene

Grade
HTN

Monofilament Diameter
.011"

Drawing Number
TF001HT-WD



Colors Available:

White with Black Tracer (TW),
Black with White Tracer (TB).

TECHFLEX
Braided Sleeving Products
www.techflex.com
800.323.5140 • 973.300.9242 • fax: 973.300.9409
104 Demarest Road • Sparta, NJ 07871

Halar® is a registered trademark of the Solvay Solexis Corporation.




VW-1

Plenum

FAR-25



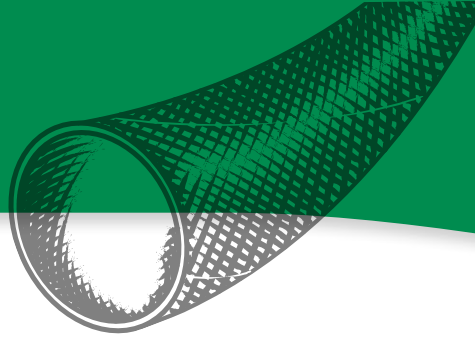

ABRASION FLAMMABILITY

Abrasion Resistance
Medium

Rating _____ FAR 25, VW-1

Abrasion Test Machine
Taber 5150

Abrasion Test Wheel
Calibrase H-18

Abrasion Test Load
500g

Room Temperature
71°F

Humidity
58%

Material Destroyed
600 Test Cycles

Pre-Test Weight
6,354.9 mg

Post-Test Weight
5,922.8 mg

Test End Loss Of Mass
Point Of Destruction
432.1 mg

CHEMICAL RESISTANCE


1=No Effect 4=More Affected
2=Little Effect 5=Severely Affected
3=Affected

Aromatic Solvents _____	1
Aliphatic Solvents _____	1
Chlorinated Solvents _____	1
Weak Bases _____	1
Salts _____	1
Strong Bases _____	1
Salt Water 0-S-1926 _____	1
Hydraulic Fluid MIL-H-5606 _____	1
Lube Oil MIL-L-7808 _____	1
De-Icing Fluid MIL-A-8243 _____	1
Strong Acids _____	1
Strong Oxidants _____	1
Esters/Ketones _____	2
UV Light _____	1
Petroleum _____	1
Fungus ASTM G-21 _____	1
Halogen Free _____	Yes
RoHS _____	Yes
SVHC _____	

Melt Point
ASTM D-2117
482°F (250°C)

Maximum Continuous
Mil-I-23053
302°F (150°C)

Minimum Continuous
-103°F (-75°C)

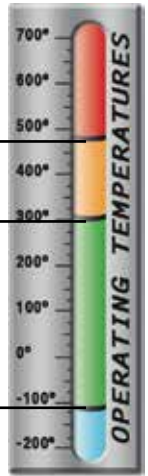

PHYSICAL PROPERTIES

Monofilament Diameter _____	.011
ASTM D-204	
Flammability Rating _____ FAR 25, VW-1	
FMVSS-302 Approved	
Recommended Cutting _____	Hot Knife
Colors _____	2
Wall Thickness _____	.028
Tensile Strength (Yarn) _____	4.3
ASTM D-2256 Lbs	
Specific Gravity ASTM D-792 _____	1.68
Moisture Absorption _____	.02
% ASTM D-570	
Hard Vacuum Data _____	
ASTM E-595 at 10-5 torr	
TML _____	.18
CVCM _____	.02
WVR _____	0
Smoke D-Max _____	94
ASTM E-662	
Outgassing _____	Low
Oxygen Index _____	64
ASTM D-2863	

www.techflex.com