



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




SERIES

**HTPT66R
HTPT66**



High Temperature Power Toroids

DASH NUMBER*
INDUCTANCE (μH)
±10% @ 1 KHZ
DC RESISTANCE
MAXIMUM (OHMS)
CURRENT RATING
MAXIMUM (A DC)
INCREMENTAL
CURRENT (A DC)
NOMINAL (Inches)
DIMENSION E

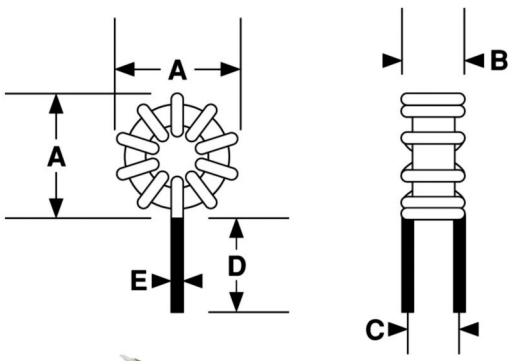

SERIES HTPT66 IRON CORE					
-391K	0.390	0.0020	18.3	26.6	0.053
-122K	1.20	0.0029	15.3	14.8	0.053
-152K	1.50	0.0036	13.7	13.3	0.053
-472K	4.70	0.0086	8.8	7.4	0.042
-103K	10.0	0.019	5.9	5.1	0.034
-153K	15.0	0.030	4.6	4.3	0.031
-223K	22.0	0.036	4.0	4.0	0.031
-393K	39.0	0.073	2.8	3.0	0.025
-683K	68.0	0.122	2.1	2.3	0.022
-104K	100	0.145	1.9	1.8	0.022

*Complete part # must include series # PLUS the dash #
For surface finish information, refer to www.delevanfinishes.com



Actual Size (Max.)

Physical Parameters

	Inches	Millimeters
A	0.660 Max.	16.76 Max.
B	0.360 Max.	9.14 Max.
C	0.280 (Ref. only)	7.11 (Ref. only)
D	1.00 Min.	25.4 Min.
E	See Characteristics Table	

Operating Temperature Range

-55°C to +200°C
-55°C to +160°C @ full rated current. All Materials are rated to +200°C.



Current Rating at 160°C Ambient 40°C Rise

Inductance Measured @ 1 V, 100mA AC with no DC current. Inductance at +200°C is typically 5.5% lower than inductance measured at +25°C.

Incremental Current The current at which the inductance will be decreased by a maximum of 10% from its initial 0 DC value. At elevated temperatures incremental current is unaffected.

Packaging Bulk only

Contact the Factory for additional sizes, mounting, and electrical configurations.

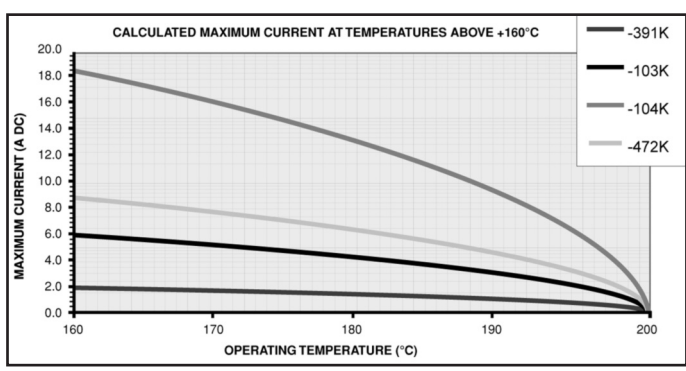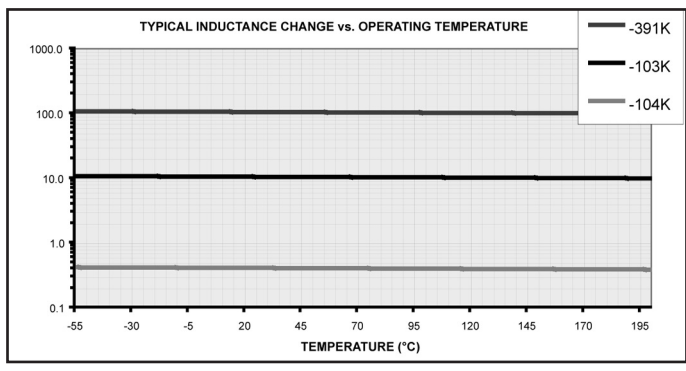

Charts are for reference only. Operation should be verified under actual operating conditions to avoid component operation above +200°C.