



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



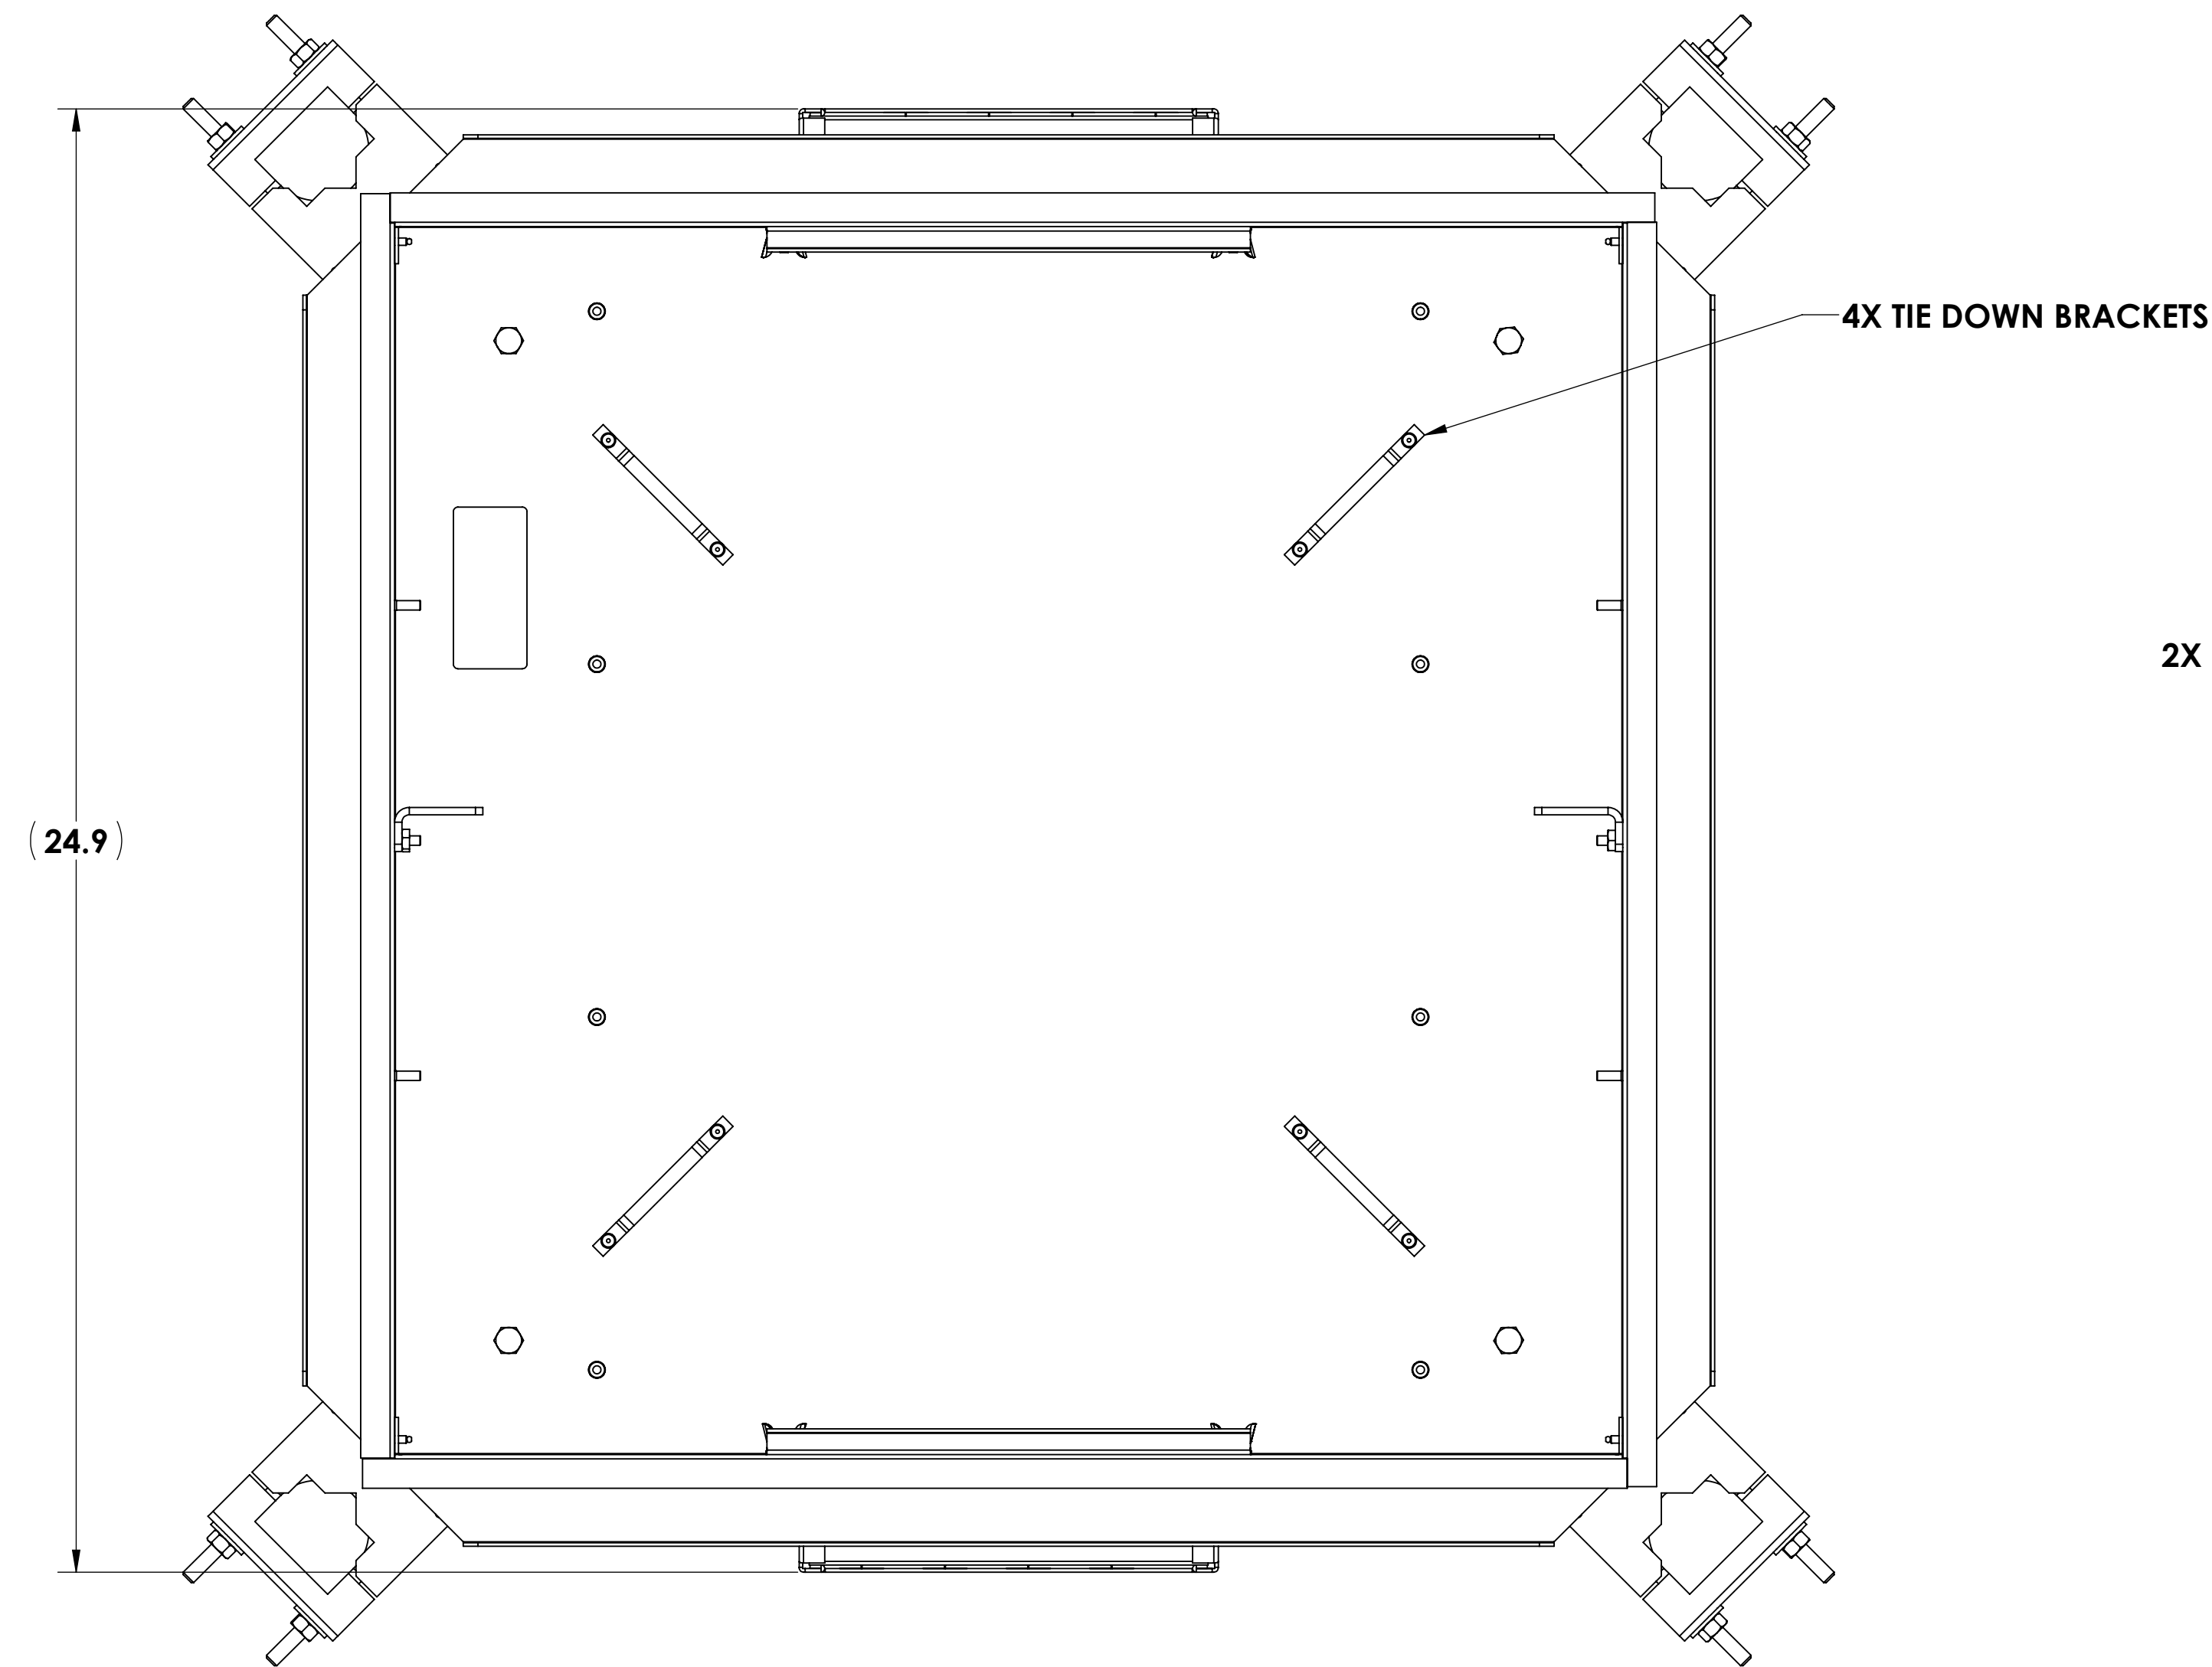



2X PANEL MOUNTING BRACKETS
3 POSITIONS

2X FIRESTOP FOAM COVERS

8X FIRESTOP FOAM BLOCKS

4X SUPPORT BRACKETS

4X CABLE TIES FOR
CABLE SECUREMENT
INSIDE THE BOX

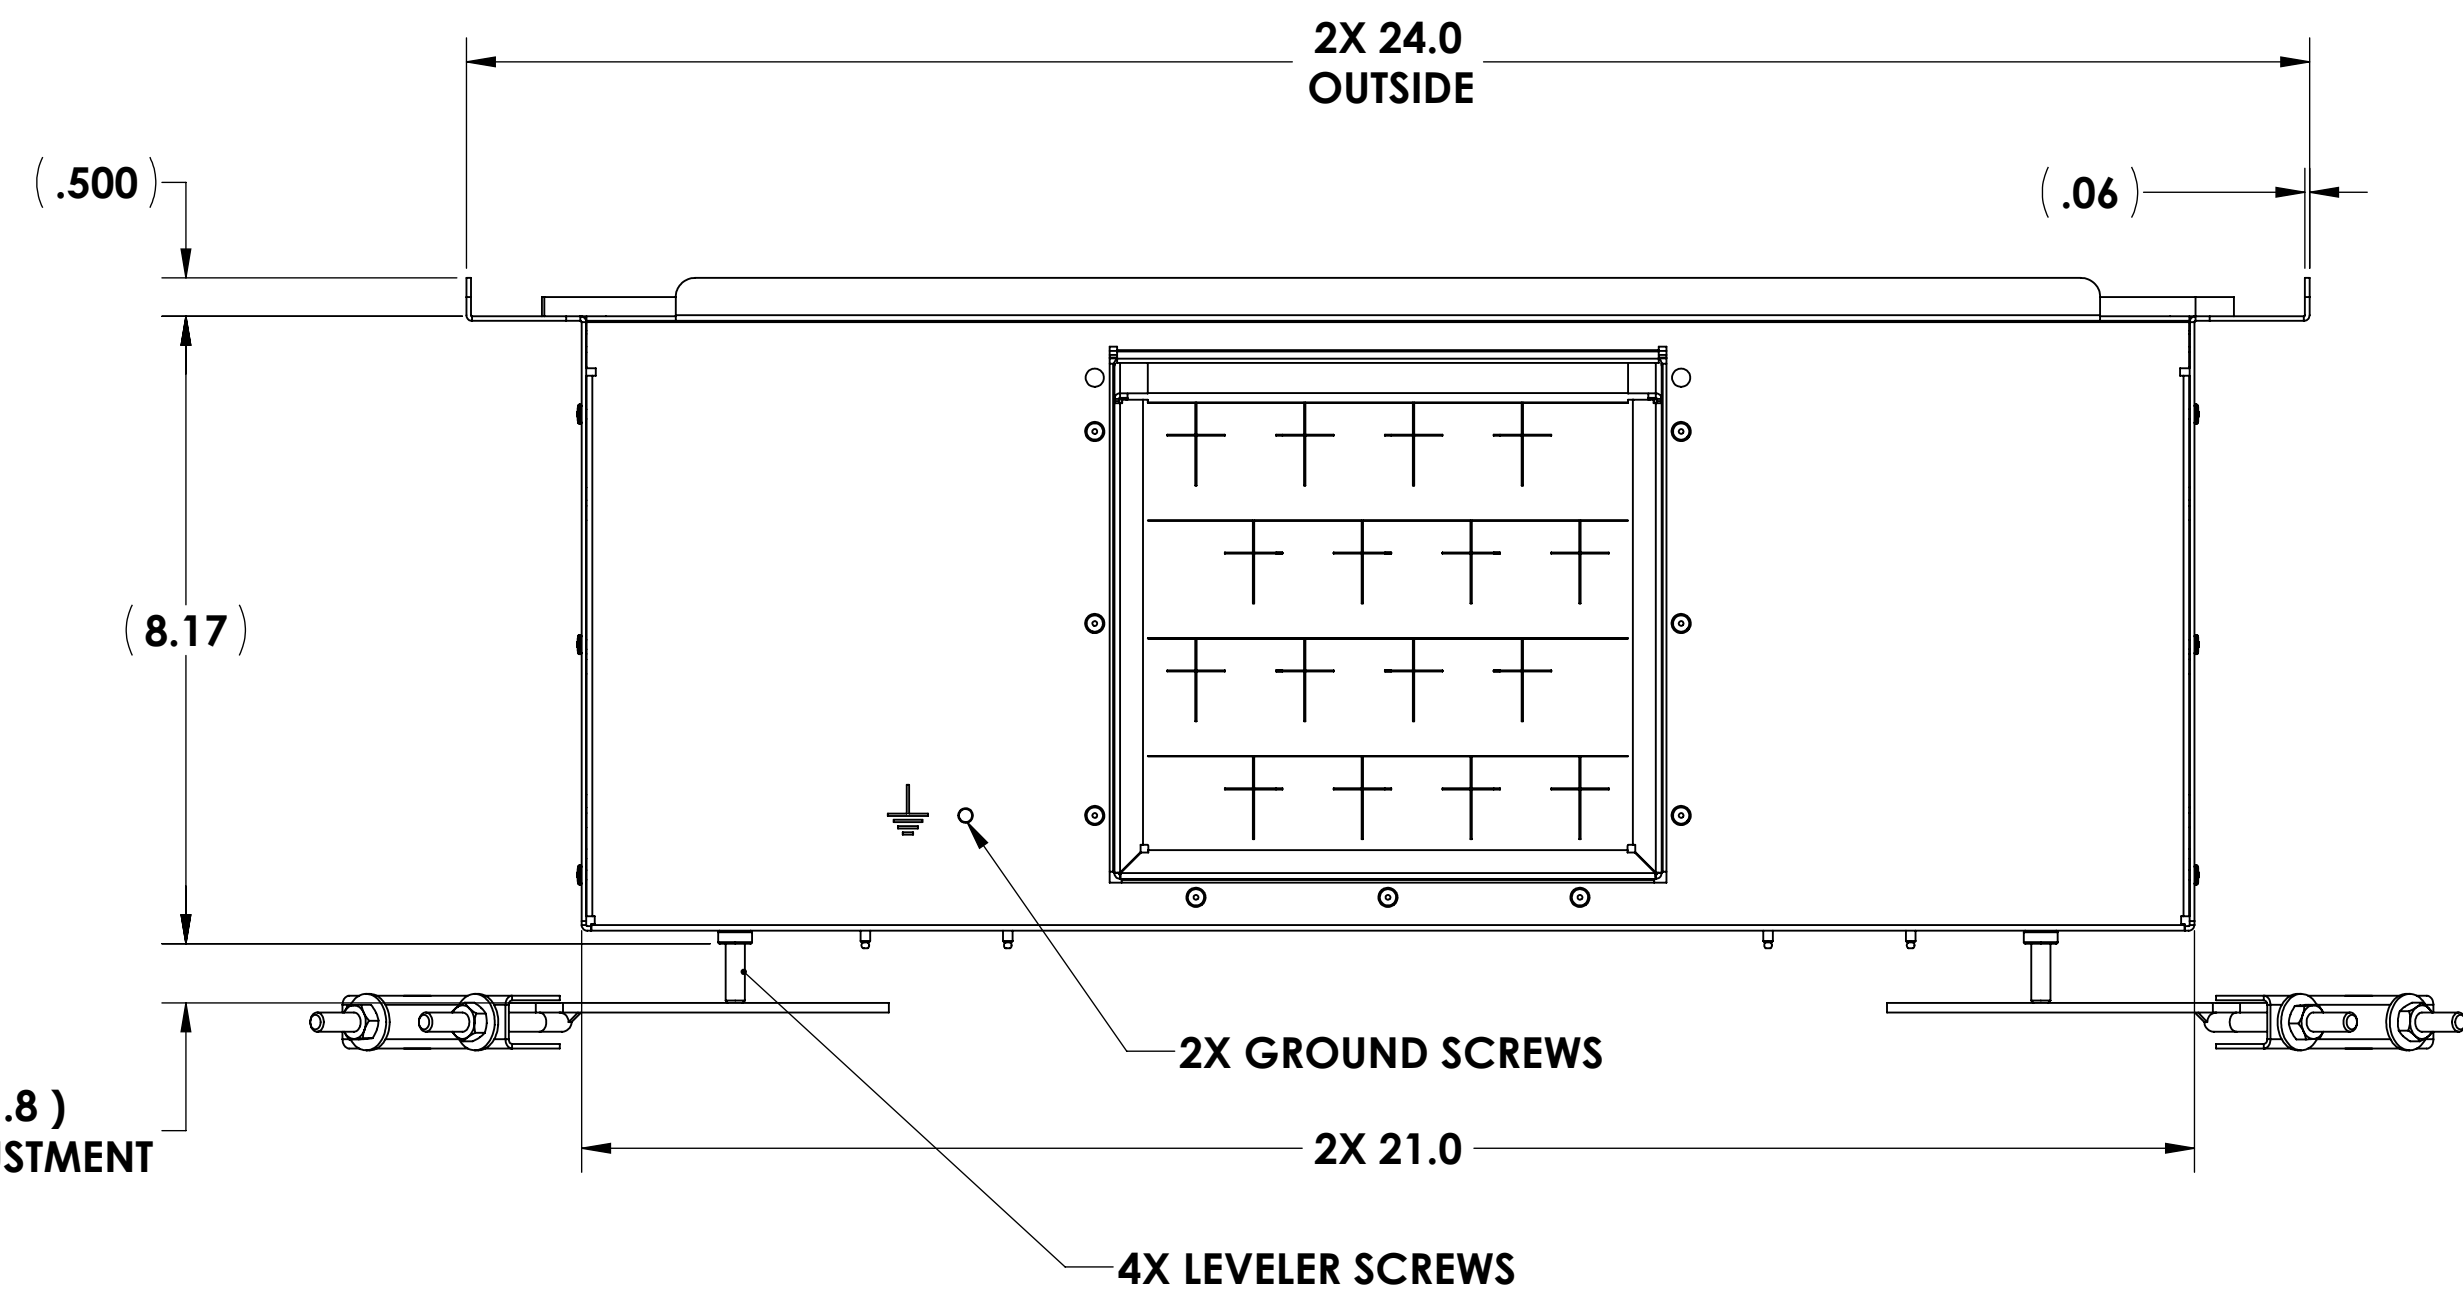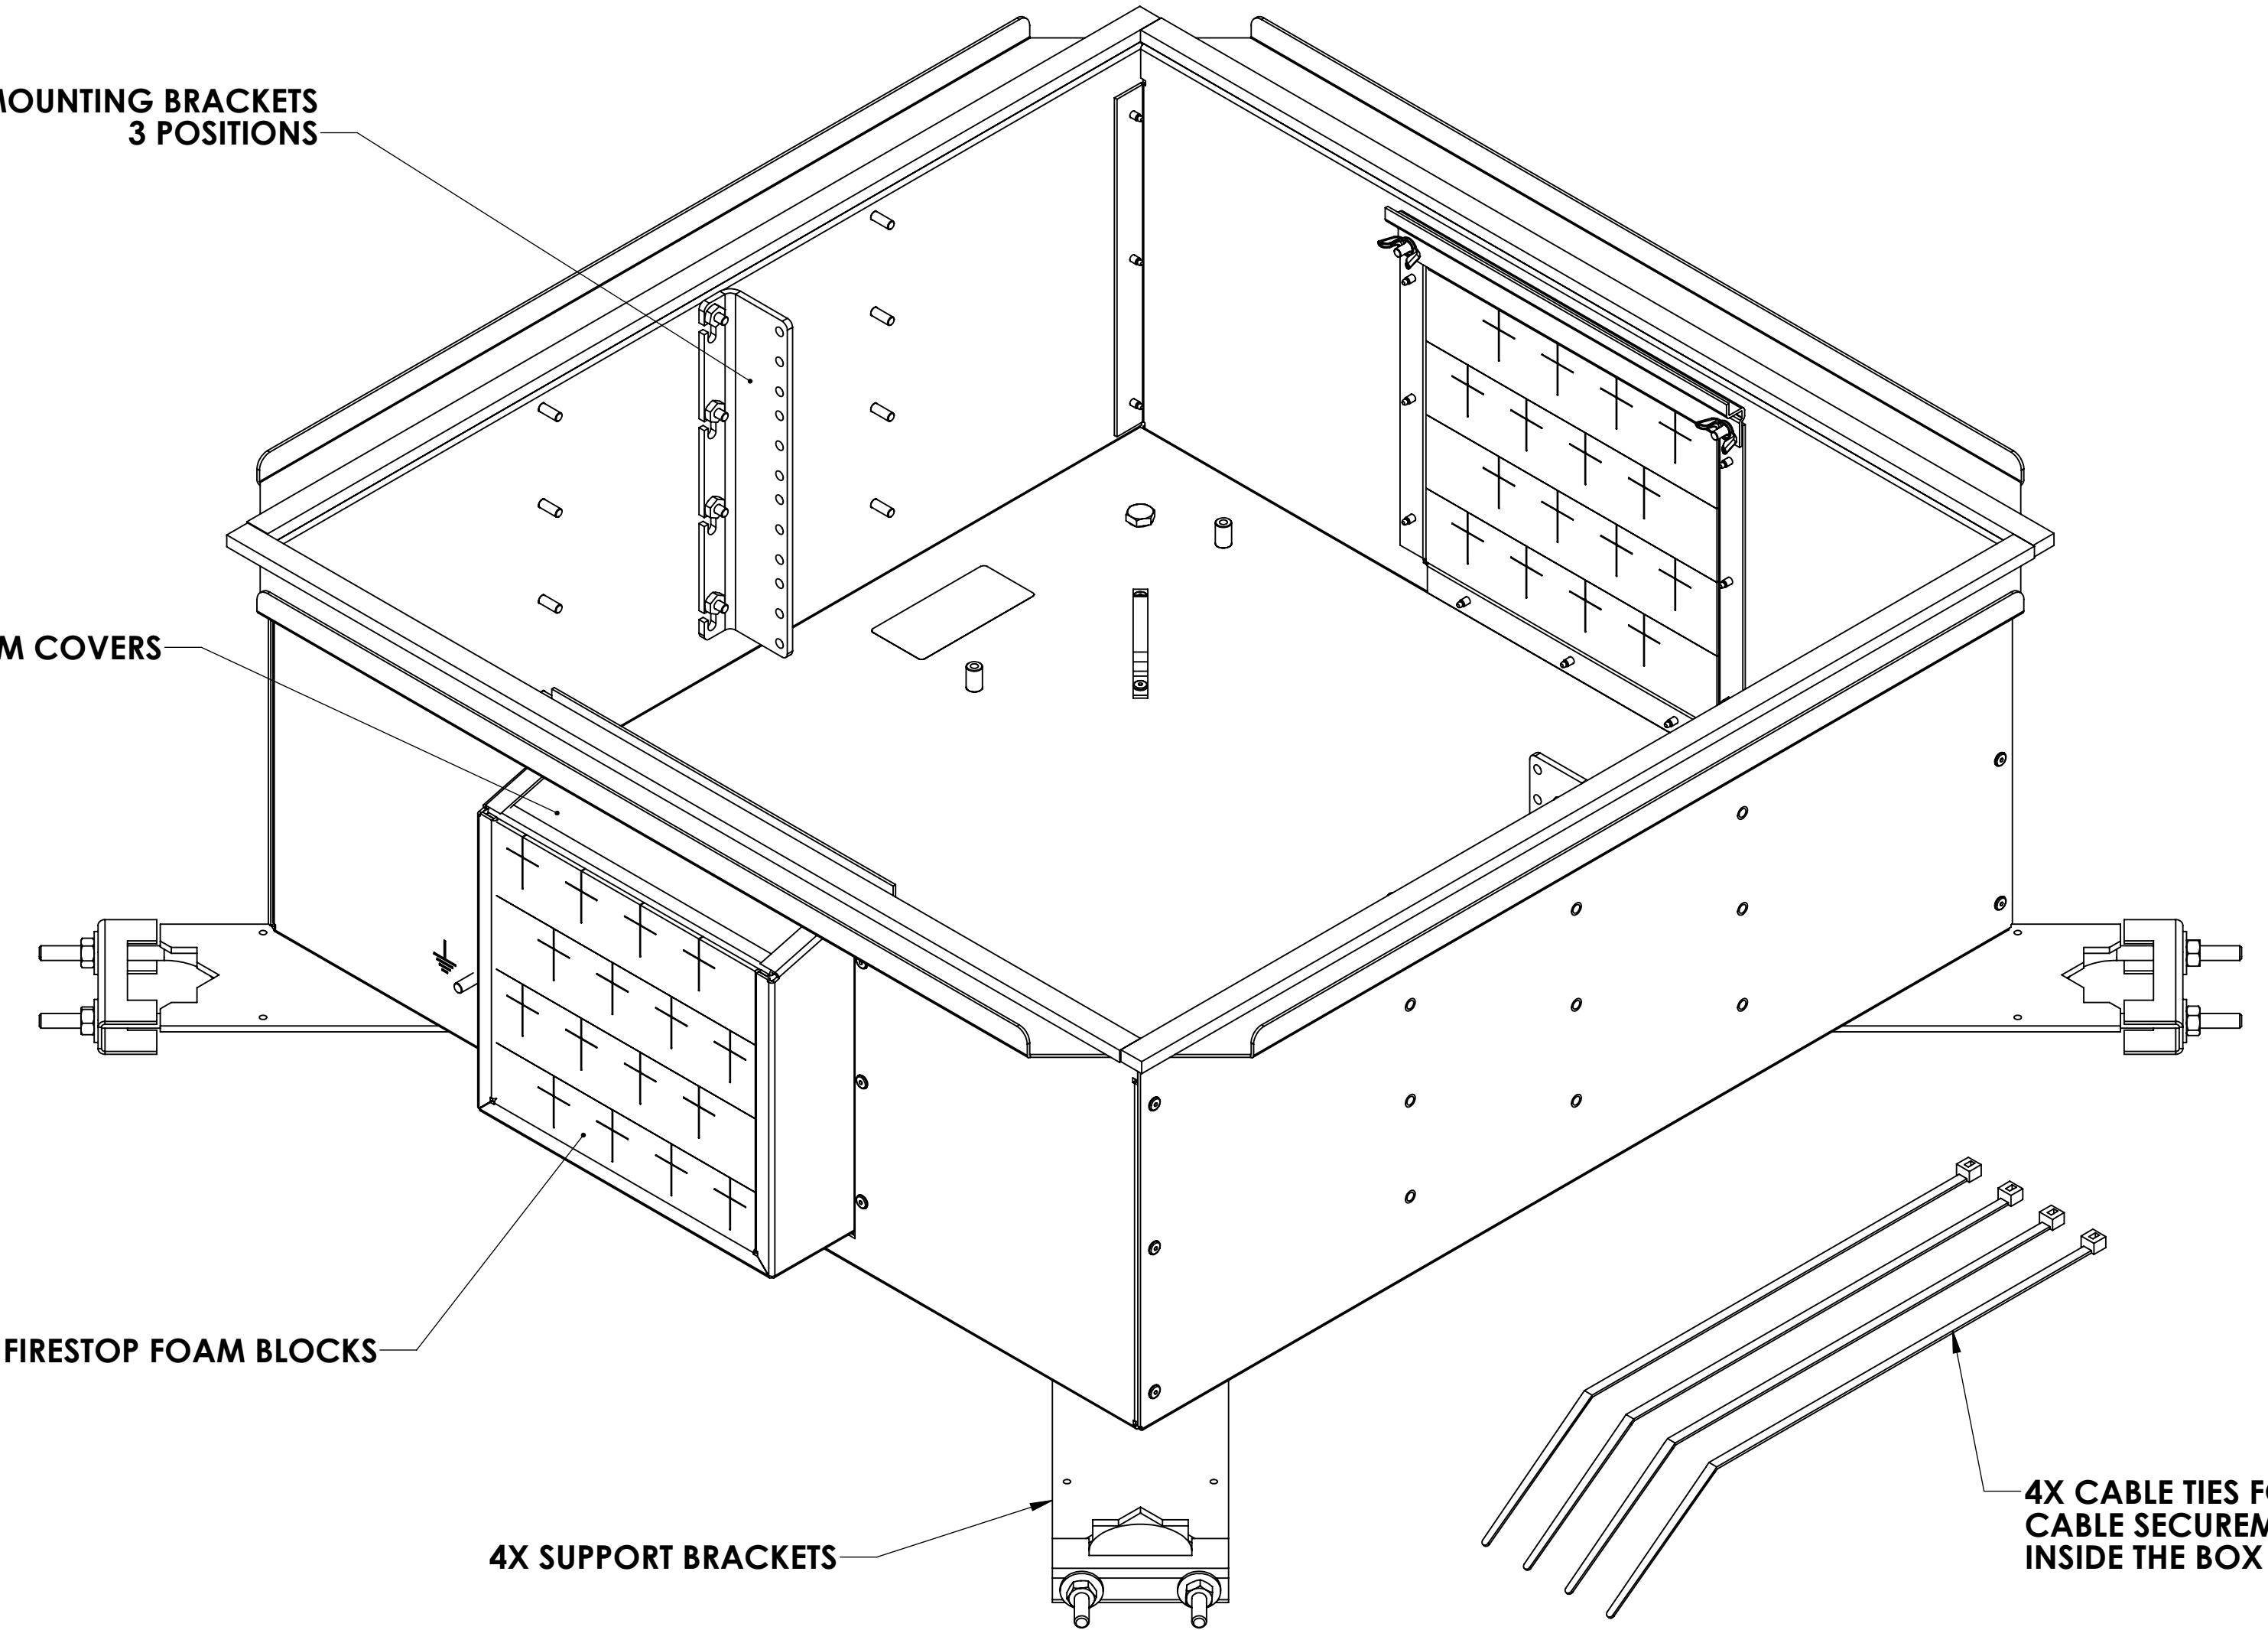

Features :

- For indoor use only, environmentally controlled areas. The enclosure can be used in air-handling spaces.
- cUL Listed to UL1863, also meets requirements of UL2043
- Fits into a 24"W x 24"L x 12"D raised floor opening. Suitable for a 2'x2' floor tile with U-shaped stringers.
- Box interior space = 20.9"Wx20.9"Lx7.9"D
- 2 openings sized to accept 16 RapidNet cassettes each. (1.20" max diameter cable per cassette)
- Firestop foam sealing kit to seal the 2 openings.
- 2 Firestop foam covers provided, accessible from inside of box.
- Inside mounting brackets for 19" EIA rack mounting. Universal vertical bracket hole spacing of 5/8"-5/8"-1/2" Threaded for #12-24 mounting screws.
- #12-24 panel mounting screws sold separately.
- Capable of 4RMU, vertical, fixed at center or 4" offset from Center.
- Provision for 4 cable tie brackets for securing routed wire cables.
- Provided with 4 T50L plenum rated cable ties for use with the cable tie brackets.
- Load capacity = 85 pounds of equipment total.
- Provided with 4 raised floor Support brackets.
- Provided with 4 1/4"-20 hex head box leveling screws.
- Provided with 2 grounding screws to outside of box.
- No cover provided, standard 2'x2' floor tile to cover top.
- Floor tile seal provided on top flange of box.
- RoHS compliant.

HellermannTyton.
ALL PROPRIETARY RIGHTS IN THE SUBJECT MATTER SHOWN ON THIS DRAWING ARE EXCLUSIVE PROPERTY OF HELLERMANNITYTON

name	date	city	state

NOTES

REVISION	level	06
	by	KAC
	date	01/13/2009
	ECN #	011211
	part level	-

DIMENSIONS	.XXXX = ±.0005
	.XXX = ±.005
	.XX = ±.01
	.X = ±.03
	∠ = ±0.5°
unless otherwise specified	
units	inches

PART	number	HTZB2X2	phase	Production
	name	2'X2' ZONE BOX ASSEMBLY		
	material	ALUMINUM .06 THK		

DRAWING	format	D	SW 2007	scale	1:2.5
	version	N	CAD		
	computer file number	M107-012-001CST_06	previous number		
	drawn	KAC	KAC		
	date	06/06/2008	checked	01/13/2009	approved
type	Customer			sheet 1 of 1	
number	M107-012-001CST				