



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



HOOK-UP WIRE


HOOK-UP WIRE KITS

UL 1007/ 1569
 CSA TR-64
 MIL-W-76B, TYPE MW

HOOK-UP WIRE KITS

Alpha's Hook-Up Wire Kits contain an assortment of 100 ft (30,5m) spools of hook-up wire suitable for military or UL/ CSA applications. These kits have been designed for use by technicians, engineers and designers in the R & D lab or maintenance shop.

Each kit contains five spools of hook-up wire in a unique, rack-mounted, transparent dispensing tube. The tube and rack system keeps hook-up wire neat, clean and conveniently at hand.

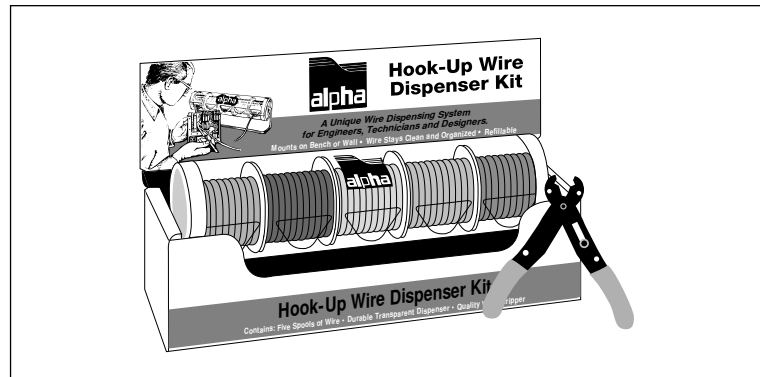

CHOOSE HOOK-UP WIRE KITS FOR:

- Convenient, Wire Dispensing System
- Five Assorted Hook-Up Wire Colors
- Includes Cut and Strip Tool
- Uses Standard Alpha Hook-Up Wire Spools When Refills Are Required

CHARACTERISTICS

OPERATING TEMPERATURE:

- - 40° C to 80° C (HU-KIT-10, 30)
- - 40° C to 105° C (HU-KIT-20, 40)

VOLTAGE RATING:

- 1000 Volt (HU-KIT-10, 30)
- 300 Volt (HU-KIT-20, 40)

PRODUCT DESCRIPTION:

- Conductor: Stranded Tinned Copper
- Insulation: Color-Coded PVC
- AWG Size: 22 AWG (HU-KIT-10, 20) 24 AWG (HU-KIT-30, 40)

SPECIFICATIONS

- UL AWM Styles 1007 and 1569
- CSA TR-64
- MIL-W-76B, Type MW

| Alpha Part No. | Contents | Quantity | | Reorder No. |
|-----------------------|---------------------------|----------|------|-------------|
| | | Ft. | m | |
| HU-KIT-10 (22 AWG) | MIL-W-76B Type MW / White | 100 | 30,5 | 1551 |
| | MIL-W-76B Type MW / Black | 100 | 30,5 | 1551 |
| | MIL-W-76B Type MW / Red | 100 | 30,5 | 1551 |
| | MIL-W-76B Type MW / Green | 100 | 30,5 | 1551 |
| | MIL-W-76B Type MW / Blue | 100 | 30,5 | 1551 |
| | Cut and Strip Tool | | | |

| Alpha Part No. | Contents | Quantity | | Reorder No. |
|-----------------------|---------------------------------|----------|------|-------------|
| | | Ft. | m | |
| HU-KIT-20 (22 AWG) | UL 1007/1569, CSA TR-64 / White | 100 | 30,5 | 3051 |
| | UL 1007/1569, CSA TR-64 / Black | 100 | 30,5 | 3051 |
| | UL 1007/1569, CSA TR-64 / Red | 100 | 30,5 | 3051 |
| | UL 1007/1569, CSA TR-64 / Green | 100 | 30,5 | 3051 |
| | UL 1007/1569, CSA TR-64 / Blue | 100 | 30,5 | 3051 |
| | Cut and Strip Tool | | | |

| Alpha Part No. | Contents | Quantity | | Reorder No. |
|-----------------------|---------------------------|----------|------|-------------|
| | | Ft. | m | |
| HU-KIT-30 (24 AWG) | MIL-W-76B Type MW / White | 100 | 30,5 | 1550 |
| | MIL-W-76B Type MW / Black | 100 | 30,5 | 1550 |
| | MIL-W-76B Type MW / Red | 100 | 30,5 | 1550 |
| | MIL-W-76B Type MW / Green | 100 | 30,5 | 1550 |
| | MIL-W-76B Type MW / Blue | 100 | 30,5 | 1550 |
| | Cut and Strip Tool | | | |

| Alpha Part No. | Contents | Quantity | | Reorder No. |
|-----------------------|---------------------------------|----------|------|-------------|
| | | Ft. | m | |
| HU-KIT-40 (24 AWG) | UL 1007/1569, CSA TR-64 / White | 100 | 30,5 | 3050 |
| | UL 1007/1569, CSA TR-64 / Black | 100 | 30,5 | 3050 |
| | UL 1007/1569, CSA TR-64 / Red | 100 | 30,5 | 3050 |
| | UL 1007/1569, CSA TR-64 / Green | 100 | 30,5 | 3050 |
| | UL 1007/1569, CSA TR-64 / Blue | 100 | 30,5 | 3050 |
| | Cut and Strip Tool | | | |



Toll Free: 1-800-52 ALPHA • Telephone: 908-925-8000 • Fax: 908-925-6923
 Europe/UK Telephone: +44 (0) 1932 772422 • Europe/UK Fax: +44 (0) 1932 772433

Web Site: www.alphawire.com
 Email: info@alphawire.com