



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





Surface Mount Multilayer Ceramic Chip Capacitor Solutions for High Voltage Applications



FEATURES

- Excellent reliability and thermal shock performance
- High voltage breakdown compared to standard design
- High reliable serial electrode design
- Protective surface coating may be required to prevent surface arcing
- Wet build process
- Reliable Noble Metal Electrode (NME) system
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912



RoHS
COMPLIANT
HALOGEN
FREE
GREEN
(5-2008)

APPLICATIONS

- Input filter capacitors
- Output filter capacitors
- Snubber capacitors reduce MOSFET voltage spikes
- Filtering for switching power supplies
- For lighting and other AC applications please contact: mlcc@vishay.com

ELECTRICAL SPECIFICATIONS

| X7R |
|--|
| <p>GENERAL SPECIFICATION</p> <p>Note Electrical characteristics at +25 °C unless otherwise specified</p> <p>Operating Temperature: -55 °C to +125 °C</p> <p>Capacitance Range: 180 pF to 15 nF</p> <p>Voltage Range: 3000 V_{DC}, 4000 V_{DC}, 5000 V_{DC}</p> <p>Temperature Coefficient of Capacitance (TCC): ± 15 % from -55 °C to +125 °C, with 0 V_{DC} applied</p> <p>Dissipation Factor (DF): 2.5 % maximum at 1.0 V_{RMS} and 1 kHz</p> <p>Insulating Resistance: at +25 °C 100 000 MΩ min. or 1000 ΩF whichever is less at +125 °C 10 000 MΩ min. or 100 ΩF whichever is less</p> <p>Aging Rate: 1 % maximum per decade</p> <p>Dielectric Strength Test: performed per method 103 of EIA 198-2-E Applied test voltages 3000 V_{DC}- / 4000 V_{DC}- / 5000 V_{DC}-rated: min. 120 % of rated voltage</p> |

| QUICK REFERENCE DATA | | | | |
|----------------------|------|---------------------|-------------|---------|
| DIELECTRIC | CASE | MAXIMUM VOLTAGE (V) | CAPACITANCE | |
| | | | MINIMUM | MAXIMUM |
| X7R | 1812 | 5000 | 180 pF | 3.9 nF |
| | 1825 | 5000 | 330 pF | 10 nF |
| | 2220 | 5000 | 390 pF | 10 nF |
| | 2225 | 5000 | 470 pF | 15 nF |

Note

- Detail ratings see “Selection Chart”

| ORDERING INFORMATION | | | | | | | | |
|------------------------------|------------|--|---------------------------------------|--|--|--------------|---|-------------------|
| HV2220 | Y | 152 | K | X | M | A | T | HV ⁽²⁾ |
| CASE CODE | DIELECTRIC | CAPACITANCE NOMINAL CODE | CAPACITANCE TOLERANCE | TERMINATION | DC VOLTAGE RATING ⁽¹⁾ | MARKING | PACKAGING | PROCESS CODE |
| 1812 1825 2220 2225 | Y = X7R | Expressed in picofarads (pF). The first two digits are significant, the third is a multiplier. Examples 152 = 1500 pF | J = ± 5 % K = ± 10 % M = ± 20 % | X = Ni barrier 100 % tin plated matte finish | H = 3000 V V = 4000 V M = 5000 V | A = unmarked | T = 7" reel / plastic tape R = 11 1/4" / 13" reel / plastic tape | HV = high voltage |

Notes

- (1) DC voltage rating should not be exceeded in application. Other application factors may affect the MLCC performance. Consult for questions: mlcc@vishay.com
- (2) Process code with 2 digits has to be added.

| ENVIRONMENTAL STATUS | | | |
|----------------------|--|----------------|--------------|
| TERMINATION CODE | TERMINATION DESCRIPTION | RoHS COMPLIANT | VISHAY GREEN |
| X | Ni barrier 100 % tin plated matte finish | Yes | Yes |

| DIMENSIONS in inches (millimeters) | | | | | | |
|------------------------------------|--------|--------------------------------|--------------------------------|-----------------------|---------------------|--------------|
| | | | | | | |
| CASE CODE | STYLE | LENGTH (L) | WIDTH (W) | MAXIMUM THICKNESS (T) | TERMINATION PAD (P) | |
| | | | | | MINIMUM | MAXIMUM |
| 1812 | HV1812 | 0.177 ± 0.012 (4.50 ± 0.30) | 0.126 ± 0.008 (3.20 ± 0.20) | 0.106 (2.70) | 0.010 (0.25) | 0.030 (0.76) |
| 1825 | HV1825 | 0.177 ± 0.012 (4.50 ± 0.30) | 0.252 ± 0.010 (6.40 ± 0.25) | 0.106 (2.70) | 0.010 (0.25) | 0.030 (0.76) |
| 2220 | HV2220 | 0.220 ± 0.010 (5.59 ± 0.25) | 0.200 ± 0.010 (5.08 ± 0.25) | 0.106 (2.70) | 0.010 (0.25) | 0.030 (0.76) |
| 2225 | HV2225 | 0.220 ± 0.010 (5.59 ± 0.25) | 0.250 ± 0.010 (6.35 ± 0.25) | 0.106 (2.70) | 0.010 (0.25) | 0.030 (0.76) |



| SELECTION CHART | | | | | | | | | | | | | |
|----------------------------|--------|-----------------------|------------------|------|-----------------------|------------------|------|-----------------------|------------------|------|-----------------------|------|------|
| DIELECTRIC | | X7R | | | | | | | | | | | |
| STYLE | | HV1812 ⁽¹⁾ | | | HV1825 ⁽¹⁾ | | | HV2220 ⁽¹⁾ | | | HV2225 ⁽¹⁾ | | |
| EIA CODE | | 1812 | | | 1825 | | | 2220 | | | 2225 | | |
| VOLTAGE (V _{DC}) | | 3000 | 4000 | 5000 | 3000 | 4000 | 5000 | 3000 | 4000 | 5000 | 3000 | 4000 | 5000 |
| VOLTAGE CODE | | H | V | M | H | V | M | H | V | M | H | V | M |
| CAP. CODE | CAP. | | | | | | | | | | | | |
| 101 | 100 pF | | | | | | | | | | | | |
| 121 | 120 pF | | | | | | | | | | | | |
| 151 | 150 pF | | | | | | | | | | | | |
| 181 | 180 pF | | | • | | | | | | | | | |
| 221 | 220 pF | | • | • | | | | | | | | | |
| 271 | 270 pF | | • | • | | | | | | | | | |
| 331 | 330 pF | | • | • | | • | • | | | | | | |
| 391 | 390 pF | | • | • | | • | • | | | • | | | |
| 471 | 470 pF | | • | • | | • | • | | • | • | | | • |
| 561 | 560 pF | • | • | • | | • | • | | • | • | | | • |
| 681 | 680 pF | • | • | • | | • | • | | • | • | | • | • |
| 821 | 820 pF | • | • | • | | • | • | | • | • | | • | • |
| 102 | 1.0 nF | • | • | | | • | • | | • | • | | • | • |
| 122 | 1.2 nF | • | • | | | • | • | • | • | • | | • | • |
| 152 | 1.5 nF | • | • ⁽²⁾ | | | • | • | • | • | • | | • | • |
| 182 | 1.8 nF | • | | | | • | • | • | • | • | • | • | • |
| 222 | 2.2 nF | • | | | | • | • | | • | • | | • | • |
| 272 | 2.7 nF | • ⁽²⁾ | | | | • | • | | • | • | | • | • |
| 332 | 3.3 nF | • ⁽²⁾ | | | | • | • | | • | • | | • | • |
| 392 | 3.9 nF | • ⁽²⁾ | | | | • | | | • | | | • | • |
| 472 | 4.7 nF | | | | | • | | | • | | | • | • |
| 562 | 5.6 nF | | | | | • ⁽²⁾ | | | • ⁽²⁾ | | | • | • |
| 682 | 6.8 nF | | | | | • ⁽²⁾ | | | • ⁽²⁾ | | | • | |
| 822 | 8.2 nF | | | | | • ⁽²⁾ | | | • ⁽²⁾ | | | • | |
| 103 | 10 nF | | | | | • ⁽²⁾ | | | • ⁽²⁾ | | | • | |
| 123 | 12 nF | | | | | | | | | | | • | |
| 153 | 15 nF | | | | | | | | | | | • | |
| 183 | 18 nF | | | | | | | | | | | | |


Notes

- (1) See soldering recommendations within this data book, or visit: www.vishay.com/doc?45034
- (2) Rating use lower packaging quantity, see "Standard Packaging Quantities" chart




X7R DIELECTRIC - TYPICAL PARAMETERS


TEMPERATURE COEFFICIENT OF CAPACITANCE

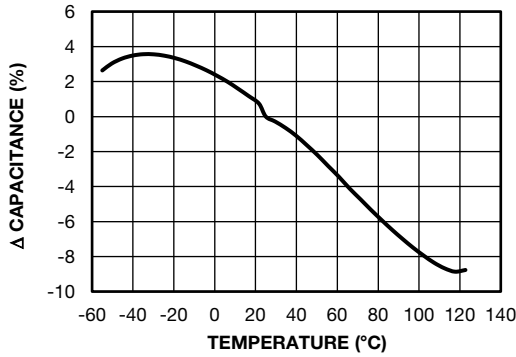


AGING RATE

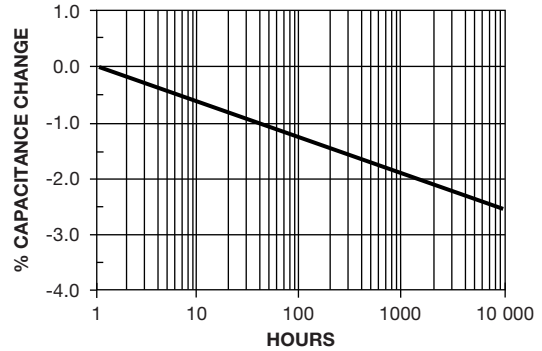


DISSIPATION FACTOR VS. TEMPERATURE

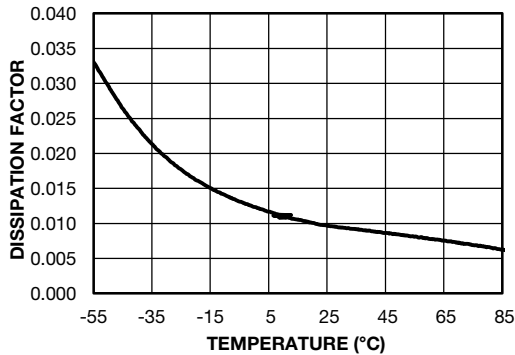


IMPEDANCE / ESR VS. FREQUENCY HV1812Y181KXMATHV

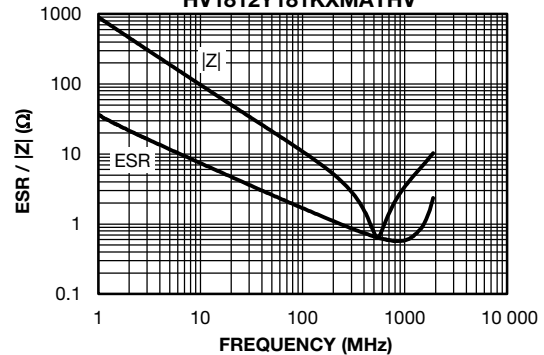

IMPEDANCE / ESR VS. FREQUENCY HV1812Y152KXVATHV


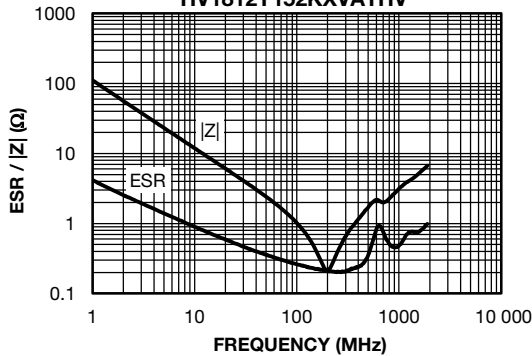


IMPEDANCE / ESR VS. FREQUENCY HV1825Y182KXMATHV

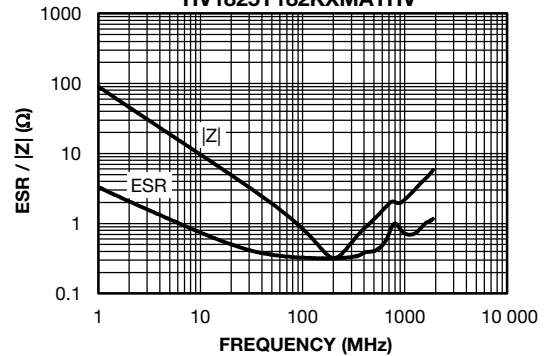



X7R DIELECTRIC - TYPICAL PARAMETERS

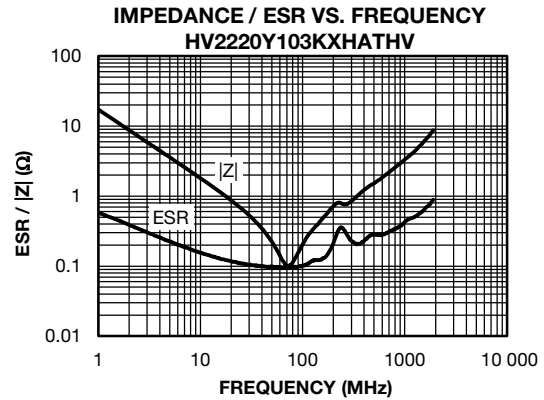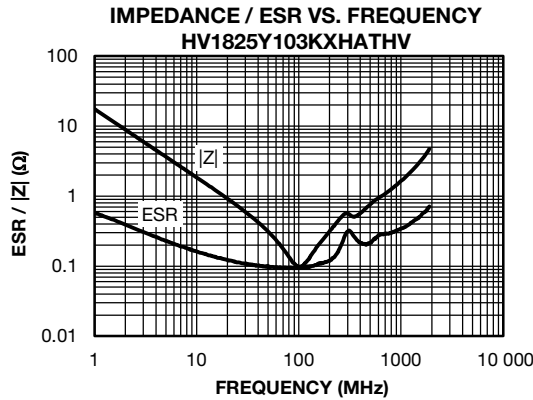

STANDARD PACKAGING QUANTITIES (1)

| CASE CODE | TAPE SIZE | 7" REEL QUANTITIES PACKAGING CODE "T" | 11 1/4" AND 13" REEL QUANTITIES PACKAGING CODE "R" |
|-----------|-----------|--|--|
| 1812 | 12 mm | 500 (2) / 1000 | 4000 |
| 1825 | 12 mm | 500 (2) / 1000 | 4000 |
| 2220 | 12 mm | 500 (2) / 1000 | 4000 |
| 2225 | 12 mm | 500 | 4000 |

Notes

- (1) Reference: EIA standard RS 481 - "Taping of Surface Mount Components for Automatic Placement"
- (2) Lower quantity for certain ratings, see "Selection Chart"

STORAGE AND HANDLING CONDITIONS

- (1) Store the components at 5 °C to 40 °C ambient temperature and ≤ 70 % relative humidity conditions.
- (2) The product is recommended to be used within a time-frame of 2 years after shipment.
Check solderability in case extended shelf life beyond the expiry date is needed.

Precautions:

- a. Do not store products in an environment containing corrosive elements, especially where chloride gas, sulfide gas, acid, alkali, salt or the like are present. This may cause corrosion or oxidization of the terminations, which can easily lead to poor soldering.
- b. Store products on the shelf and avoid exposure to moisture or dust.
- c. Do not expose products to excessive shock, vibration, direct sunlight and so on.



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.