mail

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





1


2

FCIconnect.com

FCi

3


PRODUCT NUMBER	PITCH
HWxxA0x200J0G	7.50 mm




Dimension								
DIM L	(N-1)×7.50+5.7							
DIM A	(N-1)×7.50+5.0							
DIM B	(N-1)×7.50							
DIM C	(N-1)×7.50+12.2							
DIM D	(N-1)×7.50+17.1							
N=Number of poles								
POLES	Tolerance							
2р-6р	±0.15							
7p-12p	±0.20							
13p-16p	±0.30							

15.0

....







4

А

2P mark

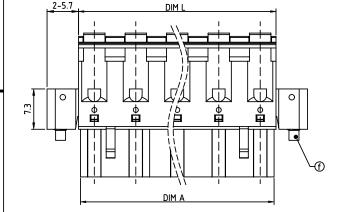



1

26.0 24.1 Ś e 2.9 Թ 5.8 1.2 SECTION P-P

Material: ●Item@Top body:Thermoplastic (UL94V-0) ●Item
Bottom body:Thermoplastic (UL94V-0) Item@borrow bogrmermoptastic (0L94V-0) Orange(RAL2011/P)
Item@Spring clamp:Stainless Steel ●Item@Female contact:PhBz (CuSn) Tin plated ●Item⊕Flange screw:Steel Zinc plating M2.5 solt "+/-"combination type

Electrical	cULus
Voltage rating:	300V
●Current rating:	10 A
●Solid wire(AWG):	12-26
Stranded wire(AWG):	12-26
Wire strip length:	8-9mm
Withstanding Voltage:	1.6KV
Operating temperature:	-40°C to +115°C
Safety Approval:	c Fl us

ma	ťl. d	code	;			surf	ace	/	tole	rand	ce	pro	jecti	ion	pro	duct	far	mily							
						ASME Y14.5 V ASME Y14.5								1	TERMINAL BLOCK										
ltr	ecn	no	dr	dat	е	tolera	nces u	inless	otherw	ise sp	ecified	4	\mathcal{P}	コ	title										
						angl	۳ p		X.±	0.5			ΜМ		TERMINAL BLOCK										
							⊆		X.X±	:0.3						SPRING CLAMP.PLUGGABLE PLUG.WITH FLANGE									
						X•+	1. _		X.XX:	±0.1		sca	le			TACT									
						dr	EVIN	I ZHO	DNG	051	614				dwg no sheet 1 of 1 s								size		
						engr	EVIN	I ZHO			614		C		HWxxA0x200J0G				A4						
						chr	HAN	KE F			051614		FÇ				111 1	A02200300 A4						4	
						appd	S⊦	II JU	JUN 051						type			CUSTOMER Dra				wing	E		
she	et	revi	sion	Α																					
ind	ex	she	et	1																					
							PDS: Rev :A 3 STATU							JS:Released					Printed: Jul 23, 2014						

В

А

2