



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Single Output Medical Power Supplies

Features

- ◆ Limited Lifetime Warranty
- ◆ Medical Certifications²
- ◆ Universal Input (85 - 265VAC)
- ◆ High Efficiency
- ◆ Broad 30W to 1500W product range

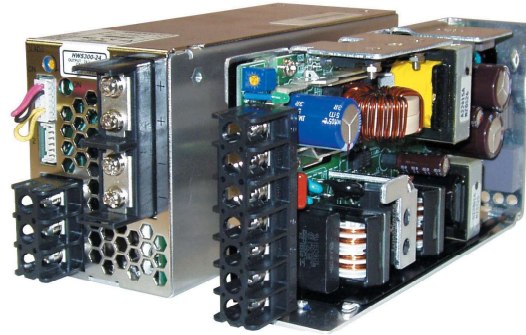

Key Market Segments & Applications



Medical



RoHS

Specifications						
Model		HWS30A HWS50A	HWS100A HWS150A	HWS300	HWS600	HWS1000 HWS1500
Input Voltage range (47-63Hz)	-	85 - 265VAC (47 - 63Hz) or 120 - 370VDC*		85 - 265VAC (47 - 63Hz) or 120 - 330VDC*		85 - 265VAC (47 - 63Hz)
Input Current (Typ) (1)	A	0.65 / 0.4 0.65 / 0.35	1.3 / 0.65 1.9 / 0.95	4.1 / 2.1	8.1 / 3.9	13.5 / 7.0 19 / 10
Inrush Current (1)	A	14 / 28		20 / 40		
Power Factor / Flicker	-	Meets EN61000-3-2, EN61000-3-3				
Temperature Coefficient	-	<0.02%/°C				
Overcurrent Protection	-	>104%				
Overvoltage Protection	V	yes (See table on page 2)				
Hold Up Time (Typ)	ms	20				
Leakage Current (60Hz)	mA	<0.5mA				
Remote Sense	-	No		Yes		
Indicator	-	Green LED = ON				
Remote On/Off	-	No		Yes (Isolated from output)		
Parallel operation	-	No		Single wire connection (5 units max)		
DC Good	-	No		Yes		
Voltage Programming	-			No		Yes
Operating Temperature and Derating	°C	HWS30A-150A: -10°C to +70°C, (See website for derating above 50°C) HWS300-1500: -10°C to +70°C, (-10 - +50°C: 100%, derate linearly to 50% load from +50 to +70°C)				
Storage Temperature	°C	-30 to +85°C				
Humidity (non condensing)	-	Operating: 30 - 90%RH (10 - 90% on HWS300-1500), Non operating 10 - 95%RH				
Cooling	-	Convection		Internal fan		
Withstand Voltage (3)	-	Input to Ground 2kVAC, Input to Output 3kVAC, Output to Ground 500VAC, Output to Remote On/Off 100VAC for 1 min.				
Isolation Resistance	-	>100M at 25°C & 70%RH, Output to Ground 500VDC, >10M Output to remote on/off 100VDC				
Vibration (non operating)	-	10 - 55Hz (1 min sweep), 19.6m/s ² constant, X, Y, Z axis, one hour each				
Shock (in packaging)	-	< 196.1m/s ²				
Safety Agency Certifications (2)	-	ES60601-1, EN60601, CSA-C22.2 No601.1-M90 (C-UL) (basic insulation), CE Mark				
Line Dip	-	Complies with SEMI F47 (200VAC line only)				
Conducted & Radiated EMI	-	EN55011 / EN55032-B, FCC-B, VCCI-B (HWS600, 1000 & 1500 Class A)				
Immunity	-	IEC61000-4-2, -3, -4, -5, -6, -8, -11, IEC61000-6-2, IEC60601-1-2 Ed.4***				
Weight (Typ)	g	200 260	420 470	1000	1600	3200 3800
Size (WxHxD)	in	1.04x3.23x3.74 1.04x3.23x4.72	1.1x3.23x6.3 1.46x3.23x6.3	2.4x3.23x6.5	3.94x3.23x6.5	4.98x3.23x9.45 4.98x3.23x11.02
MTBF - Telcordia SR-332 issue 3**	hours	8,169,868	2,963,512	2,145,809	1,998,996	1,087,031
Warranty	yrs	3,726,622	2,676,081	2,145,809	1,998,996	1,152,309
Limited lifetime warranty (See website for terms & conditions)						

(1) 100/200VAC input

(2) See clause 19.5DV.2 of UL60601 for equipment in proximity of patient

(3) HWS300-600 2.5kVAC Input to ground

* Safety certified for AC input only

** 24V output model, 25°C ambient, full load, 230VAC input

*** HWS30A-150A/ME only (See immunity data on website)

Output Ratings										
Model	Voltage	Adjust Range	Max Current (A)	Max Power (W)	Load Reg(mV)	Line Reg(mV)	Ripple Noise(mV)	Overvoltage (V)	Efficiency (typ) % ⁽¹⁾	
HWS30A-5/ME	5V	4.0 - 6.0	6	30	40	20	120	6.25-7.25	80/82	
HWS50A-5/ME	5V	4.0 - 6.0	10	50	40	20	120	6.25-7.25	82/84	
HWS100A-5/ME	5V	4.0 - 6.0	20	100	40	20	120	6.25-7.25	84/86	
HWS150A-5/ME	5V	4.0 - 6.0	30	150	40	20	120	6.25-7.25	85/87	
HWS600-5/ME	5V	4.0 - 6.0	120	600	30	20	120	6.25-7.25	80/83	
HWS30A-12/ME	12V	9.6 - 14.4	2.5	30	96	48	150	15-17.4	84/86	
HWS50A-12/ME	12V	9.6 - 14.4	4.3	51.6	96	48	150	15-17.4	83/85	
HWS100A-12/ME	12V	9.6 - 14.4	8.5	102	96	48	150	15-17.4	86/88	
HWS150A-12/ME	12V	9.6 - 14.4	13	156	96	48	150	15-17.4	85/88	
HWS300-12/ME	12V	9.6 - 14.4	27	324	72	48	150	15-17.4	80/83	
HWS600-12/ME	12V	9.6 - 14.4	53	636	72	48	150	15-17.4	80/83	
HWS30A-15/ME	15V	12.0 - 18.0	2	30	120	60	150	18.8-21.8	85/87	
HWS50A-15/ME	15V	12.0 - 18.0	3.5	52.5	120	60	150	18.8-21.8	83/86	
HWS100A-15/ME	15V	12.0 - 18.0	7	105	120	60	150	18.8-21.8	86/88	
HWS150A-15/ME	15V	12.0 - 18.0	10	150	120	60	150	18.8-21.8	86/89	
HWS300-15/ME	15V	12.0 - 18.0	22	330	90	60	150	18.8-21.8	80/83	
HWS600-15/ME	15V	12.0 - 18.0	43	645	90	60	150	18.8-21.8	81/84	
HWS30A-24/ME	24V	19.2 - 28.8	1.3	31.2	150	96	150	30-34.8	86/88	
HWS50A-24/ME	24V	19.2 - 28.8	2.2	52.8	150	96	150	30-34.8	84/87	
HWS100A-24/ME	24V	19.2 - 28.8	4.5	108	150	96	150	30-34.8	87/89	
HWS150A-24/ME	24V	19.2 - 28.8	6.5	156	150	96	150	30-34.8	88/90	
HWS300-24/ME	24V	19.2 - 28.8	14 (16.5 pk) ⁽⁴⁾	336, (396 pk) ⁽⁴⁾	144	96	150	30-34.8	82/85	
HWS600-24/ME	24V	19.2 - 28.8	27 (31 pk) ⁽⁴⁾	648, (744 pk) ⁽⁴⁾	144	96	150	30-34.8	82/85	
HWS1000-24/ME	24V	19.2 - 28.8	46 (58.5 pk) ⁽⁴⁾	1104, (1404 pk) ⁽⁴⁾	150	96	150	30-34.8	85/87	
HWS1500-24/ME	24V	19.2 - 28.8	65/70 ⁽¹⁾ (105 pk) ⁽⁴⁾	1560/1680 ⁽¹⁾ , (2520 pk) ⁽⁴⁾	144	96	200	30-34.8	84/88	
HWS1000-36/ME	36V	28.8 - 43.2	30.7 (39 pk) ⁽⁴⁾	1104, (1404 pk) ⁽⁴⁾	150	144	200	45-49.7	85/88	
HWS1500-36/ME	36V	28.8 - 43.2	42/46.5 ⁽¹⁾ (70 pk) ⁽⁴⁾	1512/1674 ⁽¹⁾ , (2520 pk) ⁽⁴⁾	150	144	200	45-49.7	84/88	
HWS30A-48/ME	48V	38.4 - 52.8	0.65	31.2	240	192	200	55.2-64.8	86/87	
HWS50A-48/ME	48V	38.4 - 52.8	1.1	52.8	240	192	200	55.2-64.8	84/86	
HWS100A-48/ME	48V	38.4 - 52.8	2.1	100.8	240	192	200	55.2-64.8	88/90	
HWS150A-48/ME	48V	38.4 - 52.8	3.3	158.4	240	192	200	55.2-64.8	89/91	
HWS300-48/ME	48V	38.4 - 52.8	7	336	288	192	350	55.2-64.8	82/85	
HWS600-48/ME	48V	38.4 - 52.8	13	624	288	192	350	55.2-64.8	83/86	
HWS1000-48/ME	48V	38.4 - 52.8	23 (29.2 pk) ⁽⁴⁾	1104, (1404 pk) ⁽⁴⁾	300	192	200	55.2-60.8	86/88	
HWS1500-48/ME	48V	38.4 - 52.8	32	1536	288	192	200	55.2-64.8	86/90	

(1) 100/200VAC input

(2) See clause 19.5DV.2 of UL60601 for equipment in proximity of patient

(3) HWS300-600 2.5kVAC Input to ground

(4) Peak load at 200VAC input for 10s maximum on time, 35% duty cycle

(5) Using voltage programming input - see installation manual for details

Options	
Suffix	Description
/ME	No Cover (HWS30A-150A/ME Only)
	HWS300-1500/ME the cover is always fitted
/MEA	With Cover (HWS30A-150A/ME only)

Other Medical Products	
NV Series	175 to 700W single & multiple output
Vega Series	450 to 900W single & multiple output
Alpha Series	1000W single and multiple output

For Additional Information, please visit
us.tdk-lambda.com/lp/products/hwsa-series.htm

