



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




## Current Transducers HY 50-P

For the electronic measurement of currents : DC, AC, pulsed, mixed, with a galvanic isolation between the primary circuit (high power) and the secondary circuit (electronic circuit).



$$I_{PN} = 50 \text{ A}$$



### Electrical data

Primary nominal current rms $I_{PN}$ (A)	Primary current, measuring range $I_{PM}$ (A)	Primary conductor (mm)	Type	RoHS since date code
50	± 150	1.6 x 3.5	<b>HY 50-P</b>	45259
$V_C$	Supply voltage (± 5 %)		± 15	V
$I_C$	Current consumption		± 10	mA
$\hat{I}_P$	Overload capability (1 ms)		$50 \times I_{PN}$	
$V_d$	Rms voltage for AC isolation test, 50 Hz, 1 min		2.5	kV
$V_b$	Rated isolation voltage rms		500 <sup>1)</sup>	V
$R_{IS}$	Isolation resistance @ 500 VDC		> 1000	MΩ
$V_{OUT}$	Output voltage (Analog) @ ± $I_{PN}$ , $R_L = 10 \text{ k}\Omega$ , $T_A = 25^\circ\text{C}$		± 4	V
$R_{OUT}$	Output internal resistance		100	Ω
$R_L$	Load resistance		> 1	kΩ

### Accuracy - Dynamic performance data

<b>X</b>	Accuracy @ $I_{PN}$ , $T_A = 25^\circ\text{C}$ (excluding offset)	< ± 1	%
$\epsilon_L$	Linearity error <sup>2)</sup> ( $0 \dots \pm I_{PN}$ )	< ± 1	% of $I_{PN}$
$V_{OE}$	Electrical offset voltage @ $T_A = 25^\circ\text{C}$	< ± 40	mV
$V_{OH}$	Hysteresis offset voltage @ $I_p = 0$ , after an excursion of $1 \times I_{PN}$	< ± 15	mV
$TCV_{OE}$	Temperature coefficient of $V_{OE}$	typ. ± 1.5 max. ± 3	mV/K mV/K
$TCV_{OUT}$	Temperature coefficient of $V_{OUT}$ (% of reading)	< ± 0.1	%/K
$t_r$	Response time to 90% of $I_{PN}$ step	< 3	μs
<b>di/dt</b>	di/dt accurately followed	> 50	A/μs
<b>BW</b>	Frequency bandwidth <sup>3)</sup> (- 3 dB)	DC .. 50	kHz

### General data

$T_A$	Ambient operating temperature	- 10 .. + 80	°C
$T_S$	Ambient storage temperature	- 25 .. + 85	°C
<b>m</b>	Mass	< 14	g
	Standards <sup>4)</sup>	EN 50178: 1997	

### Features

- Hall effect measuring principle
- Galvanic isolation between primary and secondary circuit
- Isolation voltage 2500 V~
- Compact design for PCB mounting
- Low power consumption
- Extended measuring range ( $3 \times I_{PN}$ )
- Insulated plastic case recognized according to UL 94-V0.

### Advantages

- Easy mounting
- Small size and space saving
- Only one design for wide current ratings range
- High immunity to external interference.


### Applications

- General purpose inverters
- Switched-Mode Power Supplies (SMPS)
- AC motor speed control
- Battery supplied applications
- Uninterruptible Power Supplies (UPS)
- Power supplies for welding applications.

### Application domain

- Industrial

**Notes :** <sup>1)</sup> Pollution class 2, overvoltage category III.  
<sup>2)</sup> Linearity data exclude the electrical offset.  
<sup>3)</sup> Please refer to derating curves in the technical file to avoid excessive core heating at high frequency.  
<sup>4)</sup> Please consult characterisation report for more technical details and application advice.

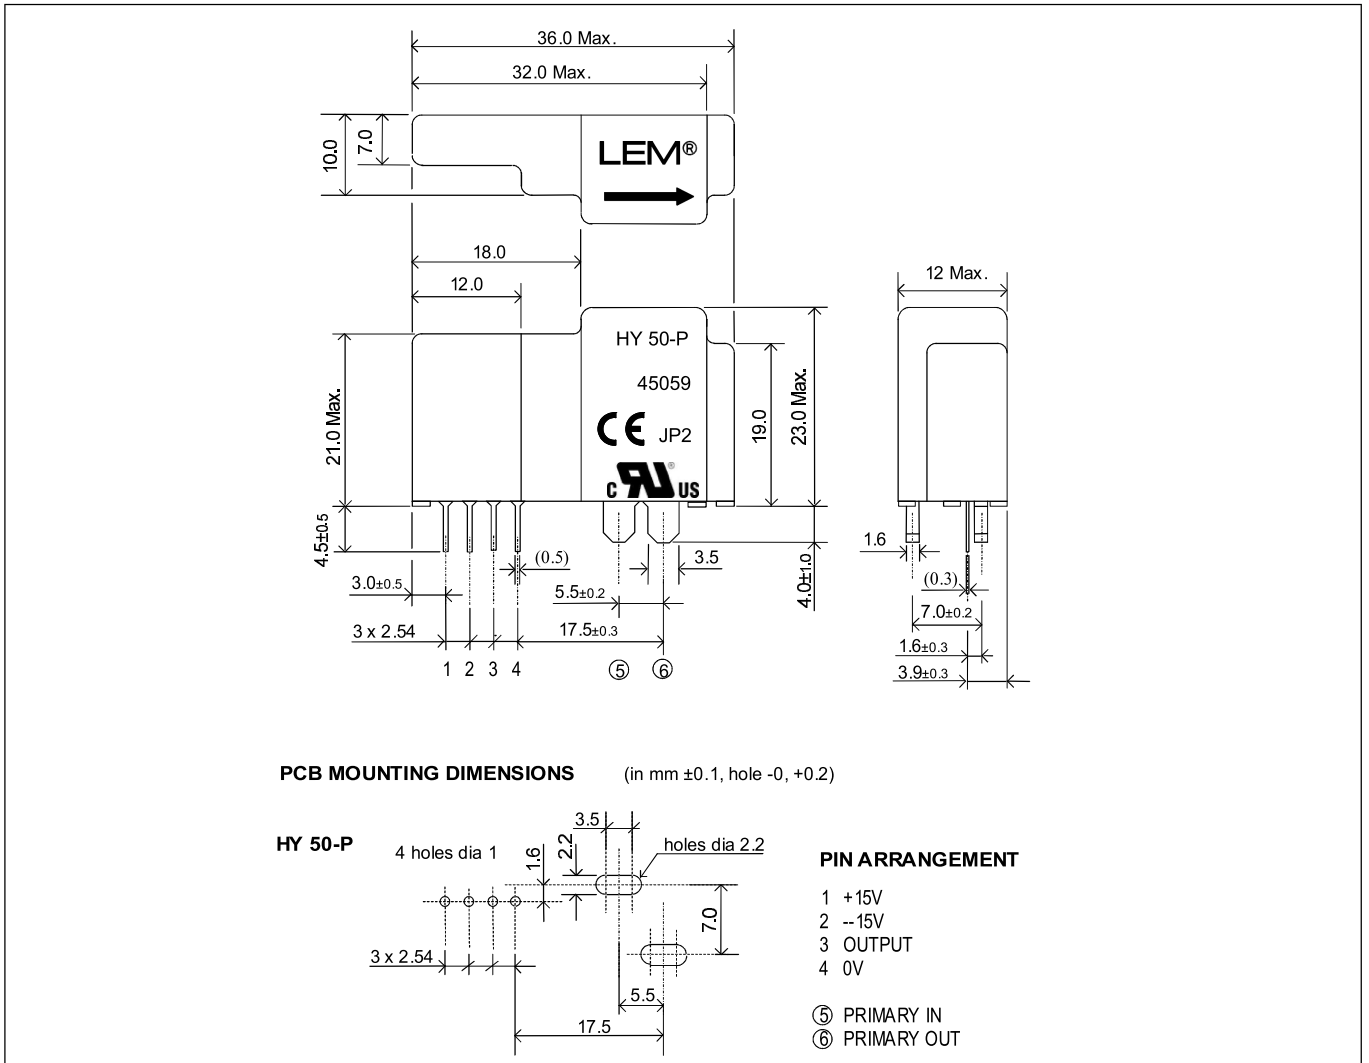**Dimensions HY 50-P** (in mm. 1 mm = 0.0394 inch)

**Safety**


This transducer must be used in electric/electronic equipment with respect to applicable standards and safety requirements in accordance with the following manufacturer's operating instructions.



Caution, risk of electrical shock

When operating the transducer, certain parts of the module can carry hazardous voltage (eg. primary busbar, power supply). Ignoring this warning can lead to injury and/or cause serious damage.

This transducer is a built-in device, whose conducting parts must be inaccessible after installation.

A protective housing or additional shield could be used.

Main supply must be able to be disconnected.