

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







HZ0603C601R-10


UNCONTROLLED DOCUMENT

PHYSICAL DIMENSIONS:

Α	1.60	[.063]	[±] 0.15	[.006]
В	0.80	[.031]	± 0.15	[.006]

C 0.80 [.031] ± 0.15 [.006]


D 0.36 [.014] ± 0.15 [.006]

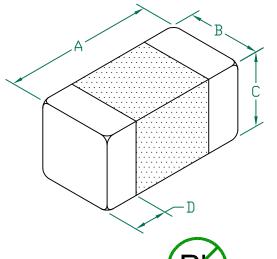

NOTES: UNLESS OTHERWISE SPECIFIED


- 1. TAPED AND REELED per CURRENT EIA SPECIFICATIONS 7" REELS, 4000 PCS/REEL.
- 2. TERMINATION FINISH IS 100% TIN.
- 3. COMPONENTS SHOULD BE ADEQUATELY PREHEATED BEFORE SOLDERING.
- 4. OPERATING TEMP. RANGE: -40°C~+125°C (INCLUDING SELF-HEATING)

Z vs FREQUENCY IMPEDANCE UNDER DC BIAS

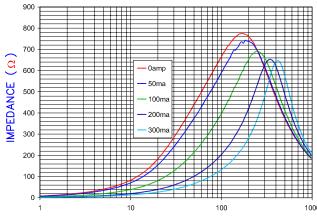

FREQUENCY (MHz)

LAND PATTERNS FOR REFLOW SOLDERING



(For wave soldering, add 0.762 (.030) to this dimension)


В

UPDATE COMPANY LOGO ADD ROHS

ORIGINAL DRAFT

DESCRIPTION

RECOMMENDED SOLDERING CONDITIONS

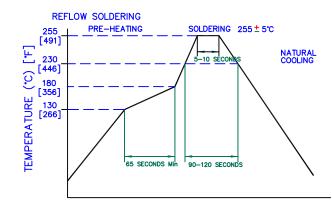


03/26/04

HZ0603C601R-10-D

TMB

2 of 2

NTS

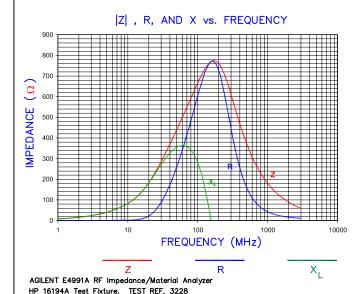



DIMENSIONS ARE IN mm [INCHES].				This print is the property of Laird			
				Tech, and is loaned in confidence subject to return upon request and	a 🔳	_ =	
				with the understanding that no	4	Lair	
				copies shall be made without the		. 4 11 (
				written consent of Laird Tech. All rights to design or invention are			
				reserved.			
)	ADD OPERATING TEMPERATURE	08/05/13			REV	PART TYPE:	
	OFDATE LAIRD LOGO AND REFLOW CORVE			HZ0603C601R-10	D	CO-FIRE	
;	CHANGE SOLDERING TEMPERATURE FROM 250	07/12/10	JUN	1120000001111 10	_	00 11112	

02/27/08 JRK DATE:

03/26/04 TMB CAD #