



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



APP: GAL	ECN: 000789	APP: HS	DATE: 08/23/95	TITLE: ICL THERMISTOR	THIS DOCUMENT IS THE PROPERTY OF FENWAL ELECTRONICS AND IS SUBMITTED IN CONFIDENCE. NEITHER THIS DOCUMENT, NOR THE INFORMATION CONTAINED HEREIN, IS TO BE USED DIRECTLY OR INDIRECTLY, IN ANY WAY DETRIMENTAL TO THE INTEREST OF FENWAL ELECTRONICS AND IS NOT TO BE DISCLOSED OR UTILIZED WITHOUT WRITTEN PERMISSION.
DATE: 7/08/03	ECN:	CH:			
APP: DATE:	APP: DATE:	APP: DATE:	APP: DATE:	UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES. DIMENSIONS IN [] ARE IN MM.	
APP: DATE:	APP: DATE:	APP: DATE:	APP: DATE:	GENERAL TOLERANCES FRACTIONS: $\pm 1/32$ ANGLES: $\pm .5^\circ$ DECIMALS: .XX \pm .01 .XXX \pm .005	
REVISIONS	SCALE: 1"=1"0"	USED ON:	MATERIAL:	FINISH:	DWG. NO: ICL227R010-01 SHEET 1 OF 1

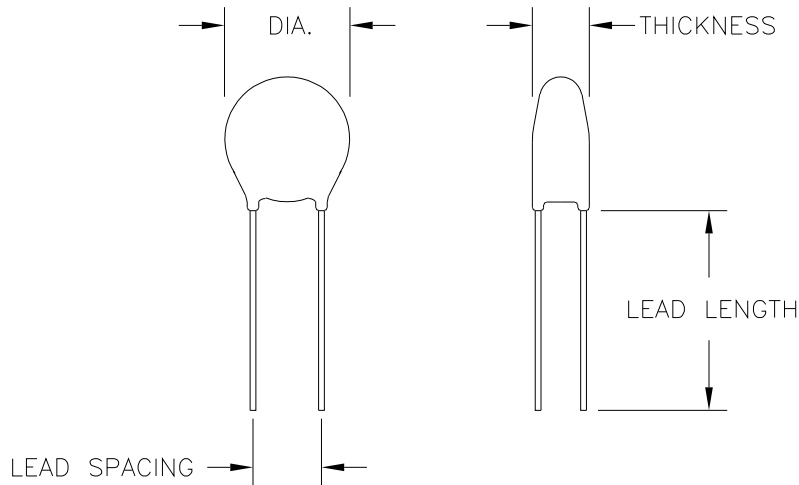

DIAMETER	.866 MAX
THICKNESS	.275 MAX
LEAD SPACING	.310 NOM
LEAD LENGTH	1.25 MIN
LEAD MATERIAL	18 AWG (.040 DIA.) TINNED COPPER
COATING	BLACK SILICONE
RESISTANCE	7 OHMS $\pm 20\%$ AT 25°C
MAXIMUM CONTINUOUS CURRENT (Imax)	10 AMPS
RESISTANCE AT Imax	0.08 OHMS NOM
MAXIMUM VOLTAGE RATING	265 VAC (RMS)
MAXIMUM SURGE RATING	100 JOULES