



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



DO NOT SCALE FROM THIS PRINT

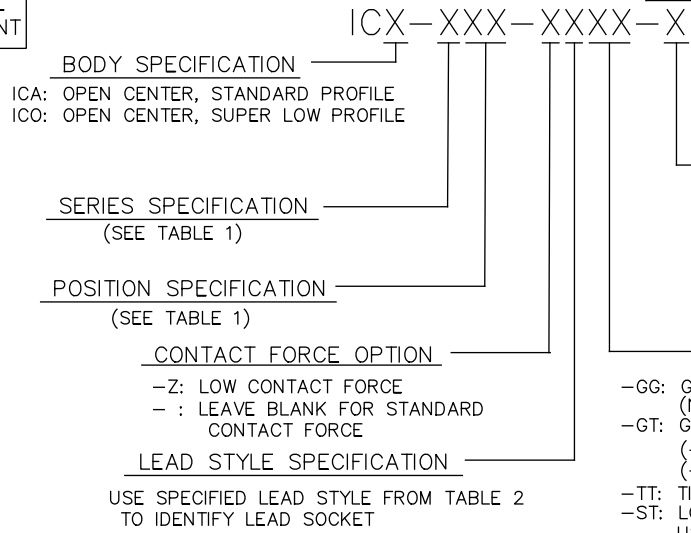

- OPTION #1**
- L: LOCKING LEAD (USE SC-1L1-GT: STYLE -S, -ZS ONLY)
 - 2: STYLE -W ONLY (SEE TABLE 2)
 - 3: STYLE -W ONLY (SEE TABLE 2)

- PLATING SPECIFICATION**
- GG: GOLD/GOLD- SPECIFY -GG IN SOCKET SUFFIX -XX (NOT AVAILABLE ON -F & -K LEAD STYLE)
 - GT: GOLD/TIN- SPECIFY -GT IN SOCKET SUFFIX -XX (-F LEAD STYLE AVAILABLE FOR EXISTING CUSTOMERS ONLY) (-E LEAD STYLE EZ-2P3 AVAILABLE FOR EXISTING CUSTOMERS ONLY)
 - TT: TIN/TIN- SPECIFY -TT IN SOCKET SUFFIX -XX (STYLES -S, -ZS, -W, -ZW, -A, -C, -L, -M, -N ONLY)
 - ST: LOW GOLD/TIN - SPECIFY -ST IN SOCKET SUFFIX -XX(-S & -ZS ONLY)(ON -L OPTION USE SC-1L1-GT OR EZ-1L1-GT ONLY)
 - EE: EXTRA HEAVY GOLD/EXTRA HEAVY GOLD-SPECIFY -EE IN SOCKET SUFFIX -XX(STYLES -S & -ZS ONLY)
 - EG: EXTRA HEAVY GOLD/GOLD- SPECIFY -EG IN SOCKET SUFFIX -XX(STYLES -S & -ZS ONLY)
 - ET: EXTRA HEAVY GOLD/TIN- SPECIFY -ET IN SOCKET SUFFIX -XX(STYLES -S & -ZS ONLY)
 - GE: GOLD/EXTRA HEAVY GOLD- SPECIFY -GE IN SOCKET SUFFIX -XX(STYLES -S & -ZS ONLY)
 - TE: TIN/EXTRA HEAVY GOLD- SPECIFY -TE IN SOCKET SUFFIX -XX(STYLES -S & -ZS ONLY)

- NOTES:**
1. MINIMUM PUSHOUT FORCES:
ICA ASSEMBLY: 5 LBS.
ICE ASSEMBLY: 10 LBS.
ICO ASSEMBLY: 5 LBS.
 2. MAXIMUM ALLOWABLE BOW:
.003 [.08] INCH PER INCH.
 3. -GG PLATING OPTION NOT AVAILABLE ON SC-2P3-XX OR EZ-1S1-XX.
-GT PLATING OPTION NOT AVAILABLE ON SC-1S1-XX, SC-1P3-XX, OR EZ-1S1-XX,
 4. -GG PLATING OPTION AVAILABLE TO EXISTING CUSTOMERS ONLY ON EZ-2P3-XX.
-GT PLATING OPTION AVAILABLE TO EXISTING CUSTOMERS ONLY ON SC-2P3-XX AND EZ-2P3-XX.

TABLE 1 (* : CUT TO LENGTH IN FIG 1)
(*** = EXISTING CUSTOMERS ONLY)

SERIES	POSITION	ICA	ICA-H	ICO
-3	06	N/R	N/R	N/R
	08	SBOA-308	ICA-308-V	SBO-308
	10	N/R	N/R	N/R
	12	N/R	N/R	N/R
	14	SBOA-314	ICA-314-V	SBO-314
	16	SBOA-316	ICA-316-V	SBO-316
	18	SBOA-318	ICA-318-V	SBO-318
	20	SBOA-320	ICA-320-V	SBO-320
	22	SBOA-324*	ICA-322-V	SBO-324*
	24	SBOA-324	ICA-324-V	SBO-324
***28	ICA-328-V	ICA-328-V	N/R	
-4	22	SBOA-422	N/R	SBO-422
	24	N/R	N/R	N/R
-6	10	N/R	N/R	N/R
	14	N/R	N/R	N/R
	16	N/R	N/R	N/R
	18	N/R	N/R	N/R
	20	N/R	N/R	N/R
	22	N/R	N/R	N/R
	24	SBOA-624	ICA-624-V	SBO-624
	28	SBOA-628	ICA-628-V	SBO-628
	32	SBOA-632	ICA-632-V	SBO-632
	40	SBOA-640	ICA-640-V	SBO-640
48	SBOA-648	ICA-648-V	SBO-648	
-9	14	N/R	N/R	N/R
	24	N/R	N/R	N/R
	28	N/R	N/R	N/R
	32	N/R	N/R	N/R
	40	N/R	N/R	N/R
	48	N/R	N/R	N/R
	50	N/R	N/R	N/R
	64	N/R	N/R	N/R

*** PROPRIETARY NOTE ***
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND ALL DESIGN, MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC, INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR REPRODUCED, TRANSMITTED OR INCORPORATED IN ANY OTHER PRODUCT IN ANY MANNER WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMTEC, INC.

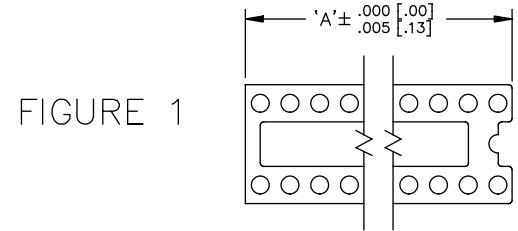


FIGURE 1

REF. PART No.	'A'
ICA-322-XXX	1.100 [27.94]
ICO-322-XXX	1.100 [27.94]

MATERIAL:
INSULATOR:
BLACK G.F. POLYESTER
UL RATED 94V-0
SOCKET:
CONTACT: 1/4 HARD BeCu
SHELL: 1/2 HARD BRASS



520 PARK EAST BLVD. NEW ALBANY, INDIANA 47150
PHONE (812) 944-6733 P.O. BOX 1147
CODE 55322

MADE BY: JORDAN 10-29-86
CHECKED BY: FARNSELY 11-10-86

ENG. APPROVAL

ICX-XXX-XXXX-X
SHEET 1 OF 2

EXISPROD\ASSEMBLY\DIP
ICX-ASM1