



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





## Description

VPP1101PNG is a highly integrated DisplayPort receiver, capable to support 1/2/4 lanes of DisplayPort input at Reduced or High Bit Rate, and compliant to DisplayPort V1.1a Standard. VPP1101PNG outputs, in LVTTTL, can be configured either in single or dual bus mode to support display format up-to WQXGA (2560x1600-60RB) at 6/8/10-bit color depth. VPP1101 also supports the second stream for audio path at up to 192KHz sample rate of 30-bit per data in S/PDIF or I2S format.

## Features


- ◆ Standards compliance: DisplayPort 1.1a, HDCP v1.3, and EDID v1.4
- ◆ Supports 1/2/4 main link lanes from the source for data rates of 1.62Gbps (RBR) and 2.7Gbps (HBR)
- ◆ Adaptive receiver equalization to compensate for PCB, cable, or connector signal loss up to 15db
- ◆ Built-in PRBS7 test pattern generation
- ◆ AC coupled for low voltage chipset operation
- ◆ Supports integration into LCD panels for direct drive displays
- ◆ High speed bi-directional auxiliary channel (AUX CH) capable of I2C mapping over AUX CH between the source and the VPP1101PNG
- ◆ Dual I2Cs or I2C+SPI
- ◆ Supported output resolution
  - Monitor panel: Up to 2560x1600 @60Hz reduced-blanking mode
  - TV panel: Up to FullHD 1920x1080p @120Hz
- ◆ Supports up to 24 bits per pixel at 1080p @120Hz
- ◆ Faithfully recover the data stream based on Attribute Packet
- ◆ Capable to support DisplayPort compliant cable up-to 30-meter
- ◆ Supports a minimum of 1080p at 24bpp 50/60Hz over 4 lane at 30-meter cable
- ◆ Video input options
  - Input pixel data depth 6/8/10/12 bits
  - Input pixel format supports RGB444
- ◆ Video output options
  - Single or dual-port LVTTTL data output
  - Compatible with VESA panel interface standards
  - Selectable rising/falling edge data sample
  - Support 6/8/10-bit color depth output
  - Supports output pixel formats RGB444 18/24/30 bits, YCbCr444 18/24/30 bits, YCbCr422 12/16/20 bits, and YCbCr422 ITU-R BT.656 6/8/10 bits

- ◆ Digital audio interface supports high-end and low-end audio system
  - S/PDIF output supports PCM, Dolby Digital, DTS digital audio transmission (up to 192 kHz Fs) compliant to IEC 60958 and IEC 61937
  - One I2S output for connection to external low-cost audio DAC up to 192kHz
  - Error correction
  - Audio mute
- ◆ Built-in OTP, or external EEPROM, or SPI ROM
- ◆ Provides exceptional Secured Content Protection with HDCP 1.3 for digital content for video and audio streams.
- ◆ Advanced design for test (DFT) for added reliability
  - High-speed loop-back testing
  - At speed production testing
- ◆ 128L LQFP or 132L QFN 10x10x0.85mm package
- ◆ RoHS compliant green package

## Applications

- ◆ DTV with DisplayPort input
- ◆ Projector with DisplayPort input
- ◆ Direct Drive PC Monitor or TV Monitor with DisplayPort input

## Block Diagram

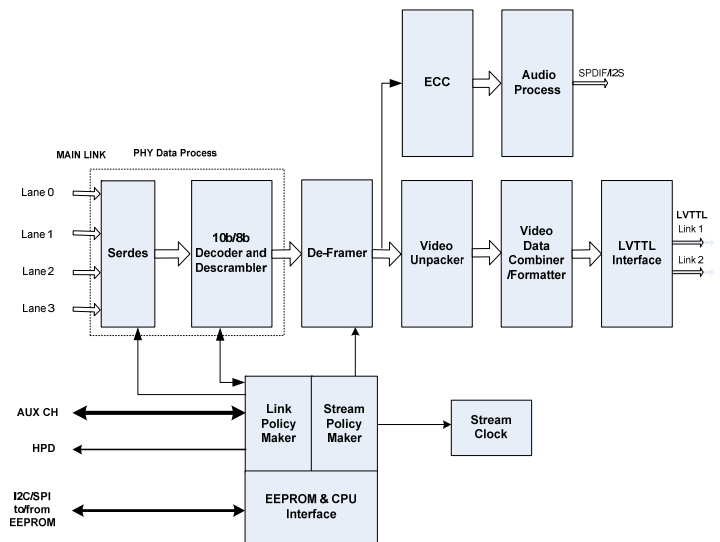

**CORPORATE HEADQUARTERS**  
6024 Silver Creek Valley Road  
San Jose, CA 95138

**for SALES:**  
800-345-7015 or 408-284-8200  
fax: 408-284-2775  
[www.idt.com](http://www.idt.com)

**for TECH SUPPORT:**  
email: [videohelp@idt.com](mailto:videohelp@idt.com)

IDT and the IDT logo are registered trademarks of Integrated Device Technology, Inc.