



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Type 12 Mild Steel Modular Freestanding Disconnect Enclosure

IME Series

Hinge Door with Handle (Flange w/ multi-vendor cutout)

Note: This product line has been discontinued as a stocked series. Information is for reference only. For alternative solution assistance, please contact Hammond Customer Service - sales@hammfg.com or USA (716) 630-7030, Canada and International (519) 822-2960.



Application

- The IFMD product line provides users with a rugged housing for industrial control and operator interface in harsh industrial environments.
- Modular design permits joining of units for large scale and mixed use applications.
- A broad range of industry standard sizes are offered. Units are constructed to imperial dimensions and hardware sizes, with metric sizing provided for convenient reference.
- IME Series enclosures are used as slave units to IFMD Disconnect Series. The flange mount disconnect units accommodate today's most popular disconnect hardware.
 - ABB Controls Disconnect Switches up to (and including) 200 amp, also operators for ABB circuit breakers up to 800 amp.
 - Allen Bradley 1494V variable depth flange mounted disconnect up to and including 200 amp and operators for C-H Westinghouse circuit breakers up to 400 amp.
 - C-H Westinghouse C361 flange mounted disconnect switches up to and including 200 amp and C371 circuit breakers up to 600 amp, also Flex Shaft handle mechanisms for circuit breakers.
 - General Electric Type STDA flange mounted variable depth flange operators for disconnect switches up to and including 200 amp and circuit breakers up to 600 amp or Spectra Flex™ cable operators for circuit breakers.
 - I-T-E Siemens Max-Flex™ flange mounted variable depth cable operators for disconnect switches up to 200 amp and circuit breakers up to 600 amp.
 - Square D class 9422 variable depth flange mounted operating mechanisms for disconnect switches up to and including 200 amp or cable mechanism for 30, 60 or 100 amp, also circuit breakers with variable depth operators or cable mechanism up to 400 amp.

Standards

- UL 508 Type 12
- CSA Type 12
- Complies with
 - NEMA Type 12
 - IEC 60529 IP54



- Appropriate components are required to maintain these standards.

Standard Configuration

- Frame with integral solid top
- Lifting eyebolts
- Removable bottom panel
- Solid front door with key locking handle
- Disconnect to door handle activation hardware
- Hinged flange door
- Removable rear cover panel
- Inner mounting panel, additional panels available

Construction


- Formed 14 gauge steel.
- Frame has welded corner reinforcements.
- Mounting channels on sides of enclosure are oriented front to back for depth adjustment of mounting panels.
- Oil resistant gaskets are permanently secured on all openings.
- Reinforced eyebolts are provided for easy enclosure lifting.
- Frames are easily joined together with an optional frame Joining kit.
- Doors can be easily removed and interchanged.
- Optional formed 16 gauge steel side panels are recessed to fit flush with the sides of the cabinet. Side panels must be ordered separately.
- Bonding and grounding studs are provided for all doors and panels.

Finish

- Phosphatized and finished in RAL 7032 beige powder coating.
- Inner panels are finished in white powder coating.

Accessories

- Additional Inner Panels
- Bridge Panel
- Caster Assembly - Inside Mounting
- IME Door Shelf
- Fold Down Shelf
- Leveling Feet
- Literature Pocket
- 10-32 Tapped Combination Mounting Rail
- Outlet Strips
- Side Panels
- Cooling Products
- Caster Assembly - Outside Mounting
- Door Mount Rails
- Door Support Wheel
- Joining Kit
- Lighting
- Interlock Hardware
- Plinth
- Side Mount Inner Panels
- Vented Raised Top

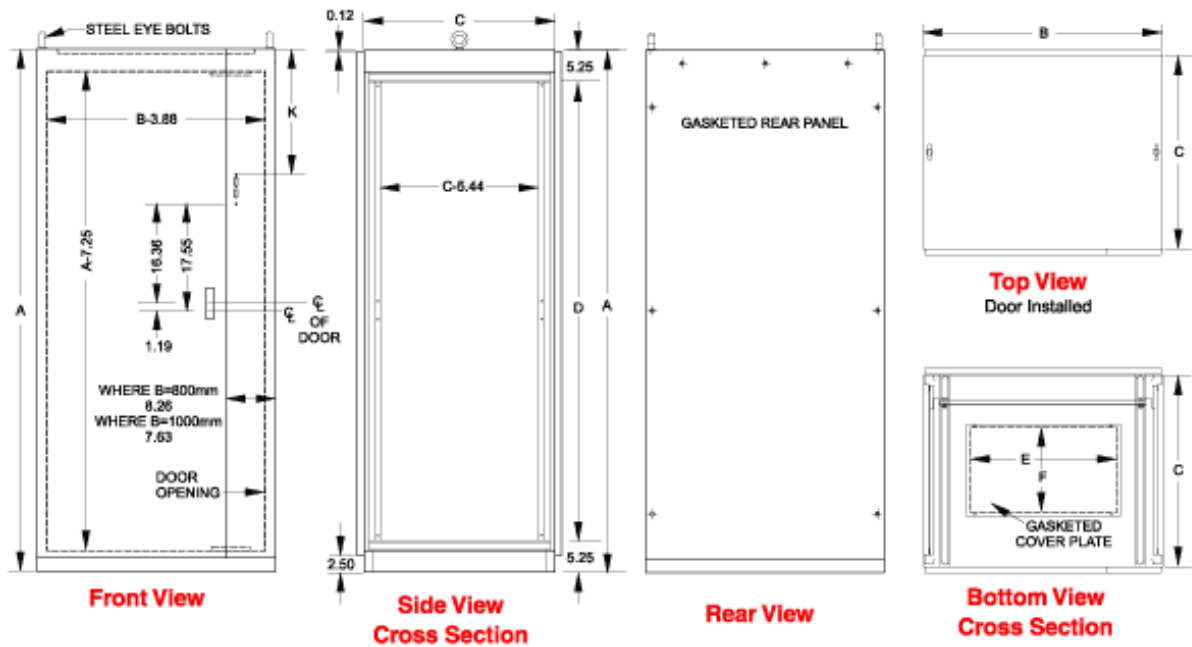

*Note: K= 16.42 when A=77.31
 K= 20.80 when A=86.06

Cabinet Depth (mm)	Without Bridge Panel (inch)	With Bridge Panel (inch)
400	14.63	13.88
500	18.5	17.75
600	22.5	21.75
800	30.38	29.63

Part No.	Nominal Dimensions A x B x C (mm)	Overall Dimensions						Panel Dimensions		Ship Wt. lbs
		A	B	C	D	E	F	Height	Width	
IFMD1885	1800 x 800 x 500	77.31	31.50	19.63	66.81	17.00	10.50	68.75	26.25	295
IFMD1886	1800 x 800 x 600	77.31	31.50	23.63	66.81	17.00	10.50	68.75	26.25	300
IFMD1888	1800 x 800 x 800	77.31	31.50	31.50	66.81	17.00	17.50	68.75	26.25	320
IFMD18105	1800 x 1000 x 500	77.31	39.37	19.63	66.81	24.06	10.50	68.75	34.12	345
IFMD18106	1800 x 1000 x 600	77.31	39.37	23.63	66.81	24.06	10.50	68.75	34.12	350
IFMD18108	1800 x 1000 x 800	77.31	39.37	31.50	66.81	24.06	17.50	68.75	34.12	360
IFMD2085	2000 x 800 x 500	86.06	31.50	19.63	75.56	17.00	10.50	77.50	26.25	310
IFMD2086	2000 x 800 x 600	86.06	31.50	23.63	75.56	17.00	10.50	77.50	26.25	320
IFMD2088	2000 x 800 x 800	86.06	31.50	31.50	75.56	17.00	17.50	77.50	26.25	340
IFMD20105	2000 x 1000 x 500	86.06	39.37	19.63	75.56	24.06	10.50	77.50	34.12	375
IFMD20106	2000 x 1000 x 600	86.06	39.37	23.63	75.56	24.06	10.50	77.50	34.12	385
IFMD20108	2000 x 1000 x 800	86.06	39.37	31.50	75.56	24.06	17.50	77.50	34.12	390

Data subject to change without notice

