



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## 150W, 100A Non-isolated SMT Point of Load with PMBus™

### Features

- ◆ Only 1.5 in<sup>2</sup> Board Space
- ◆ PMBus Compliant (Read & Write)
- ◆ Surface Mountable
- ◆ Digital Adaptive Control
- ◆ Parallel Operation with Current Sharing
- ◆ Configurable Sequence & Fault Management



### Key Market Segments & Applications



Specifications		
Model		iJC
DC Output Voltage	V	0.6 - 1.5V
DC Output Power (max)	W	150W
DC Input Voltage	V	8 - 14V
Efficiency	%	86.5 - 91.5%
Output Voltage Tolerance	%	±1.5%
Line Regulation	mV	8 (Typical)
Load Regulation	mV	8 (Typical)
External Load Capacitance	uF	1000 - 5000
Output Ripple and Noise	mVpp	15
Overcurrent Protection	A	>105A
Remote On / Off	-	Negative Logic or Positive Logic (See model selector)
Remote Sense	-	Yes
Operating Temperature	°C	-40 to 120 (see thermal data on website)
Storage Temperature	°C	-55 to 125
Safety Agency Certifications	-	IEC/EN/UL/CSA 60950-1, CE Mark
Weight	g / oz	20g / 0.7 oz
Size (LxWxH)	mm / in.	28.0 x 35.0 x 10.0mm / 1.10 x 1.37 x 0.39"
Warranty	yrs	3 years

PRELIMINARY



## Model Selector



Model	Input Voltage (V)	Output Current (A)	Output Voltage (V)	Remote On/Off
iJC12100A006V-002-R	8 - 14	100	0.6 - 1.5	Positive
iJC12100A006V-003-R	8 - 14	100	0.6 - 1.5	Negative

Preferred


## Pinout

PIN	Function	PIN	Function	PIN	Function	PIN	Function
1	Power Ground (0V)	11	Signal Ground (0V)	21	+V Output	31	PMBus Clock
2	Power Ground (0V)	12	Not Connected	22	+V Output	32	PMBus Data
3	+V Input	13	Output Trim	23	+V Output	33	PMBus Alert / Fault
4	+V Input	14	PMBus Address	24	Power Ground (0V)	34	Remote On/Off
5	Power Ground (0V)	15	Not Connected	25	Power Ground (0V)	35	Fault Mgmt
6	Power Ground (0V)	16	Set Parallel Operation (PSET)	26	+V Output	36	Power Good
7	+V Input	17	+ Remote Sense	27	+V Output	37	Current Share
8	+V Input	18	- Remote Sense	28	+V Output	38	Synchronize
9	Power Ground (0V)	19	Power Ground (0V)	29	Power Ground (0V)		
10	Power Ground (0V)	20	Power Ground (0V)	30	Power Ground (0V)		

## Outline Drawings

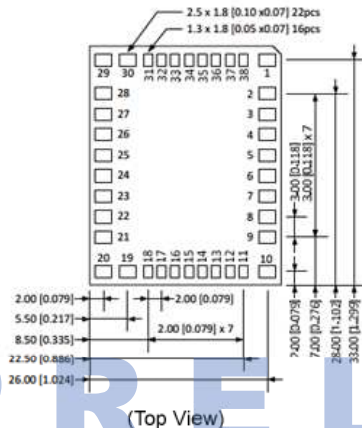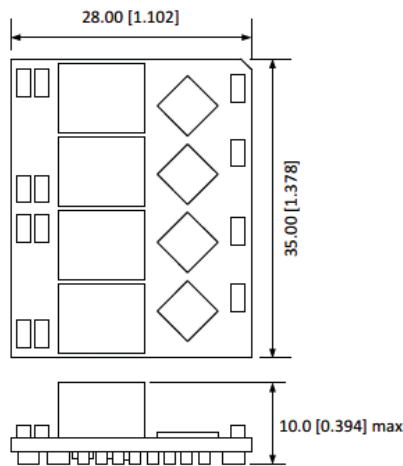

## Typical Application Circuit

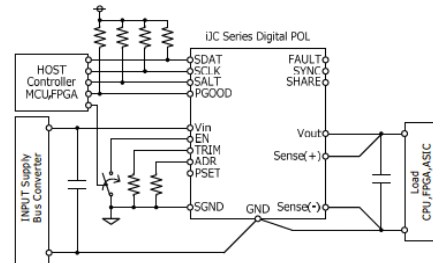

## Evaluation Board

Evaluation kit part #	Contents
iJC100A-003-EVKIT-S1	Evaluation board with one piece of iJC12100A006V-003-R PMBus Dongle Board & USB cable CD ROM User manual available at iJx series technical file in our website

## Other Industrial Products

CC-E	1.5 - 30W 5, 12, 24 or 48V input isolated DC-DC converters
PX	10 - 60W 12, 24 or 48V input isolated DC-DC converters
iJA, iJB, iJC	35 - 100A non isolated DC-DC converters with PMBus
iAF, iBF, iCF, iCG	3 - 20A DOSA2 non isolated DC-DC converters
iQE, iQL, iQG	96 - 400W Quarter bricks
iEH	300W Eighth brick

For Additional Information, please visit [us.tdk-lambda.com/lp/products/ijb-series.htm](http://us.tdk-lambda.com/lp/products/ijb-series.htm)

