



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





ILLSU series

Submersible Tank Gauging Level Transmitter



- Piezo-resistive sensor
- Stainless steel housing and diaphragm
- Accuracy <0.5% FS BFSL
- Various outputs including Volts and mA.
- Depth ranges from 0-48" (0-4ft) to 0-480" (0-40ft) WG

Options available on the ILLSU transmitter.

Pressure range
Voltage or current output
Cable length

Suitable applications

Static tank level
Container or chamber level
Vehicle tank level
IBC, IBC Tote or Pallet Tank
Rainwater harvesting

Performance

Accuracy (Non-Linearity & Hysteresis)	<±0.5% / FS (BFSL)	
Setting Errors (offsets)	2-wire	Zero & Full Scale, <±0.5% / FS
	3-wire	Zero & Full Scale, <±0.5% / FS
Permissible Load	2-wire	$R_{max} = [(Supply-9min)/0.02]\Omega$
	3-wire	$R_{min} = 10k\Omega$
Influence Effects	Supply	<0.005% FS / 1V
	Load	0.05% FSO / kΩ

The ILLSU is designed for use in continuous submersion in liquids such as water, oils and fuels in small tanks, where conventional mechanical level switches and sensors are not ideal and more level 'control' and measurement is required.

The probe uses a piezo-resistive silicon sensing technology, isolated from the media by a diaphragm within the stainless steel housing. It offers excellent stability, repeatability and resolution for applications where a small tank level is required, from as low as 3ft through to 40 ft high tanks.

Each device is temperature compensated, calibrated and supplied with a traceable serial number and calibration certificate.

Custom versions can be made for particular applications.

Electrical Protection

Supply reverse polarity No damage/no function
Electromagnetic compatibility CE Compliant

Mechanical Stability

Shock 100g / 11s
Vibration 10g RMS (20 - 2000Hz)

Temperatures & Thermal Effects

Media Temperature -20°C (Non-freezing) to +60°C
Storage temperature -20°C to +70°C
Compensated temperature range 20°C±25°C
Thermal Zero Shift (TZS) <±0.04% /FS/°C
Thermal Span Shift (TSS) <±0.015% /°C

Material Specifications

Housing 303 Stainless Steel
"O" ring seals Viton
Diaphragm 316L Stainless Steel
Cable sheath material FEP standard
Media wetted parts Housing, "O" ring seal, diaphragm, cable sheath
Weight Transmitter: approx 2.65oz (75g)
Cable: 1.7oz (48g) per yard
Installation position Any, small zero shift when tilted through 90°
Operational life > 100x 10⁶ cycles
Insulation resistance 50MΩ@50Vdc

Cynergy3 Components Ltd.
7 Cobham Road
Ferndown Industrial Estate
Wimborne, Dorset BH21 7PE
Telephone +44 (0) 1202 897969
Email:sales@cynergy3.com

ISO9001 CERTIFIED

www.cynergy3.com



ILLSU series

Submersible Tank Gauging Level Transmitter

Pressure Ranges and Passive mV/V Outputs

Nominal Pressure, Gauge	inchWG	40	100	200	280	400
Permissible Overpressure	inchWG	800	800	800	2000	2000


Output Signals and Supply Voltages

Wire system Output	Supply Voltage	Connection	Wire Colours
2-wire 4-20mA	9-32Vdc	+ve Supply	Brown
		-ve Supply	White
		Ground	Pink
		Cable Screen	Green
3-wire 0.5-4.5Vdc non-ratiometric	9-32Vdc	+ve Supply	Brown
		-ve Supply	White
		+ve Output	Yellow
		Ground	Pink
		Cable Screen	Green

Care must be taken regarding screening and earthing when using voltage output

Part No	Pressure Range	Cable Length	Output
ILLSU-Gi048-5-003	0-48" WG	10ft	4-20mA
ILLSU-Gi120-5-005	0-120" WG	16ft	4-20mA
ILLSU-Gi240-5-008	0-240" WG	26ft	4-20mA
ILLSU-Gi360-5-012	0-360" WG	40ft	4-20mA
ILLSU-Gi480-5-016	0-480" WG	52ft	4-20mA
ILLSU-Gi048-D-003	0-48" WG	10ft	0.5 to 4.5V 3Wire
ILLSU-Gi120-D-005	0-120" WG	16ft	0.5 to 4.5V 3Wire
ILLSU-Gi240-D-008	0-240" WG	26ft	0.5 to 4.5V 3Wire
ILLSU-Gi360-D-012	0-360" WG	40ft	0.5 to 4.5V 3Wire
ILLSU-Gi480-D-016	0-480" WG	52ft	0.5 to 4.5V 3Wire

(Custom ranges and outputs available on request)

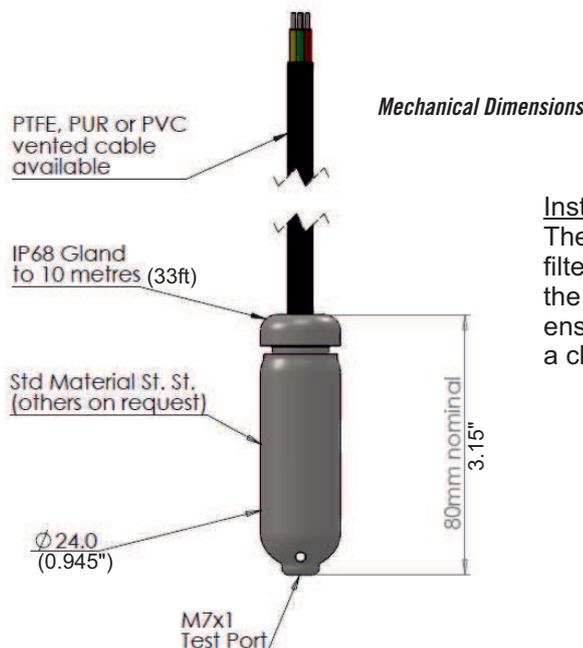

Installation Note.

The vented cable is fitted with a filter (shown below) to prevent the entry of moisture. If removed, ensure vent tube is positioned in a clean, dry area.

