



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



HIGH QUALITY SOUND

In order to meet requirements for high performance, we've sourced high quality copper for the conductors and PE for the insulation. This ensures the cable will perform to exacting standards.

Our Performance Series was made for those looking for durability in a budget friendly package.

FLEXIBLE PVC JACKET

The Performance series comes complete with a matte PVC jacket that protects the interior workings of the cable from the harsh environment. It also helps the cable keep its shape for a perfect coil every time.

RUGGED CONNECTORS

Our sleek, black connectors feature an extremely durable zinc die cast shell, which can withstand the rigors of any musical environment. They also come complete with a rubber boot for just the right amount of strain relief.

GREAT EMI RESISTANCE

Inside, this 2 conductor cable features a spiral shield which provides up to 95% coverage. The result is less Electromagnetic Interference to maintain the purest quality signal possible.




Part Number	IO-XLR3-3-E	IO-XLR3-6-E	IO-XLR3-10-E	IO-XLR3-25-E	IO-XLR3-50-E	IO-XLR3-100-E
Length*	3 Ft 0.9m	6 Ft 1.8m	10 Ft 3m	25 Ft 7.6m	50 Ft 15m	100 Ft 30.5m
AWG	24AWG	24AWG	24AWG	24AWG	24AWG	24AWG
Jacket Color	Black	Black	Black	Black	Black	Black

*Custom Lengths available upon request

Product specifications may change without prior notification

Configuration



Product

Part Number IO-XLR3-XX-E
 Number of Conductors 2 plus shield

Conductors

Details 20/0.12
 Size 24 AWG

Insulation

Material PE
 Colors Red and White

Shield

Spiraled 60/0.12

Jacket

O.D. 6.0mm
 Material PVC
 Color Black

Electrical and Mechanical Characteristics

Conductor DC Resistance (ohm/m)	0.075 +/- 5%
Shield DC Resistance (ohm/m)	0.025
Voltage Breakdown	300V
Flex Life	> 17,700
Tensile Strength	> 656.2N
Applicable Temperature	-20°C ~ +60°C (-4°F ~ +140°F)
Peak Temperature	-40°C ~ +70°C (-40°F ~ +158°F)


PART NUMBER BREAKDOWN:

IO-XLR3-XX-E
 Type of cable

IO-XLR3-XX-E
 Number of pins

IO-XLR3-XX-E
 Length of the cable in feet

IO-XLR3-XX-E
 Series identifier

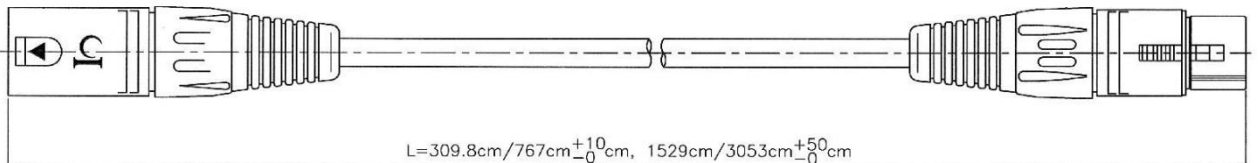

Product specifications may change without prior notification