



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China


## IR2106(4)(S) & (PbF)

### HIGH AND LOW SIDE DRIVER

#### Features

- Floating channel designed for bootstrap operation  
Fully operational to +600V  
Tolerant to negative transient voltage  
 $dV/dt$  immune
- Gate drive supply range from 10 to 20V (IR2106(4))
- Undervoltage lockout for both channels
- 3.3V, 5V and 15V input logic compatible
- Matched propagation delay for both channels
- Logic and power ground +/- 5V offset.
- Lower  $dI/dt$  gate driver for better noise immunity
- Outputs in phase with inputs (IR2106)
- Also available LEAD-FREE

#### Packages

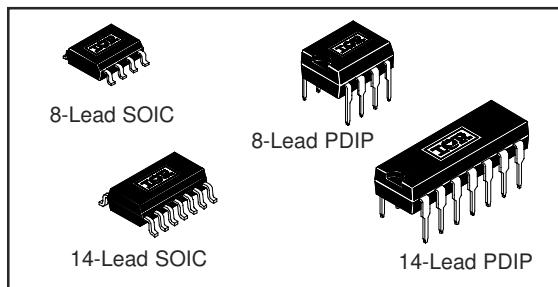


#### Description

The IR2106(4)(S) are high voltage, high speed power MOSFET and IGBT drivers with independent high and low side referenced output channels. Proprietary HVIC and latch immune CMOS technologies enable ruggedized monolithic construction. The logic input is compatible with standard CMOS or LSTTL output, down to 3.3V logic. The output drivers feature a high pulse current buffer stage designed for minimum driver cross-conduction. The floating channel can be used to drive an N-channel power MOSFET or IGBT in the high side configuration which operates up to 600 volts.

#### 2106/2301//2108//2109/2302/2304 Feature Comparison

Part	Input logic	Cross-conduction prevention logic	Dead-Time	Ground Pins	Ton/Toff
2106/2301	HIN/LIN	no	none	COM	220/200
21064				VSS/COM	
2108	HIN/ <u>LIN</u>	yes	Internal 540ns	COM	220/200
21084			Programmable 0.54~5μs	VSS/COM	
2109/2302	IN/SD	yes	Internal 540ns	COM	750/200
21094			Programmable 0.54~5μs	VSS/COM	
2304	HIN/LIN	yes	Internal 100ns	COM	160/140

#### Typical Connection

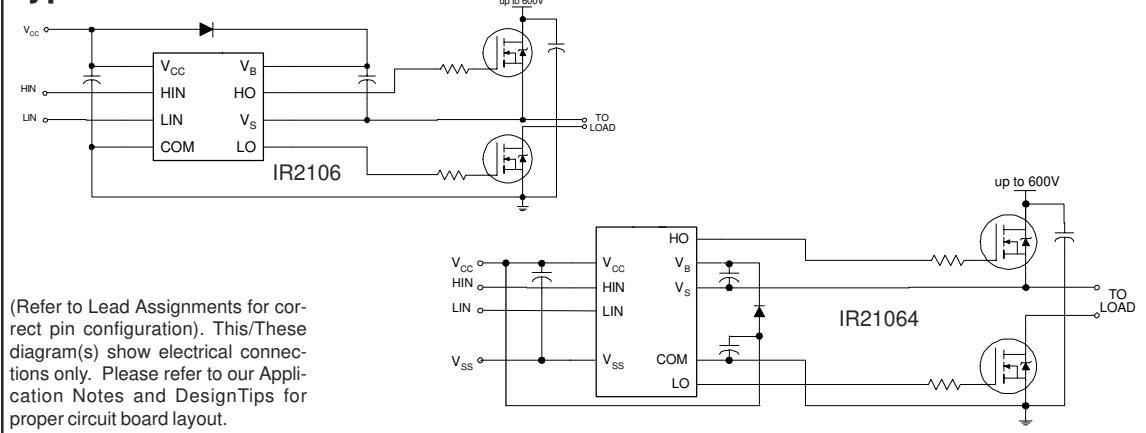

# IR2106(4)(S) & (PBF)

International  
**IR** Rectifier

## Absolute Maximum Ratings

Absolute maximum ratings indicate sustained limits beyond which damage to the device may occur. All voltage parameters are absolute voltages referenced to COM. The thermal resistance and power dissipation ratings are measured under board mounted and still air conditions.

Symbol	Definition	Min.	Max.	Units
$V_B$	High side floating absolute voltage	-0.3	625	V
$V_S$	High side floating supply offset voltage	$V_B - 25$	$V_B + 0.3$	
$V_{HO}$	High side floating output voltage	$V_S - 0.3$	$V_B + 0.3$	
$V_{CC}$	Low side and logic fixed supply voltage	-0.3	25	
$V_{LO}$	Low side output voltage	-0.3	$V_{CC} + 0.3$	
$V_{IN}$	Logic input voltage	$V_{SS} - 0.3$	$V_{CC} + 0.3$	
$V_{SS}$	Logic ground (IR21064 only)	$V_{CC} - 25$	$V_{CC} + 0.3$	
$dV_S/dt$	Allowable offset supply voltage transient	—	50	V/ns
$P_D$	Package power dissipation @ $T_A \leq +25^\circ\text{C}$	(8 lead PDIP)	—	1.0
		(8 lead SOIC)	—	0.625
		(14 lead PDIP)	—	1.6
		(14 lead SOIC)	—	1.0
$R_{thJA}$	Thermal resistance, junction to ambient	(8 lead PDIP)	—	125
		(8 lead SOIC)	—	200
		(14 lead PDIP)	—	75
		(14 lead SOIC)	—	120
$T_J$	Junction temperature	—	150	$^\circ\text{C}$
$T_S$	Storage temperature	-50	150	
$T_L$	Lead temperature (soldering, 10 seconds)	—	300	

## Recommended Operating Conditions

The Input/Output logic timing diagram is shown in figure 1. For proper operation the device should be used within the recommended conditions. The  $V_S$  and  $V_{SS}$  offset rating are tested with all supplies biased at 15V differential.

Symbol	Definition	Min.	Max.	Units
$V_B$	High side floating supply absolute voltage IR2106(4)	$V_S + 10$	$V_S + 20$	V
$V_S$	High side floating supply offset voltage	Note 1	600	
$V_{HO}$	High side floating output voltage	$V_S$	$V_B$	
$V_{CC}$	Low side and logic fixed supply voltage IR2106(4)	10	20	
$V_{LO}$	Low side output voltage	0	$V_{CC}$	
$V_{IN}$	Logic input voltage	$V_{SS}$	$V_{CC}$	
$V_{SS}$	Logic ground (IR21064 only)	-5	5	
$T_A$	Ambient temperature	-40	125	°C

Note 1: Logic operational for  $V_S$  of -5 to +600V. Logic state held for  $V_S$  of -5V to  $-V_B$ . (Please refer to the Design Tip DT97-3 for more details).

## Dynamic Electrical Characteristics

$V_{BIAS}$  ( $V_{CC}$ ,  $V_B$ ) = 15V,  $V_{SS}$  = COM,  $C_L$  = 1000 pF,  $T_A$  = 25°C.

Symbol	Definition	Min.	Typ.	Max.	Units	Test Conditions
$t_{on}$	Turn-on propagation delay	—	220	300	nsec	$V_S = 0V$
$t_{off}$	Turn-off propagation delay	—	200	280		$V_S = 0V$ or 600V
MT	Delay matching, HS & LS turn-on/off	—	0	30		
$t_r$	Turn-on rise time	—	150	220		$V_S = 0V$
$t_f$	Turn-off fall time	—	50	80		$V_S = 0V$

# IR2106(4)(S) & (PBF)



International  
**IR** Rectifier

## Static Electrical Characteristics

$V_{BIAS}$  ( $V_{CC}$ ,  $V_{BS}$ ) = 15V,  $V_{SS}$  = COM and  $T_A$  = 25°C unless otherwise specified. The  $V_{IL}$ ,  $V_{IH}$  and  $I_{IN}$  parameters are referenced to  $V_{SS}$ /COM and are applicable to the respective input leads. The  $V_O$ ,  $I_O$  and  $R_{on}$  parameters are referenced to COM and are applicable to the respective output leads: HO and LO.

Symbol	Definition	Min.	Typ.	Max.	Units	Test Conditions
$V_{IH}$	Logic “1” input voltage (IR2106(4))	2.9	—	—	V	$V_{CC} = 10V$ to 20V
$V_{IL}$	Logic “0” input voltage (IR2106(4))	—	—	0.8		$V_{CC} = 10V$ to 20V
$V_{OH}$	High level output voltage, $V_{BIAS} - V_O$	—	0.8	1.4		$I_O = 20$ mA
$V_{OL}$	Low level output voltage, $V_O$	—	0.3	0.6		$I_O = 20$ mA
$I_{LK}$	Offset supply leakage current	—	—	50		$V_B = V_S = 600$ V
$I_{QBS}$	Quiescent $V_{BS}$ supply current	20	75	130		$V_{IN} = 0V$ or 5V
$I_{QCC}$	Quiescent $V_{CC}$ supply current	60	120	180		$V_{IN} = 0V$ or 5V
$I_{IN+}$	Logic “1” input bias current $V_{IN} = 5V$ (IR2106(4))	—	5	20		
$I_{IN-}$	Logic “0” input bias current $V_{IN} = 0V$ (IR2106(4))	—	—	2		
$V_{CCUV+}$ $V_{BSUV+}$	$V_{CC}$ and $V_{BS}$ supply undervoltage positive going threshold	8.0	8.9	9.8	V	
$V_{CCUV-}$ $V_{BSUV-}$	$V_{CC}$ and $V_{BS}$ supply undervoltage negative going threshold	7.4	8.2	9.0		
$V_{CCUVH}$ $V_{BSUVH}$	Hysteresis	0.3	0.7	—		
$I_{O+}$	Output high short circuit pulsed current	120	200	—	mA	$V_O = 0V$ , $PW \leq 10$ $\mu$ s
$I_{O-}$	Output low short circuit pulsed current	250	350	—		$V_O = 15V$ , $PW \leq 10$ $\mu$ s

## Functional Block Diagrams

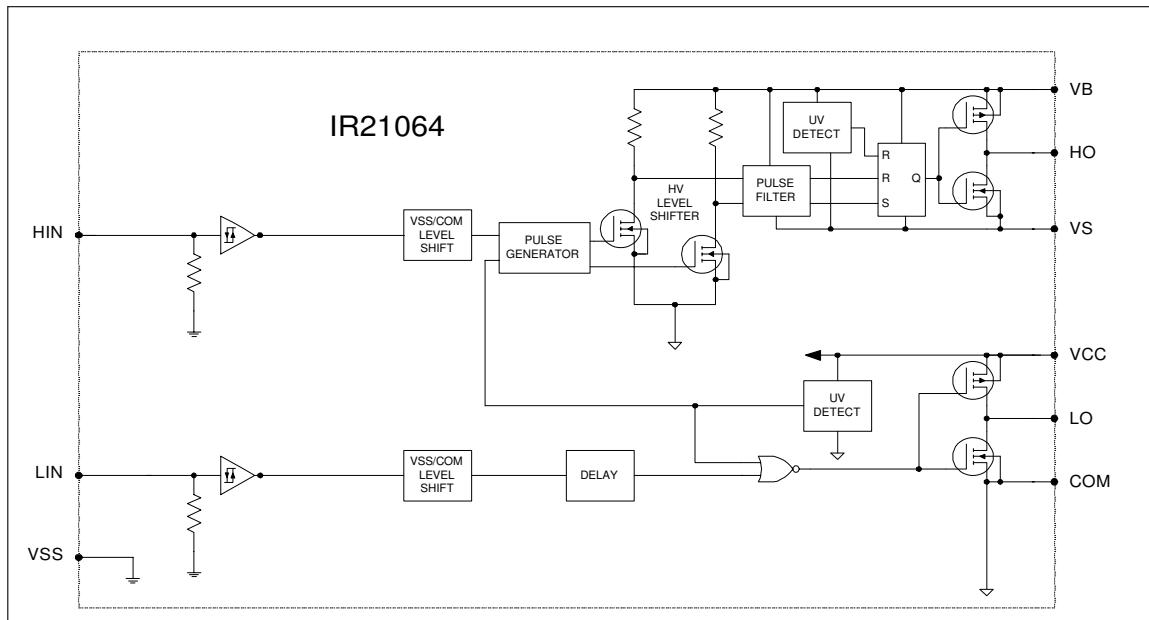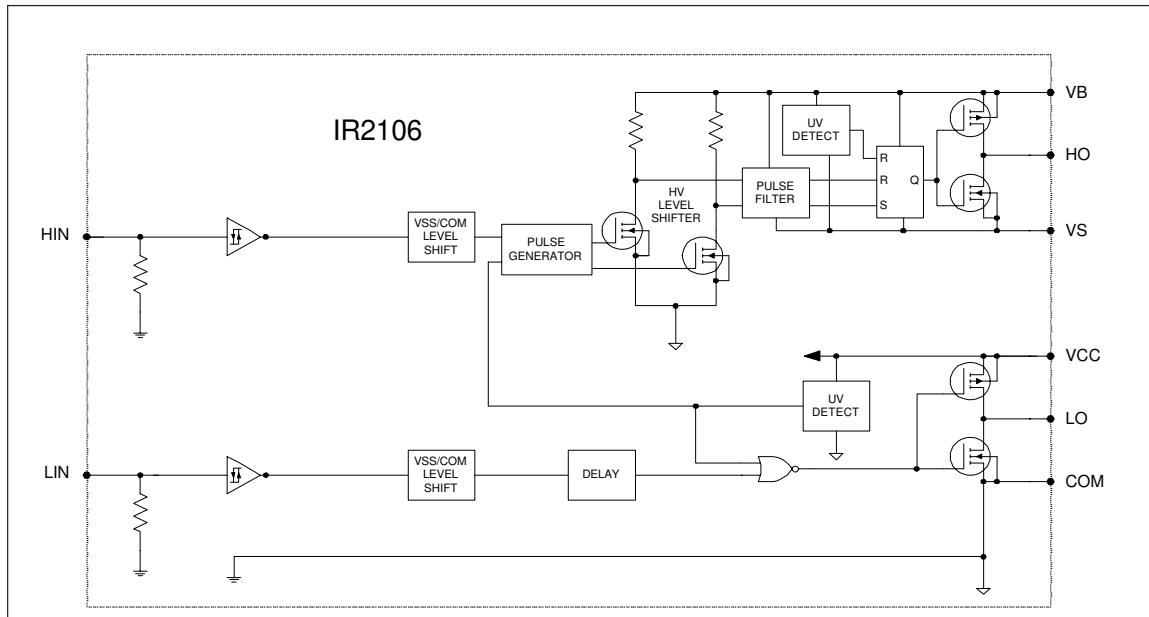



# IR2106(4)(S) & (PBF)



International  
**IR** Rectifier

## Lead Definitions

Symbol	Description
HIN	Logic input for high side gate driver output (HO), in phase
LIN	Logic input for low side gate driver output (LO), in phase
VSS	Logic Ground (IR21064 only)
V <sub>B</sub>	High side floating supply
HO	High side gate drive output
V <sub>S</sub>	High side floating supply return
V <sub>CC</sub>	Low side and logic fixed supply
LO	Low side gate drive output
COM	Low side return

## Lead Assignments

 <p>8 Lead PDIP</p>	 <p>8 Lead SOIC</p>
<b>IR2106</b>	<b>IR2106S</b>

 <p>14 Lead PDIP</p>	 <p>14 Lead SOIC</p>
<b>IR21064</b>	<b>IR21064S</b>

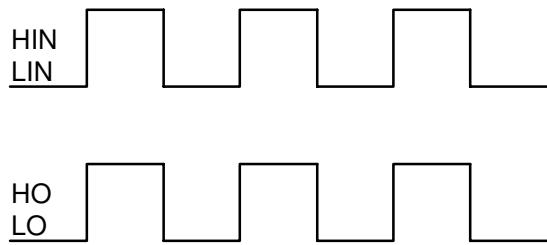


Figure 1. Input/Output Timing Diagram

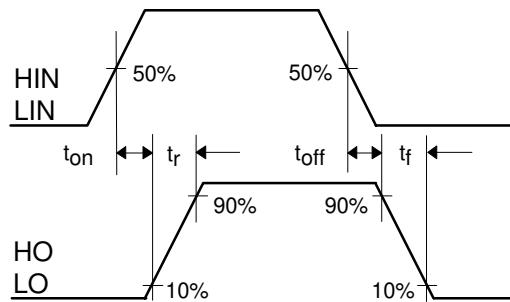


Figure 2. Switching Time Waveform Definitions

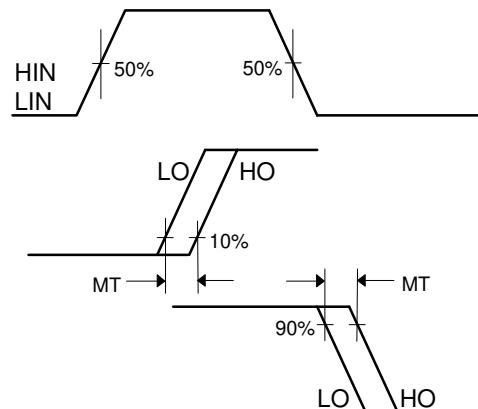


Figure 3. Delay Matching Waveform Definitions

# IR2106(4)(S) & (PBF)

International  
**IR** Rectifier

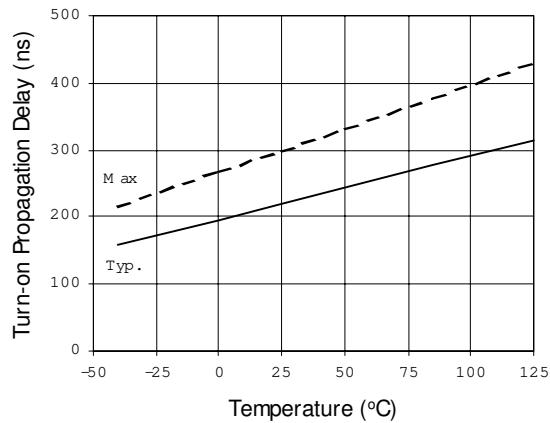


Figure 4A. Turn-on Propagation Delay vs. Temperature

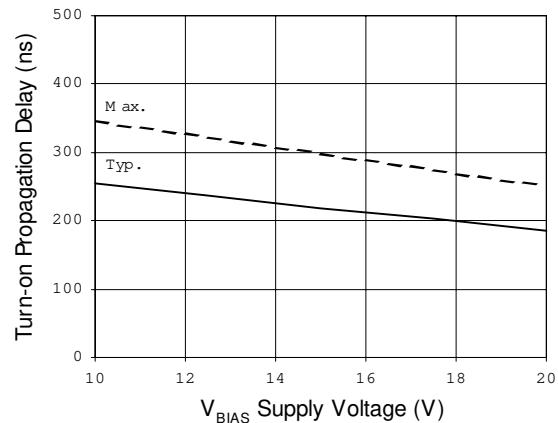


Figure 4B. Turn-on Propagation Delay vs. Supply Voltage

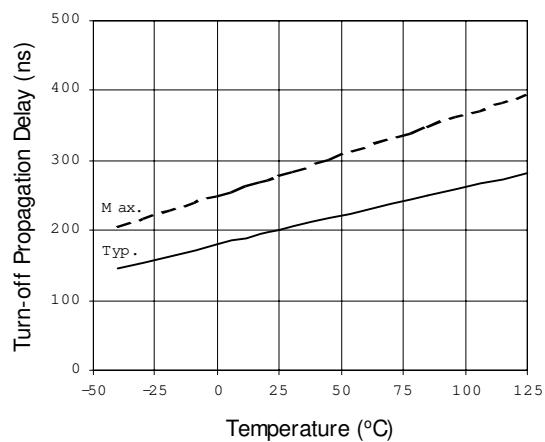


Figure 5A. Turn-off Propagation Delay vs. Temperature



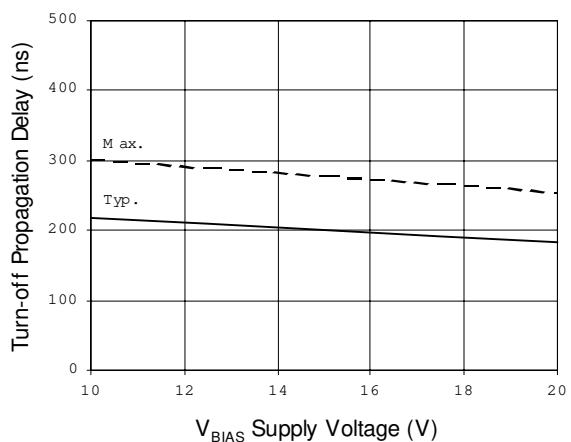



Figure 5B. Turn-off Propagation Delay vs. Supply Voltage

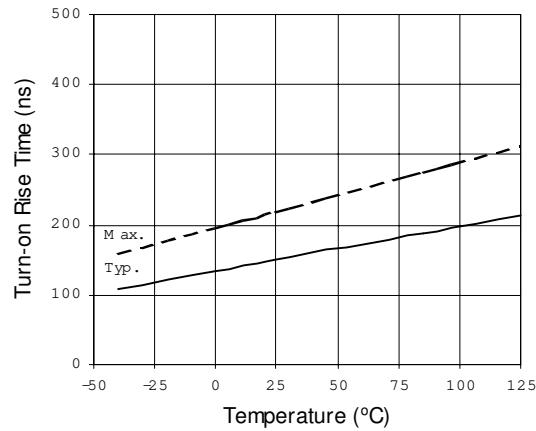


**Figure 6A. Turn-on Rise Time vs. Temperature**

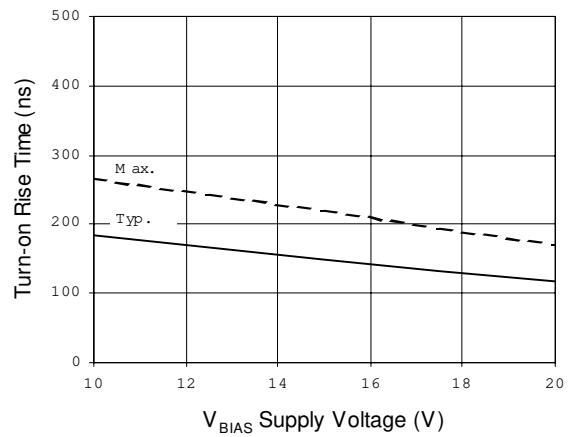

**Figure 6B. Turn-on Rise Time vs. Supply Voltage**

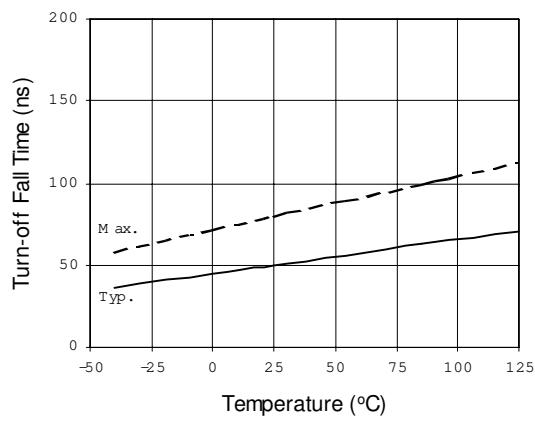

**Figure 7A. Turn-off Fall Time vs. Temperature**

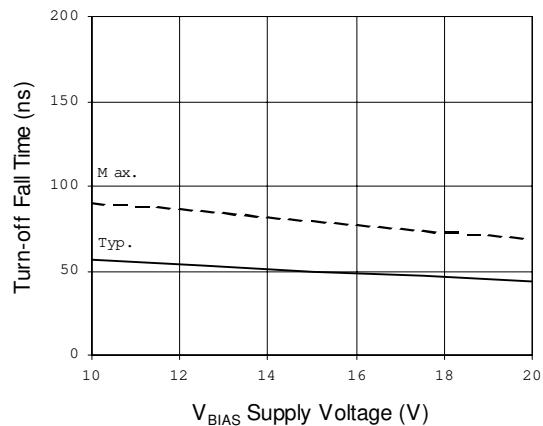

**Figure 7B. Turn-off Fall Time vs. Supply Voltage**

# IR2106(4)(S) & (PBF)

International  
**IR** Rectifier

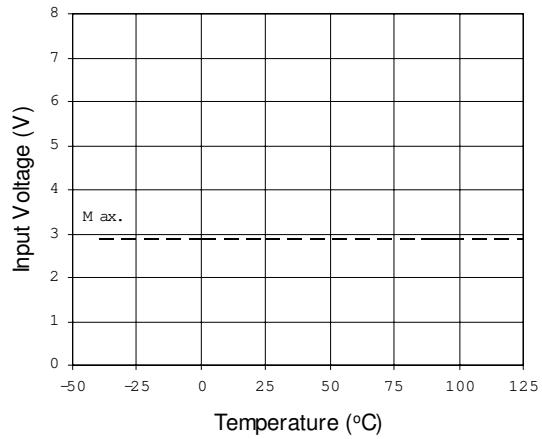


Figure 8A. Logic "1" Input Voltage  
vs. Temperature

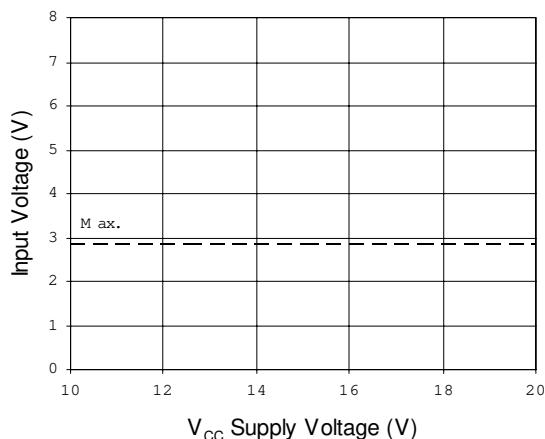


Figure 8B. Logic "1" Input Voltage  
vs. Supply Voltage

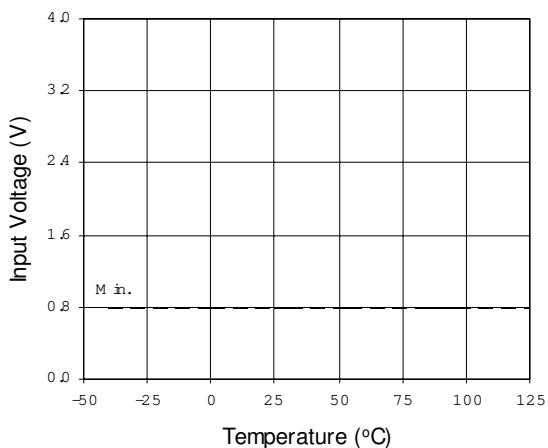


Figure 9A. Logic "0" Input Voltage  
vs. Temperature



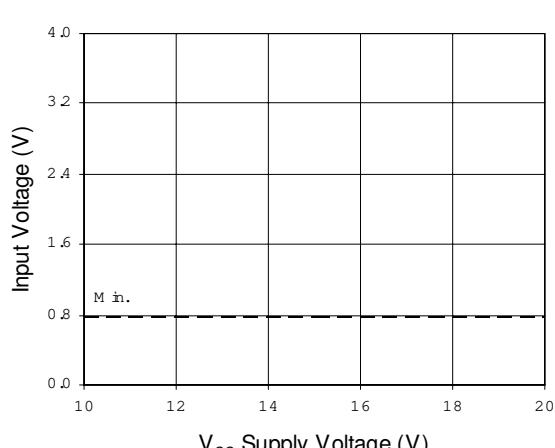



Figure 9B. Logic "0" Input Voltage  
vs. Supply Voltage

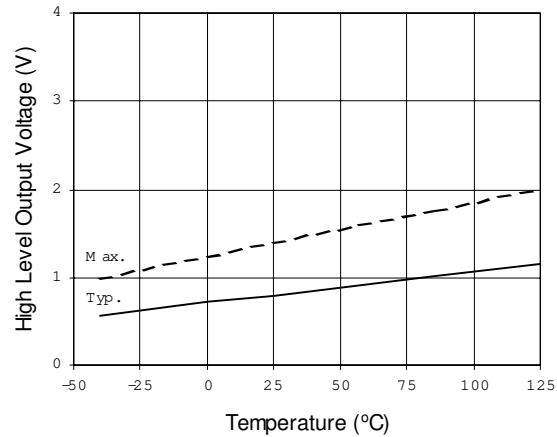


**Figure 10A. High Level Output Voltage vs. Temperature**

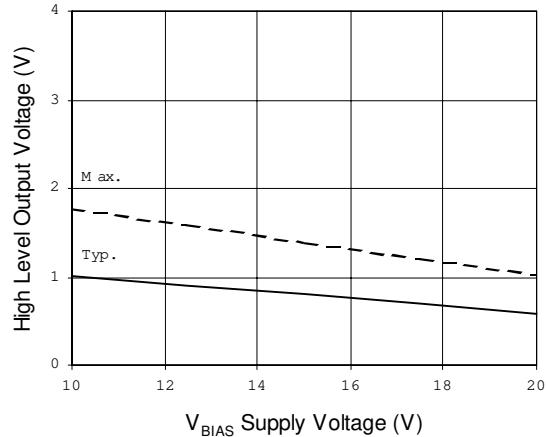

**Figure 10B. High Level Output Voltage vs. Supply Voltage**

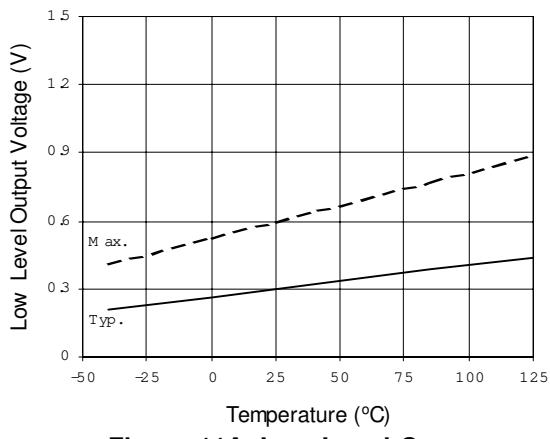

**Figure 11A. Low Level Output Voltage vs. Temperature**

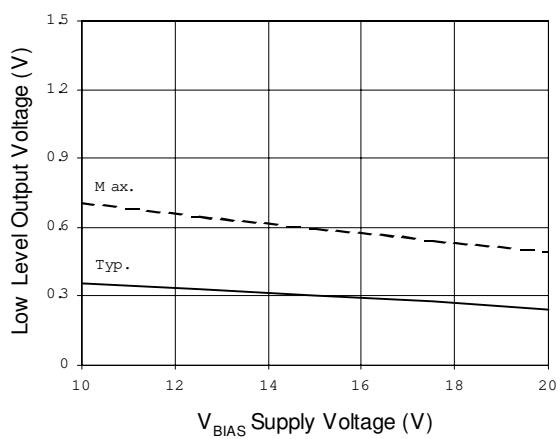

**Figure 11B. Low Level Output Voltage vs. Supply Voltage**

# IR2106(4)(S) & (PBF)

International  
**IR** Rectifier

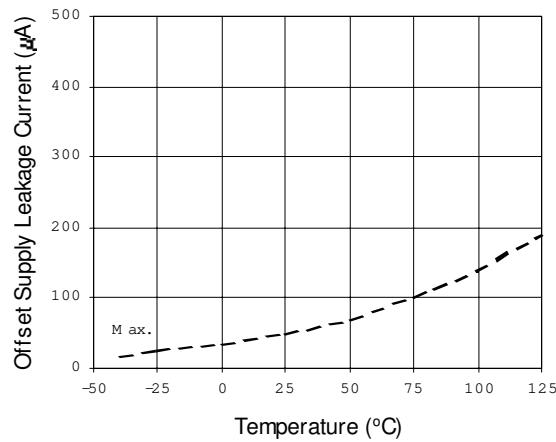


Figure 12A. Offset Supply Leakage Current vs. Temperature

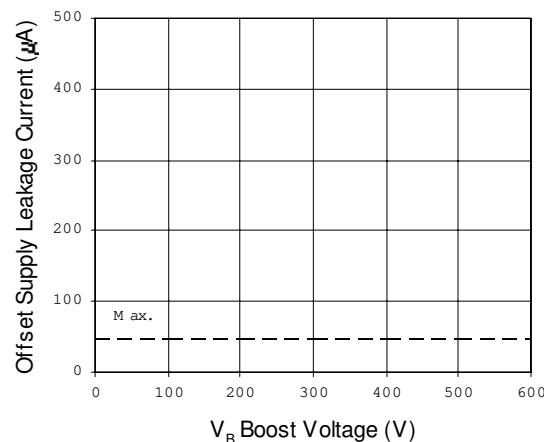


Figure 12B. Offset Supply Leakage Current vs. Supply Voltage

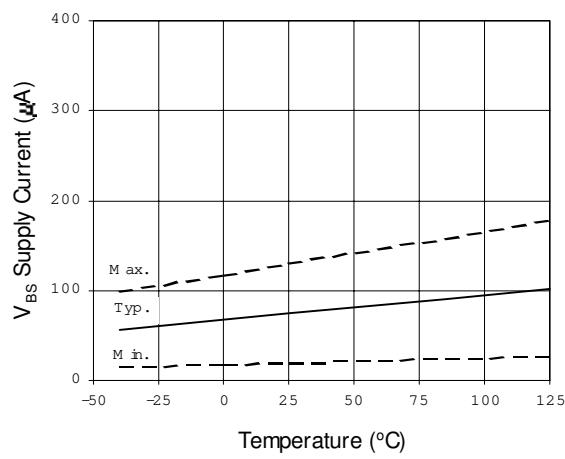


Figure 13A.  $V_{BS}$  Supply Current vs. Temperature

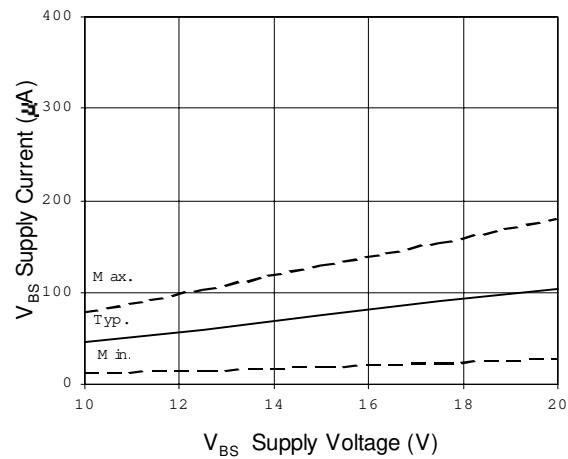


Figure 13B.  $V_{BS}$  Supply Current vs. Supply Voltage

## IR2106(4)(S & (PbF))

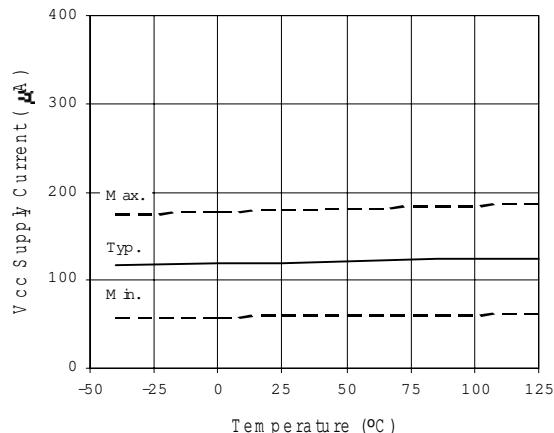


Figure 14A. Quiescent  $V_{CC}$  Supply Current vs. Temperature

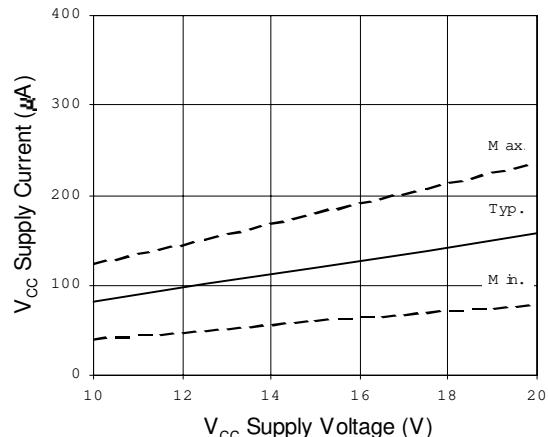


Figure 14B. Quiescent  $V_{CC}$  Supply Current vs.  $V_{CC}$  Supply Voltage

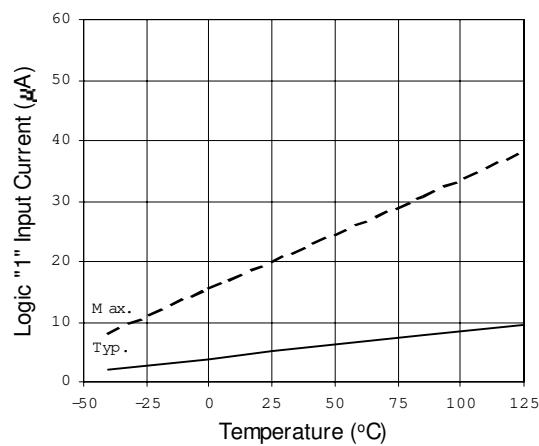


Figure 15A. Logic "1" Input Current vs. Temperature

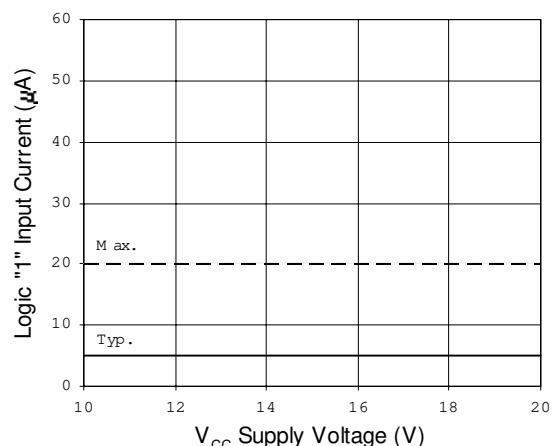


Figure 15B. Logic "1" Bias Current vs. Supply Voltage

# IR2106(4)(S) & (PBF)

International  
**IR** Rectifier

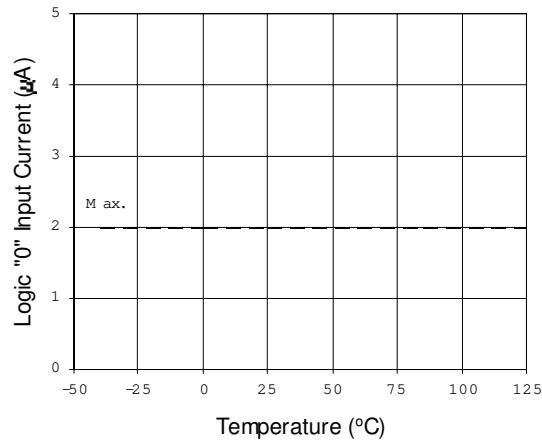


Figure 16A. Logic "0" Input Current vs. Temperature

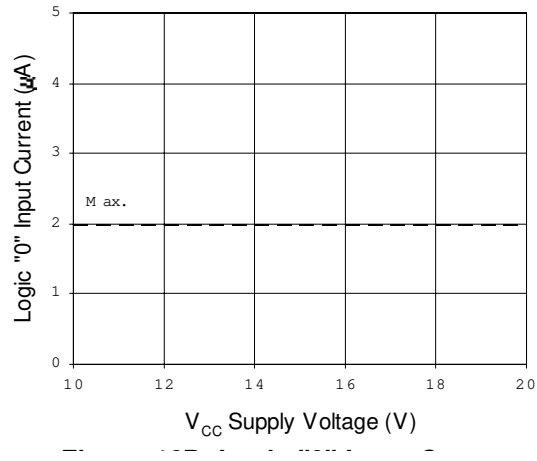


Figure 16B. Logic "0" Input Current vs. Supply Voltage

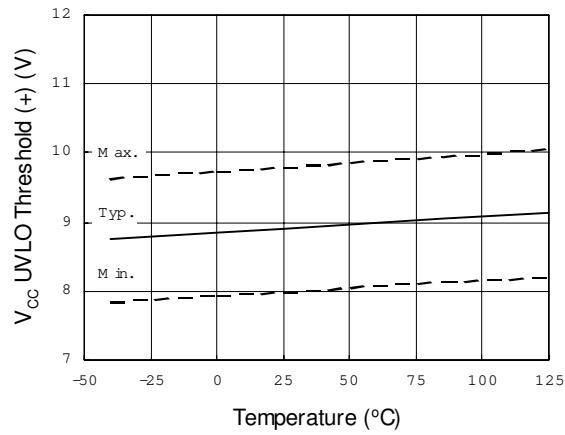


Figure 17.  $V_{\text{CC}}$  Undervoltage Threshold (+) vs. Temperature

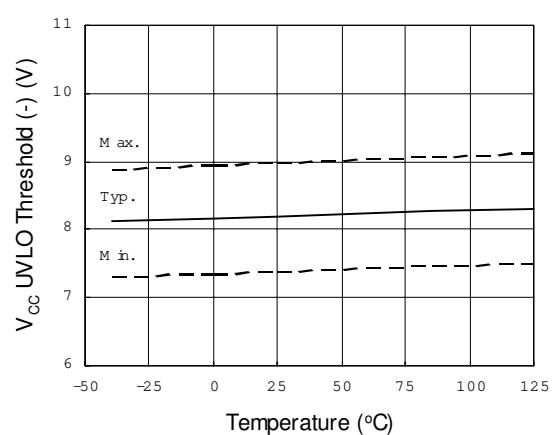


Figure 18.  $V_{\text{CC}}$  Undervoltage Threshold (-) vs. Temperature

## IR2106(4)(S & (PbF))

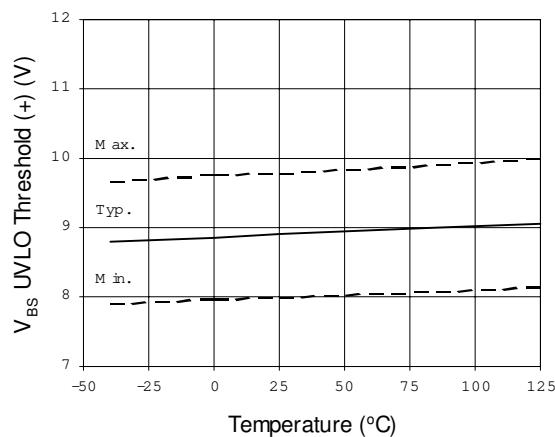


Figure 19. V<sub>BS</sub> Undervoltage Threshold (+)  
vs. Temperature

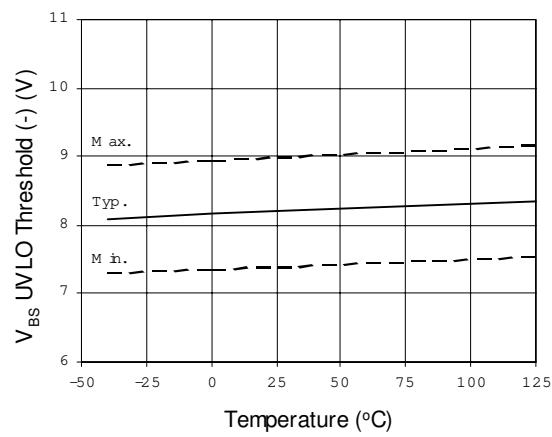


Figure 20. V<sub>BS</sub> Undervoltage Threshold (-)  
vs. Temperature

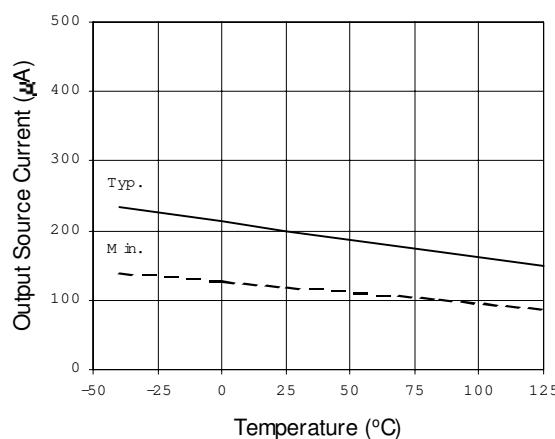


Figure 21A. Output Source Current  
vs. Temperature

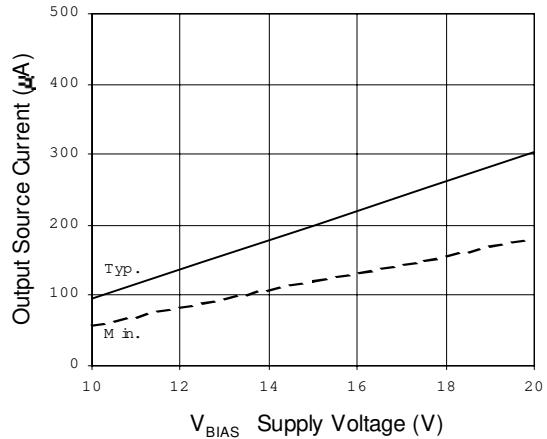


Figure 21B. Output Source Current  
vs. Supply Voltage

# IR2106(4)(S) & (PBF)

International  
**IR** Rectifier

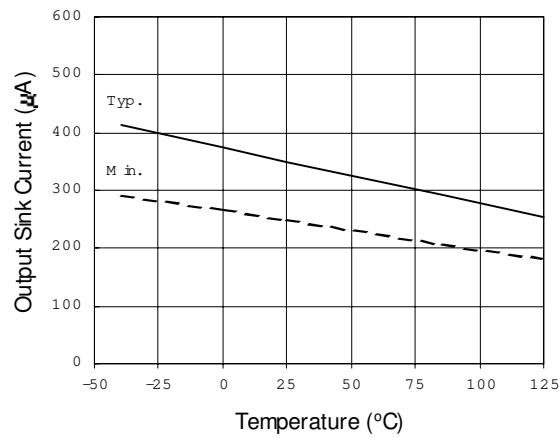


Figure 22A. Output Sink Current vs. Temperature

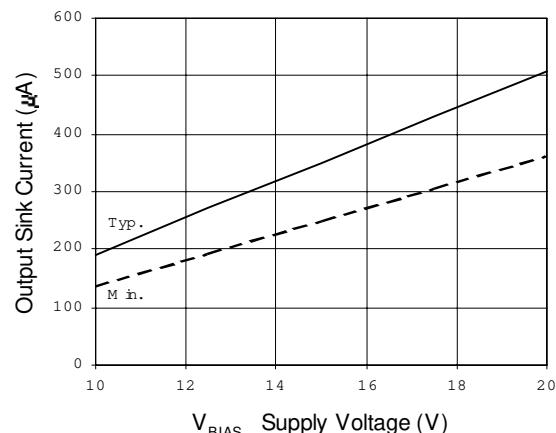


Figure 22B. Output Sink Current vs. Supply Voltage

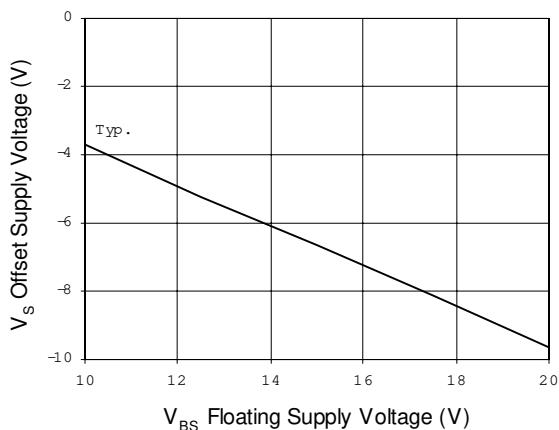


Figure 23. Maximum  $V_{\text{S}}$  Negative Offset vs. Supply Voltage



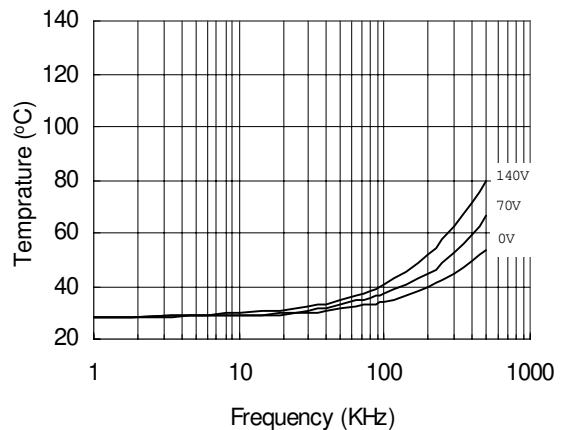


Figure 24. IR2106 vs. Frequency (IRFBC20),  
Rgate=33Ω, VCC=15V


## IR2106(4)(S & (PbF))

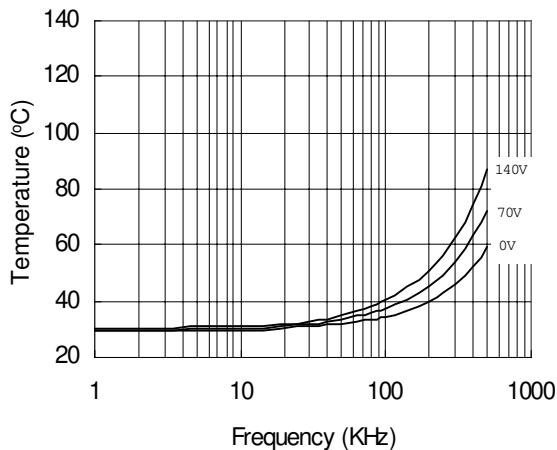


**Figure 25. IR2106 vs. Frequency (IRFBC30),**  
 $R_{\text{gate}}=22\Omega$ ,  $V_{\text{cc}}=15\text{V}$

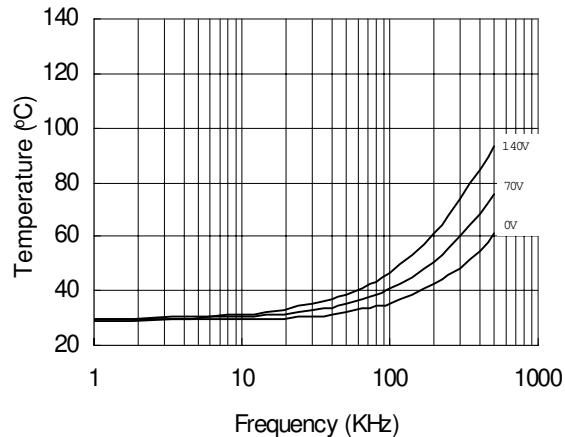

**Figure 26. IR2106 vs. Frequency (IRFBC40),**  
 $R_{\text{gate}}=15\Omega$ ,  $V_{\text{cc}}=15\text{V}$

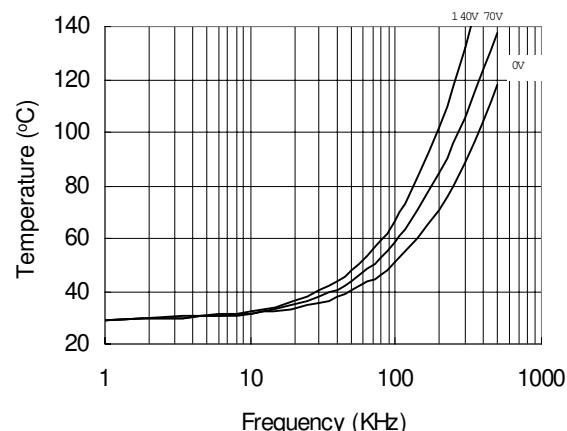

**Figure 27. IR2106 vs. Frequency (IRFPE50),**  
 $R_{\text{gate}}=10\Omega$ ,  $V_{\text{cc}}=15\text{V}$

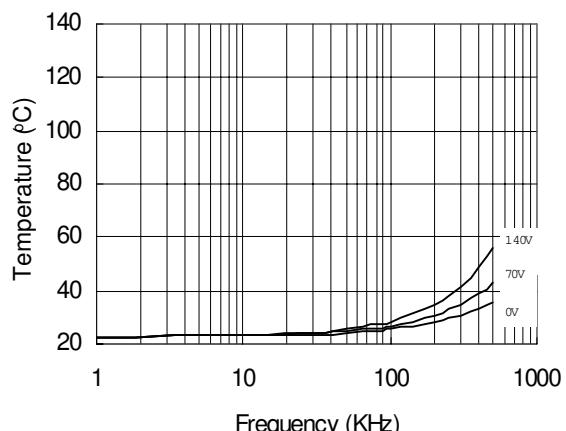

**Figure 28. IR21064 vs. Frequency (IRFBC20),**  
 $R_{\text{gate}}=33\Omega$ ,  $V_{\text{cc}}=15\text{V}$

# IR2106(4)(S) & (PBF)

International  
**IR** Rectifier

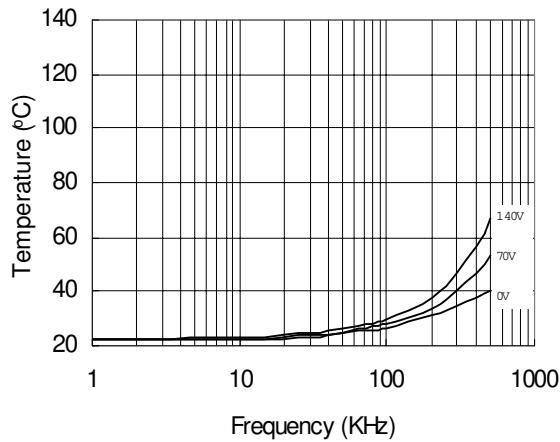


Figure 29. IR21064 vs. Frequency (IRFBC30),  
 $R_{gate}=22\Omega$ ,  $V_{cc}=15V$

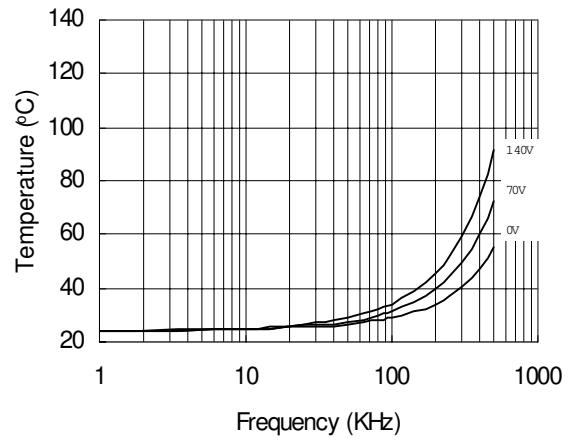


Figure 30. IR21064 vs. Frequency (IRFBC40),  
 $R_{gate}=15\Omega$ ,  $V_{cc}=15V$

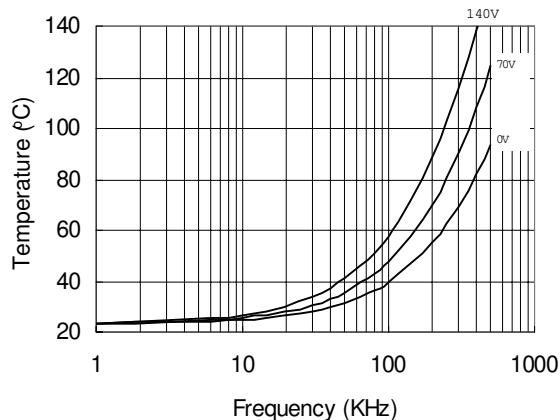


Figure 31. IR21064 vs. Frequency (IRFPE50),  
 $R_{gate}=10\Omega$ ,  $V_{cc}=15V$



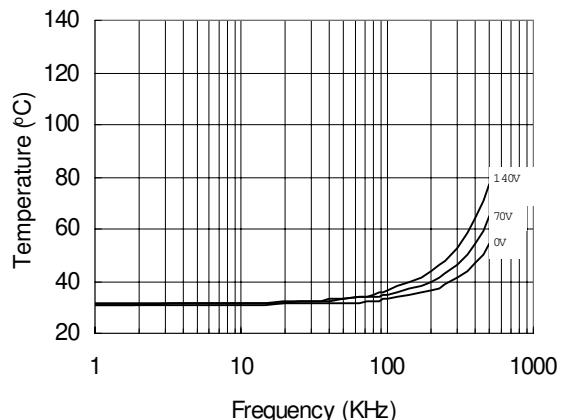


Figure 32. IR2106S vs. Frequency (IRFBC20),  
 $R_{gate}=33\Omega$ ,  $V_{cc}=15V$


## IR2106(4)(S & (PbF))

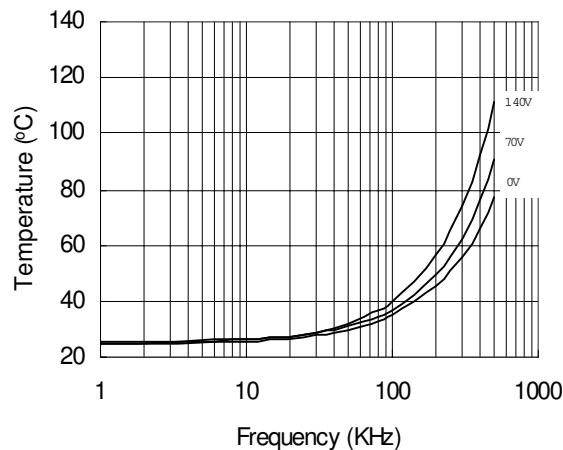


**Figure 33. IR2106S vs. Frequency (IRFBC30),**  
 $R_{\text{gate}}=22\Omega$ ,  $V_{\text{cc}}=15\text{V}$

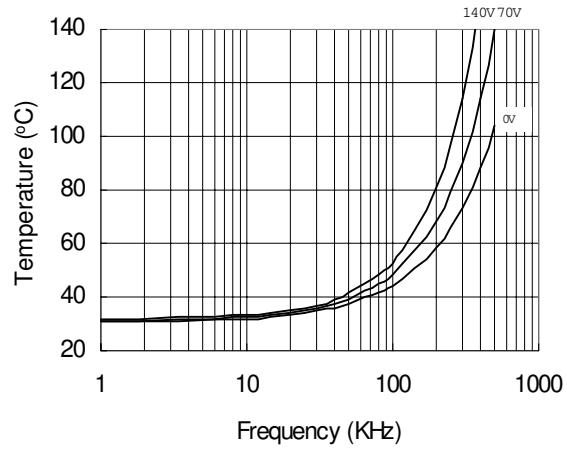

**Figure 34. IR2106S vs. Frequency (IRFBC40),**  
 $R_{\text{gate}}=15\Omega$ ,  $V_{\text{cc}}=15\text{V}$

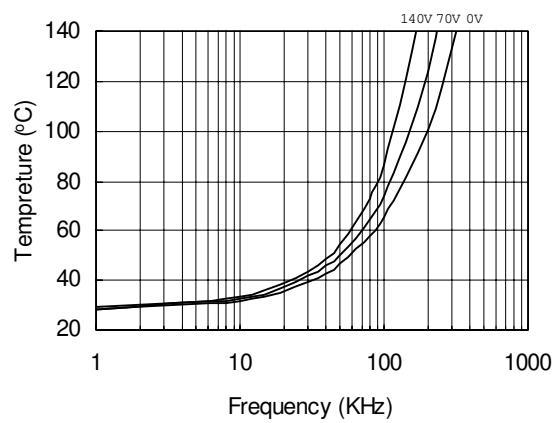


**Figure 35. IR2106S vs. Frequency**  
(IRFPE50),  $R_{\text{gate}}=10\Omega$ ,  $V_{\text{cc}}=15\text{V}$

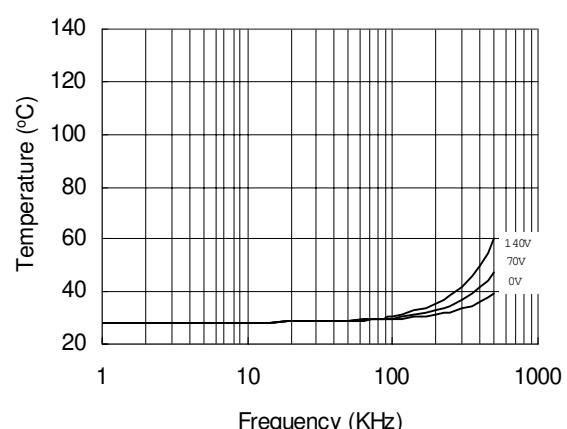


**Figure 36. IR21064S vs. Frequency (IRFBC20),**  
 $R_{\text{gate}}=33\Omega$ ,  $V_{\text{cc}}=15\text{V}$

# IR2106(4)(S) & (PBF)


International  
**IR** Rectifier

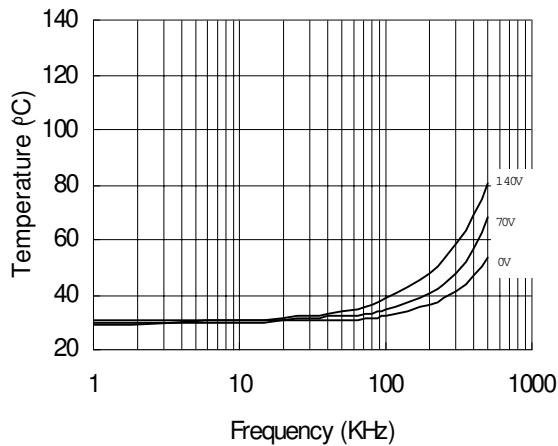

**Figure 37. IR21064S vs. Frequency (IRFBC30),**  
 $R_{gate}=22\Omega$ ,  $V_{cc}=15V$


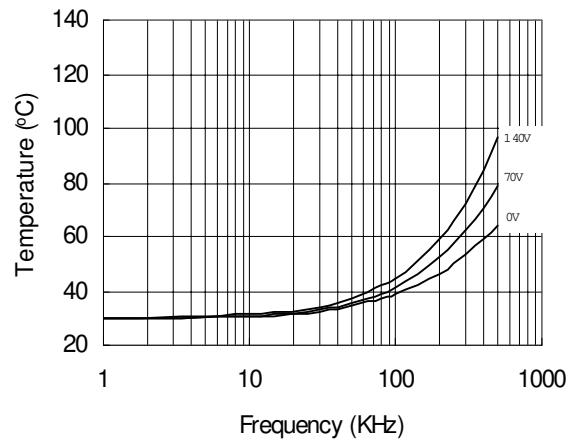


**Figure 38. IR21064S vs. Frequency (IRFBC40),**  
 $R_{gate}=15\Omega$ ,  $V_{cc}=15V$

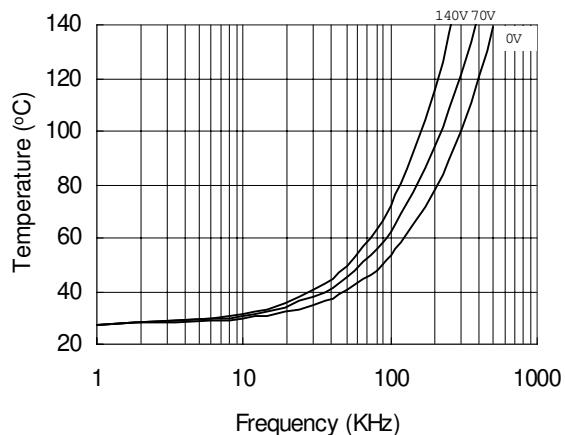



**Figure 39. IR21064S vs. Frequency (IRFPE50),**  
 $R_{gate}=10\Omega$ ,  $V_{cc}=15V$

## Case Outlines

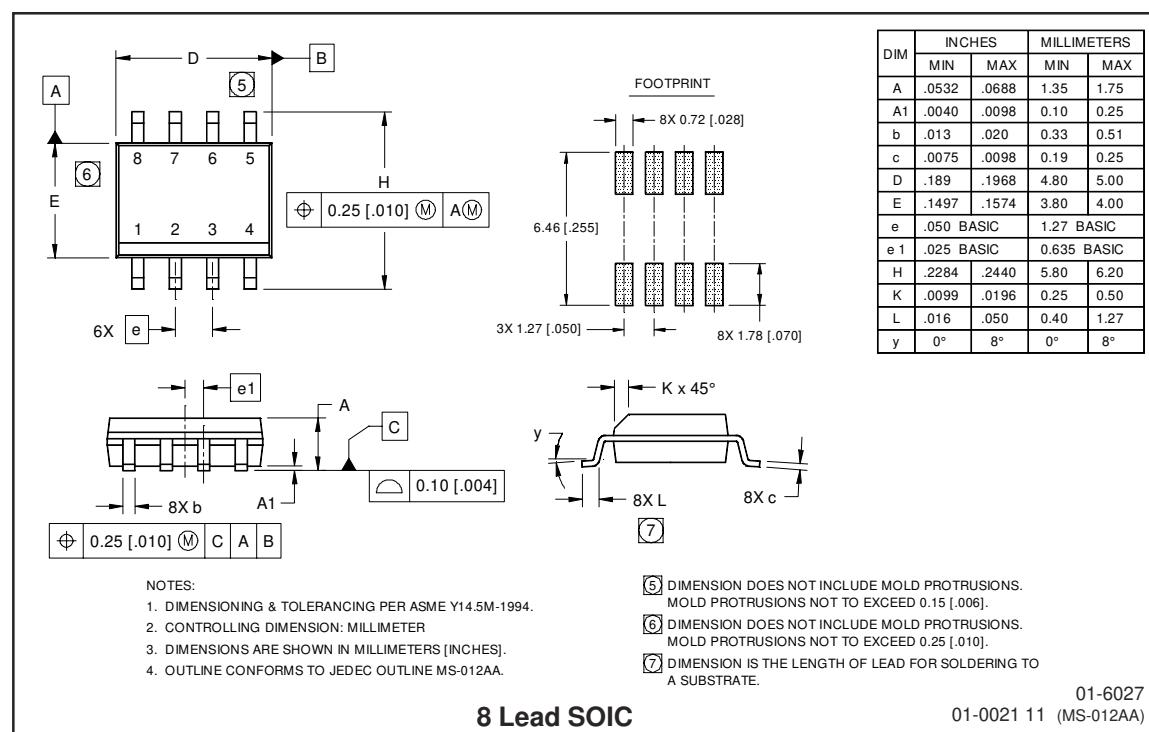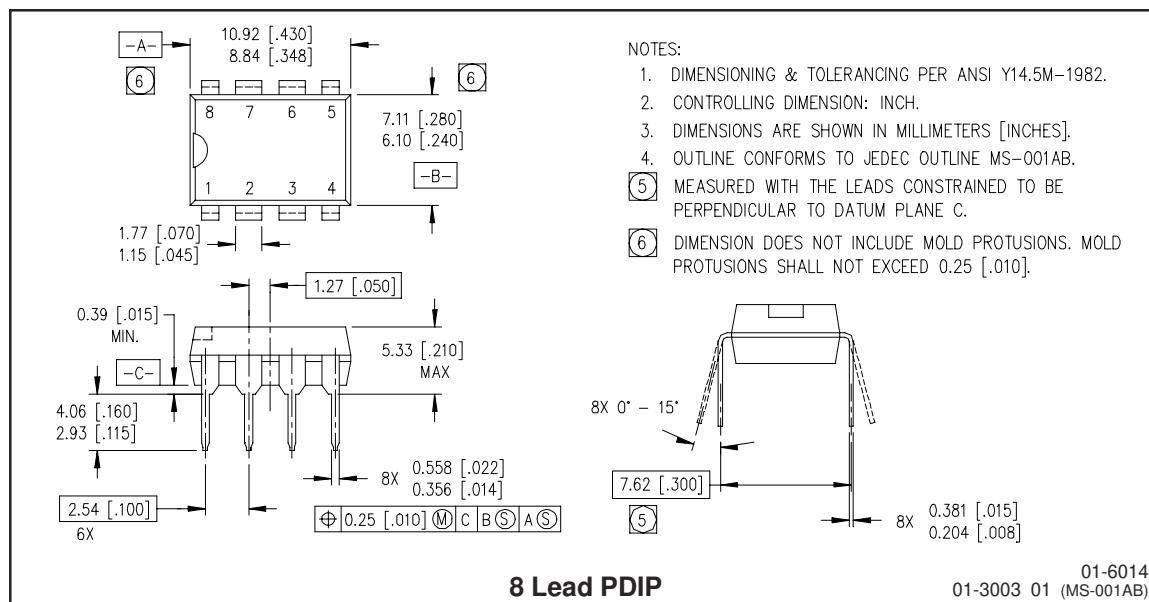


# IR2106(4)(S) & (PBF)

International  
**IR** Rectifier

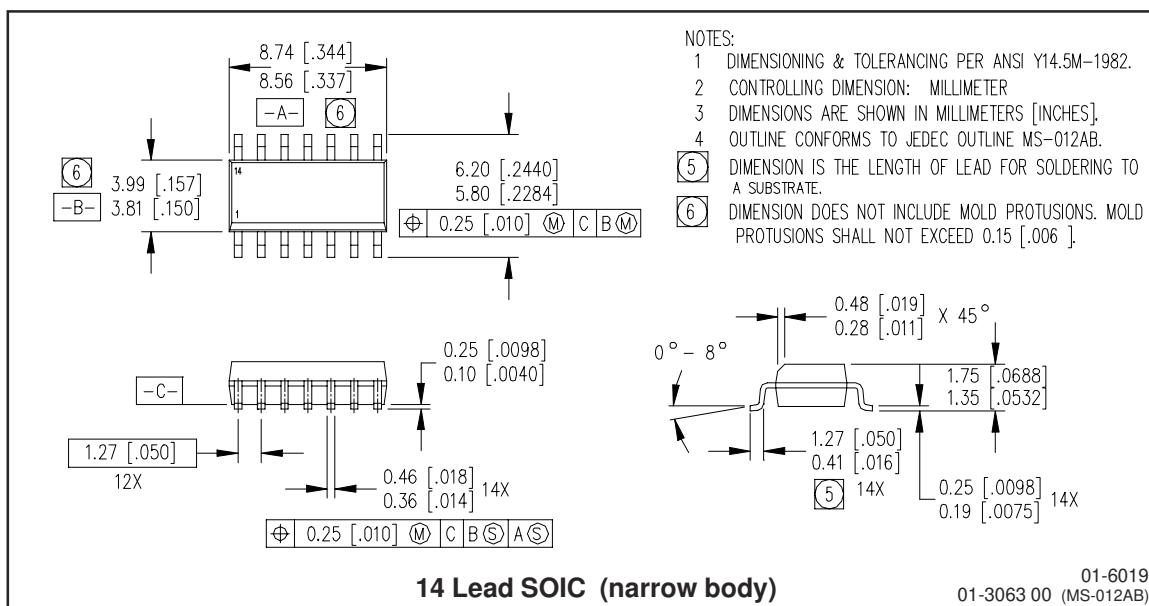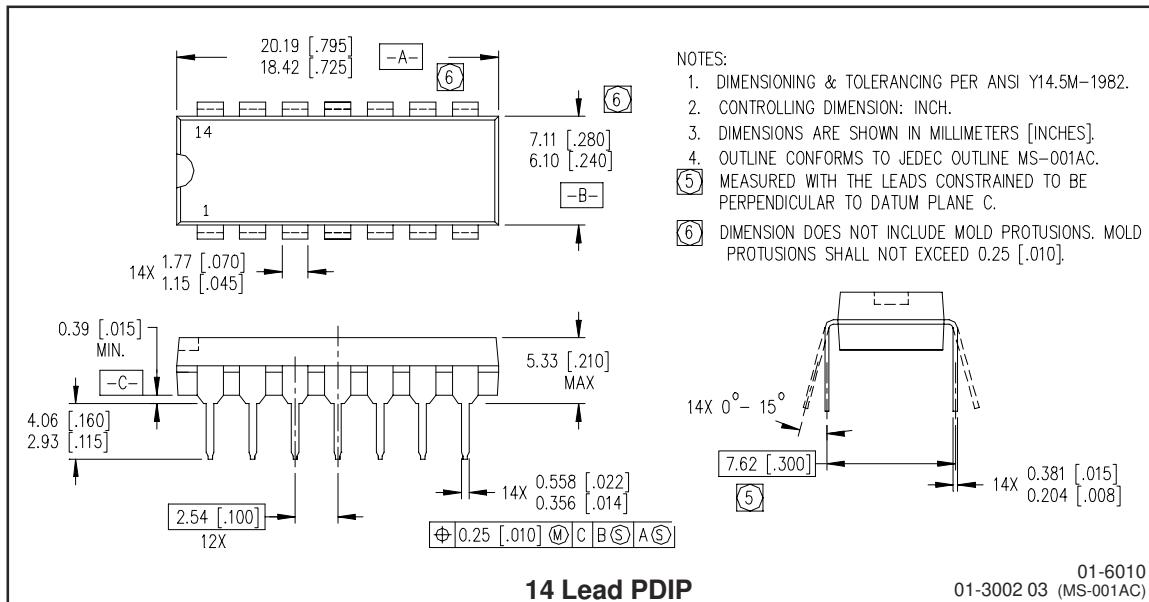

## LEADFREE PART MARKING INFORMATION

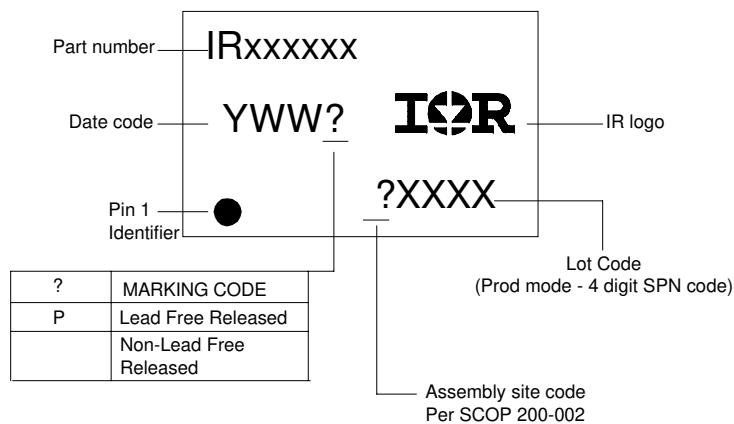

## ORDER INFORMATION

### Basic Part (Non-Lead Free)

8-Lead PDIP IR2106 order IR2106  
8-Lead SOIC IR2106S order IR2106S  
14-Lead PDIP IR21064 order IR21064  
14-Lead SOIC IR21064S order IR21064S

### Leadfree Part

8-Lead PDIP IR2106 order IR2106PbF  
8-Lead SOIC IR2106S order IR2106SPbF  
14-Lead PDIP IR21064 order IR21064PbF  
14-Lead SOIC IR21064S order IR21064SPbF