



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



INTERNATIONAL RECTIFIER

IRD3899, IRD3909 SERIES

20 and 30 Amp Fast Recovery Rectifier Diodes

Major Ratings and Characteristics

	IRD3899 -IRD3903	IRD3909 -IRD3913		
I_F (AV)	20	30	A	
ϕ Max. T_C	100	100	$^{\circ}\text{C}$	
I_{FSM}	50Hz	240	285	A
	60Hz	260	300	A
$i^2 t$	50Hz	285	410	A^2s
	60Hz	260	375	A^2s
$i^2 \sqrt{t}$	4050	5810	$\text{A}^2\sqrt{\text{s}}$	
t_{rr} range	see table		ns	
VRRM range	50-400		V	
T_J range	-40 to 125		$^{\circ}\text{C}$	



Description

This range of fast recovery diodes is designed for applications in DC power supplies, inverters, choppers, ultrasonic systems and for use as a free-wheeling diode.

Features

- Short reverse recovery time
- Low stored charge
- Wide current range
- Excellent surge capabilities
- Stud cathode and stud anode versions

CASE STYLE AND DIMENSIONS

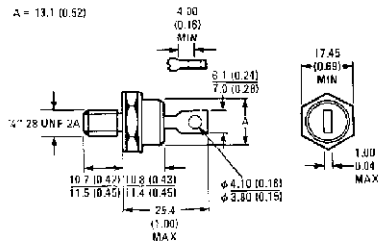

Conforms to JEDEC Outline DO-203AB (DO-5)
All Dimensions in Millimeters and (Inches)

ELECTRICAL SPECIFICATIONS

Reverse voltage ratings

Part number ①	V_{RRM} , Maximum peak repetitive reverse voltage $T_J = -40$ to 125°C		V_{RSM} , Maximum peak non-repetitive reverse voltage: $T_J = 25$ to 125°C		I_{RM} , Maximum peak reverse current at rated V_{RRM} $T_J = 100^\circ\text{C}$		$I_T = I_{R(AV)}$ $T_J = 125^\circ\text{C}$ mA
	V	V	V	mA	mA	mA	
IRD3899	50	75	0.06	6.0	10.0	10.0†	
IRD3900	100	150	0.06	6.0	10.0	10.0†	
IRD3901	200	250	0.05	5.0	10.0	10.0†	
IRD3902	300	350	0.05	5.0	10.0	10.0†	
IRD3903	400	450	0.05	5.0	10.0	10.0†	
IRD3909	50	75	0.08	10.0	10.0	15.0†	
IRD3910	100	150	0.08	10.0	10.0	15.0†	
IRD3911	200	250	0.08	10.0	10.0	15.0†	
IRD3912	300	350	0.08	10.0	10.0	15.0†	
IRD3913	400	450	0.08	10.0	10.0	15.0†	

① Types listed are cathode case, for anode case, add "R" to code, i.e. IRD3899R etc.

Reverse recovery characteristics

	IRD3899 -IRD3903	IRD3909 -IRD3913	Units	Conditions
t_{rr} Maximum reverse recovery time	200	200	ns	$T_J = 25^\circ\text{C}$, $I_F = 1\text{A}$ to $V_R = 30\text{V}$ - $dI_F/dt = 100\text{A}/\mu\text{s}$
	350	360	ns	$T_J = 25^\circ\text{C}$, $-dI_{F(10)} = 25\text{A}/\mu\text{s}$ $I_{FM} = \pi \times \text{rated } I_{F(AV)}$
Q_{RR} Maximum reverse recovered charge	800	800	nC	$T_J = 25^\circ\text{C}$, $I_F = 1\text{A}$ to $V_R = 30\text{V}$ - $dI_F/dt = 100\text{A}/\mu\text{s}$
	1000	1000	nC	$T_J = 25^\circ\text{C}$, $-dI_{F(10)} = 25\text{A}/\mu\text{s}$ $I_{FM} = \pi \times \text{rated } I_{F(AV)}$

Forward conduction

	IRD3899 -IRD3903	IRD3909 -IRD3913	Units	Conditions
$I_{F(AV)}$ Maximum average forward current	20	30	A	180° conduction half sine wave $T_C = 100^\circ\text{C}$
$I_{F(RMS)}$ Maximum rms forward current	31	47	A	
I_{FSM} Maximum peak, one cycle non-repetitive forward current	240	285	A	$t = 10\text{ms}$
	250	300	A	$t = 8.3\text{ms}$ Sinusoidal half wave, 100% V_{RRM} reapplied, initial $T_J = 125^\circ\text{C}$
	285	340	A	$t = 10\text{ms}$
	295	355	A	$t = 8.3\text{ms}$ Sinusoidal half wave, no voltage reapplied, initial $T_J = 125^\circ\text{C}$
I_{T}^2 Maximum I_{T}^2 for fusing	285	410	A^2s	$t = 10\text{ms}$
	260	375	A^2s	$t = 8.3\text{ms}$ 100% V_{RRM} reapplied, initial $T_J = 125^\circ\text{C}$
Maximum $I_{T}^2 t$, for individual device fusing.	405	580	A^2s	$t = 10\text{ms}$ No voltage reapplied, initial $T_J = 125^\circ\text{C}$
	370	530	A^2s	$t = 8.3\text{ms}$
$I_{T}^2 \sqrt{t}$ Maximum $I_{T}^2 \sqrt{t}$ for (ind. device fusing) ②	4050	5810	$\text{A}^2\sqrt{\text{s}}$	$t = 0.1 - 10\text{ms}$, no voltage reapplied
V_{FM} Maximum peak forward voltage	1.65	1.80	V	$T_J = 25^\circ\text{C}$, $I_{FM} = \pi \times \text{rated } I_{F(AV)}$

② I_{T}^2 for time $t_x = I_{T}^2 \sqrt{t} = \sqrt{I_{T}^2 t}$.

THERMAL AND MECHANICAL SPECIFICATIONS

		IRD3899 -IRD3903	IRD3909 -IRD3913	Units	Conditions
T_J	Junction operating temperature range	-40 to 125		$^{\circ}\text{C}$	
T_{stg}	Storage temperature range	-40 to 150		$^{\circ}\text{C}$	
$R_{th(j-c)}$	Maximum internal thermal resistance, junction to case	0.6	0.46	deg C/W	DC operation
$R_{th(c-s)}$	Maximum thermal resistance case to heatsink	0.25		deg C/W	Mounting surface flat, smooth and greased
T	Mounting torque $\pm 10\%$	to nut	20 (27)	lbf.in	Lubricated threads (non-lubricated threads)
			0.23 (0.29)	kgf.cm	
		to device	2.2 (2.7)	Nm	
			22	lbf.in	
			0.25	kgf.cm	
wt	Approximate weight	25	g		
		0.89	oz		
Case style		DO-203AB (DO-5)			JEDEC




Fig. 1 - Average Forward Current Vs. Maximum Allowable Case Temperature, IRD3899 Series


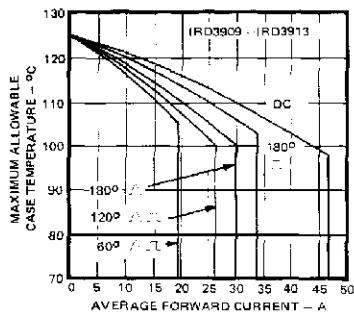


Fig. 2 - Average Forward Current Vs. Maximum Allowable Case Temperature, IRD3909 Series



- I_F, I_{FM} = Peak forward current prior to commutation
- $-dI_F/dt$ = Rate of fall of forward current
- $I_{RM(REC)}$ = Peak reverse recovery current
- t_{rr} = Reverse recovery time
- Q_{RR} = Reverse recovered charge

Fig. 3 - Reverse Recovery Time Test Waveform

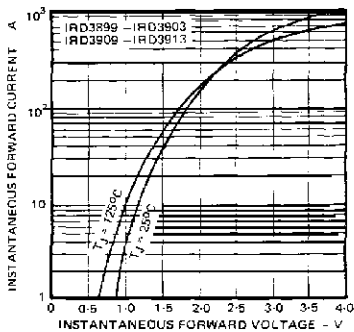


Fig. 4 – Maximum Forward Voltage Vs. Forward Current, Both Series

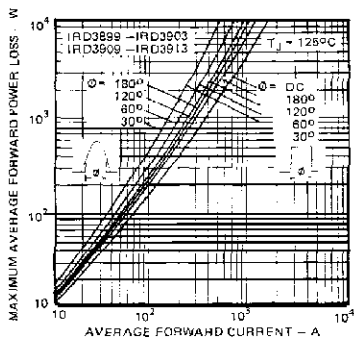


Fig. 5 – Maximum Forward Power Loss Vs. Average Forward Current, Both Series

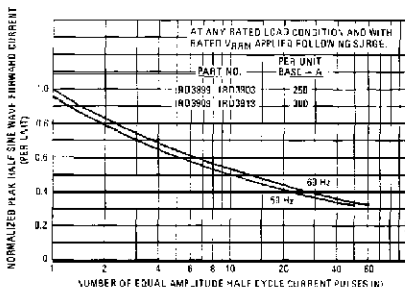


Fig. 6 – Maximum Non-Repetitive Surge Current Vs. Number of Current Pulses, Both Series

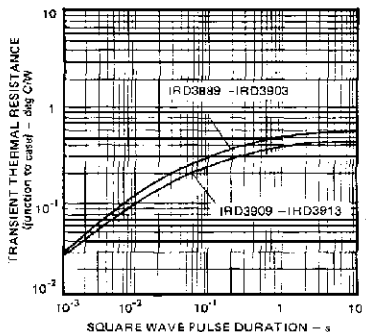


Fig. 7 – Maximum Transient Thermal Impedance, Junction-to-Case Vs. Pulse Duration, Both Series



Notice

The products described herein were acquired by Vishay Intertechnology, Inc., as part of its acquisition of International Rectifier's Power Control Systems (PCS) business, which closed in April 2007. Specifications of the products displayed herein are pending review by Vishay and are subject to the terms and conditions shown below.

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.

International Rectifier®, IR®, the IR logo, HEXFET®, HEXSense®, HEXDIP®, DOL®, INTERO®, and POWIRTRAIN® are registered trademarks of International Rectifier Corporation in the U.S. and other countries. All other product names noted herein may be trademarks of their respective owners.