



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

IRF9910PbF

HEXFET® Power MOSFET


Applications

- Dual SO-8 MOSFET for POL converters in desktop, servers, graphics cards, game consoles and set-top box
- Lead-Free

V_{DSS}	R_{DS(on)} max	I_D
20V	Q1 13.4mΩ@V_{GS} = 10V	10A
	Q2 9.3mΩ@V_{GS} = 10V	12A

Benefits

- Very Low R_{DS(on)} at 4.5V V_{GS}
- Low Gate Charge
- Fully Characterized Avalanche Voltage and Current
- 20V V_{GS} Max. Gate Rating

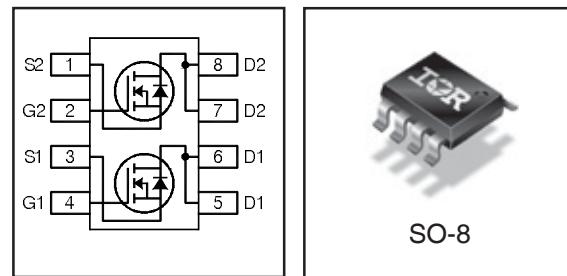

Absolute Maximum Ratings

	Parameter	Q1 Max.	Q2 Max.	Units
V _{DS}	Drain-to-Source Voltage	20		V
V _{GS}	Gate-to-Source Voltage		± 20	
I _D @ T _A = 25°C	Continuous Drain Current, V _{GS} @ 10V	10	12	
I _D @ T _A = 70°C	Continuous Drain Current, V _{GS} @ 10V	8.3	9.9	A
I _{DM}	Pulsed Drain Current ①	83	98	
P _D @ T _A = 25°C	Power Dissipation	2.0		W
P _D @ T _A = 70°C	Power Dissipation	1.3		
	Linear Derating Factor	0.016		W/°C
T _J	Operating Junction and	-55 to +150		°C
T _{STG}	Storage Temperature Range			

Thermal Resistance

	Parameter	Typ.	Max.	Units
R _{θJL}	Junction-to-Drain Lead	—	42	°C/W
R _{θJA}	Junction-to-Ambient ④⑤	—	62.5	

Notes ① through ⑤ are on page 10

IRF9910PbF

International
Rectifier

Static @ $T_J = 25^\circ\text{C}$ (unless otherwise specified)

	Parameter		Min.	Typ.	Max.	Units	Conditions
BV_{DSS}	Drain-to-Source Breakdown Voltage	Q1&Q2	20	—	—	V	$V_{\text{GS}} = 0\text{V}, I_D = 250\mu\text{A}$
$\Delta \text{BV}_{\text{DSS}/\Delta T_J}$	Breakdown Voltage Temp. Coefficient	Q1	—	0.0061	—	$^\circ\text{C}$	Reference to 25°C , $I_D = 1\text{mA}$
$R_{\text{DS(on)}}$	Static Drain-to-Source On-Resistance	Q1	—	10.7	13.4	$\text{m}\Omega$	$V_{\text{GS}} = 10\text{V}, I_D = 10\text{A}$ ③
		—	—	14.6	18.3		$V_{\text{GS}} = 4.5\text{V}, I_D = 8.3\text{A}$ ③
		Q2	—	7.4	9.3		$V_{\text{GS}} = 10\text{V}, I_D = 12\text{A}$ ③
		—	—	9.1	11.3		$V_{\text{GS}} = 4.5\text{V}, I_D = 9.8\text{A}$ ③
$V_{\text{GS(th)}}$	Gate Threshold Voltage	Q1&Q2	1.65	—	2.55	V	$V_{\text{DS}} = V_{\text{GS}}, I_D = 250\mu\text{A}$
$\Delta V_{\text{GS(th)}}/\Delta T_J$	Gate Threshold Voltage Coefficient	Q1	—	-4.9	—	$\text{mV}/^\circ\text{C}$	—
		Q2	—	-5.0	—		—
I_{DSS}	Drain-to-Source Leakage Current	Q1&Q2	—	—	1.0	μA	$V_{\text{DS}} = 16\text{V}, V_{\text{GS}} = 0\text{V}$
		Q1&Q2	—	—	100	—	$V_{\text{DS}} = 16\text{V}, V_{\text{GS}} = 0\text{V}, T_J = 125^\circ\text{C}$
I_{GSS}	Gate-to-Source Forward Leakage	Q1&Q2	—	—	100	nA	$V_{\text{GS}} = 20\text{V}$
	Gate-to-Source Reverse Leakage	Q1&Q2	—	—	-100	—	$V_{\text{GS}} = -20\text{V}$
g_{fs}	Forward Transconductance	Q1	19	—	—	S	$V_{\text{DS}} = 10\text{V}, I_D = 8.3\text{A}$
		Q2	27	—	—		$V_{\text{DS}} = 10\text{V}, I_D = 9.8\text{A}$
Q_g	Total Gate Charge	Q1	—	7.4	11	nC	Q1 $V_{\text{DS}} = 10\text{V}$ $V_{\text{GS}} = 4.5\text{V}, I_D = 8.3\text{A}$
		Q2	—	15	23		
Q_{qs1}	Pre-V _{th} Gate-to-Source Charge	Q1	—	2.6	—		
		Q2	—	4.3	—		
Q_{qs2}	Post-V _{th} Gate-to-Source Charge	Q1	—	0.85	—		
		Q2	—	1.4	—		
Q_{qd}	Gate-to-Drain Charge	Q1	—	2.5	—		
		Q2	—	5.4	—		
Q_{qodr}	Gate Charge Overdrive	Q1	—	1.5	—		
		Q2	—	3.9	—		
Q_{sw}	Switch Charge ($Q_{\text{qs2}} + Q_{\text{qd}}$)	Q1	—	3.4	—		
		Q2	—	6.8	—		
Q_{oss}	Output Charge	Q1	—	4.0	—	nC	$V_{\text{DS}} = 10\text{V}, V_{\text{GS}} = 0\text{V}$
		Q2	—	8.7	—		
$t_{\text{d(on)}}$	Turn-On Delay Time	Q1	—	6.3	—		
		Q2	—	8.3	—		
t_r	Rise Time	Q1	—	10	—		
		Q2	—	14	—		
$t_{\text{d(off)}}$	Turn-Off Delay Time	Q1	—	9.2	—		
		Q2	—	15	—		
t_f	Fall Time	Q1	—	4.5	—		
		Q2	—	7.5	—		
C_{iss}	Input Capacitance	Q1	—	900	—	pF	$V_{\text{GS}} = 0\text{V}$ $V_{\text{DS}} = 10\text{V}$ $f = 1.0\text{MHz}$
		Q2	—	1860	—		
C_{oss}	Output Capacitance	Q1	—	290	—		
		Q2	—	600	—		
C_{rss}	Reverse Transfer Capacitance	Q1	—	140	—		
		Q2	—	310	—		

Avalanche Characteristics

	Parameter		Typ.	Q1 Max.	Q2 Max.	Units
E_{AS}	Single Pulse Avalanche Energy ②	—	—	33	26	mJ
I_{AR}	Avalanche Current ①	—	—	8.3	9.8	A

Diode Characteristics

	Parameter		Min.	Typ.	Max.	Units	Conditions
I_s	Continuous Source Current (Body Diode)	Q1&Q2	—	—	2.5	A	MOSFET symbol showing the integral reverse p-n junction diode.
I_{SM}	Pulsed Source Current (Body Diode) ①	Q1	—	—	83	A	$T_J = 25^\circ\text{C}, I_s = 8.3\text{A}, V_{\text{GS}} = 0\text{V}$ ③ $T_J = 25^\circ\text{C}, I_s = 9.8\text{A}, V_{\text{GS}} = 0\text{V}$ ③
		Q2	—	—	98	—	
V_{SD}	Diode Forward Voltage	Q1	—	—	1.0	V	$T_J = 25^\circ\text{C}, I_s = 8.3\text{A}, V_{\text{GS}} = 0\text{V}$ ③ $T_J = 25^\circ\text{C}, I_s = 9.8\text{A}, V_{\text{GS}} = 0\text{V}$ ③
		Q2	—	—	1.0	—	
t_{rr}	Reverse Recovery Time	Q1	—	11	17	ns	Q1 $T_J = 25^\circ\text{C}, I_F = 8.3\text{A}, V_{\text{DD}} = 10\text{V}, dI/dt = 100\text{A}/\mu\text{s}$ ③ Q2 $T_J = 25^\circ\text{C}, I_F = 9.8\text{A}, V_{\text{DD}} = 10\text{V}, dI/dt = 100\text{A}/\mu\text{s}$ ③
		Q2	—	16	24		
Q_{rr}	Reverse Recovery Charge	Q1	—	3.1	4.7	nC	Q1 $T_J = 25^\circ\text{C}, I_F = 8.3\text{A}, V_{\text{DD}} = 10\text{V}, dI/dt = 100\text{A}/\mu\text{s}$ ③ Q2 $T_J = 25^\circ\text{C}, I_F = 9.8\text{A}, V_{\text{DD}} = 10\text{V}, dI/dt = 100\text{A}/\mu\text{s}$ ③
		Q2	—	4.9	7.3		

Typical Characteristics

IRF9910PbF

Q1 - Control FET

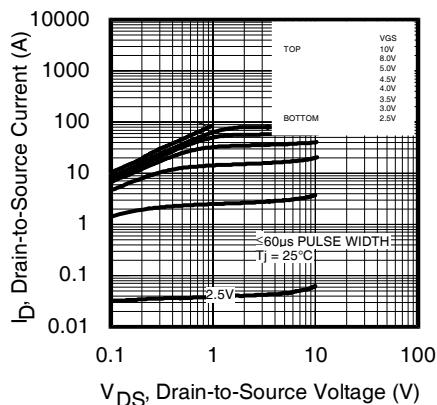


Fig 1. Typical Output Characteristics

Q2 - Synchronous FET

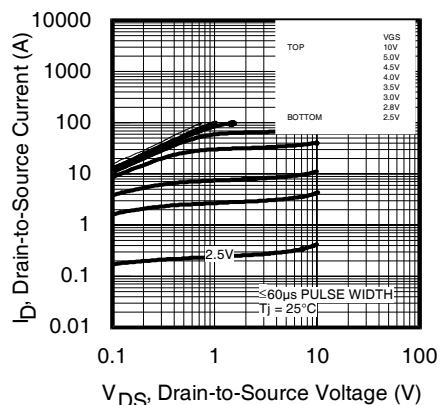


Fig 2. Typical Output Characteristics

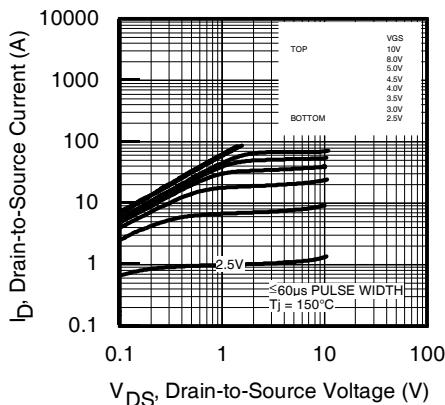


Fig 3. Typical Output Characteristics

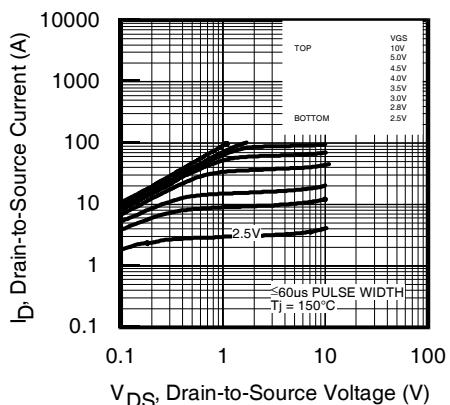


Fig 4. Typical Output Characteristics

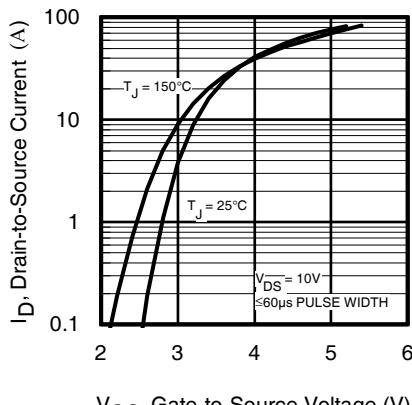


Fig 5. Typical Transfer Characteristics
www.irf.com

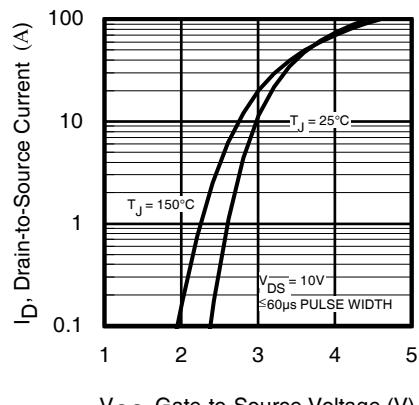


Fig 6. Typical Transfer Characteristics

IRF9910PbF

Typical Characteristics

International
IR Rectifier

Q1 - Control FET

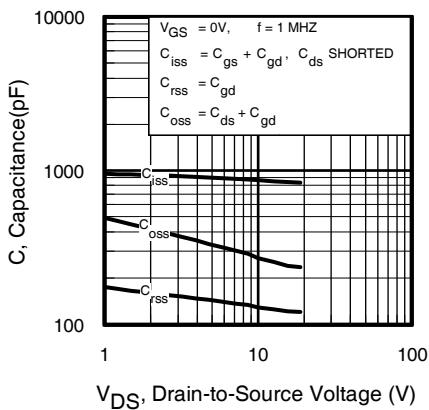


Fig 7. Typical Capacitance Vs.Drain-to-Source Voltage

Q2 - Synchronous FET

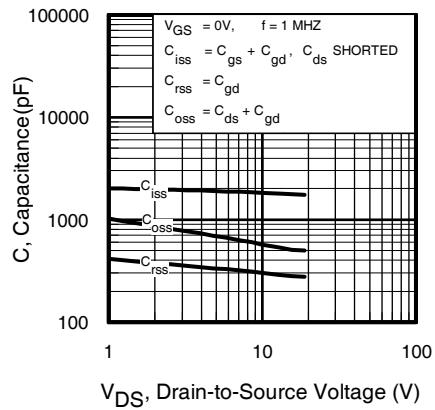


Fig 8. Typical Capacitance Vs.Drain-to-Source Voltage

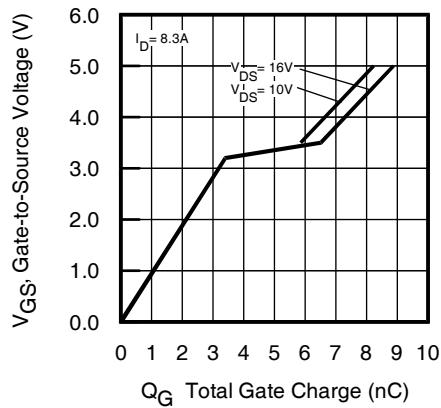


Fig. 9. Gate-to-Source Voltage vs Typical Gate Charge

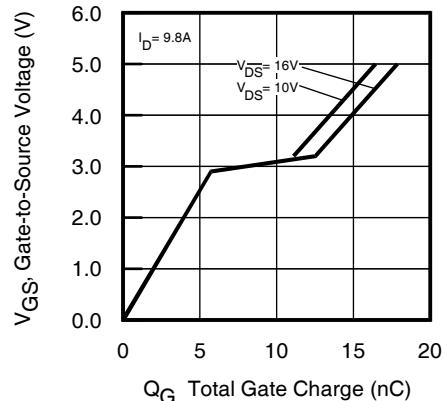


Fig. 10. Gate-to-Source Voltage vs Typical Gate Charge

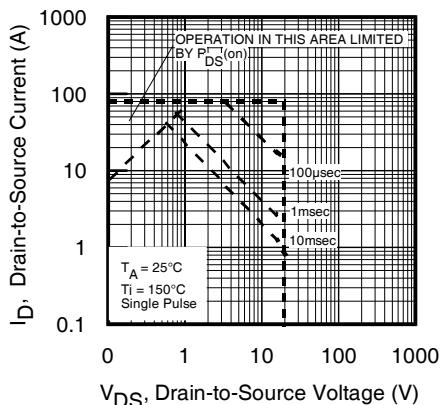


Fig 11. Maximum Safe Operating Area

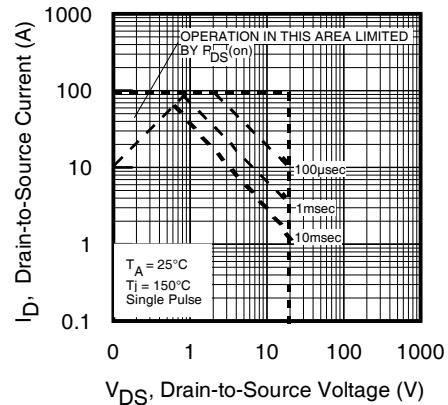


Fig 12. Maximum Safe Operating Area

Typical Characteristics

IRF9910PbF

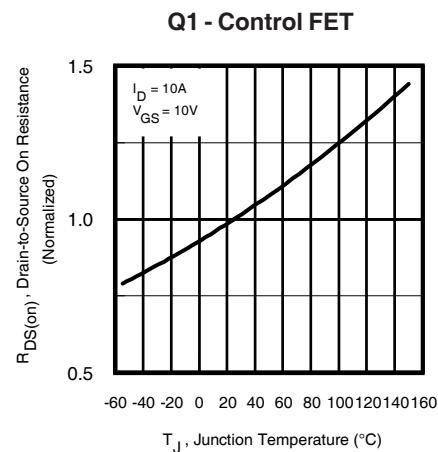


Fig 13. Normalized On-Resistance vs. Temperature

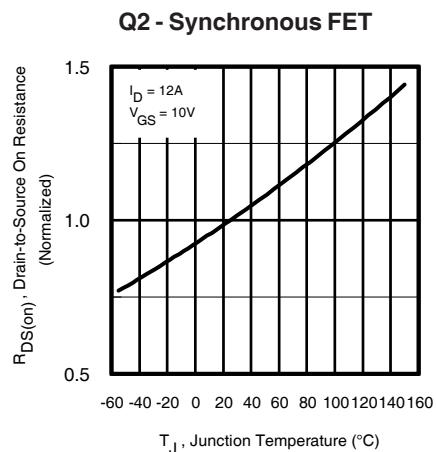


Fig 14. Normalized On-Resistance vs. Temperature

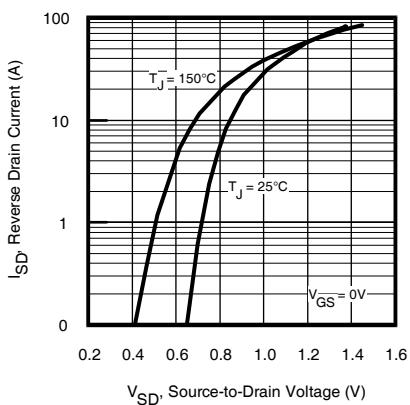


Fig 15. Typical Source-Drain Diode Forward Voltage

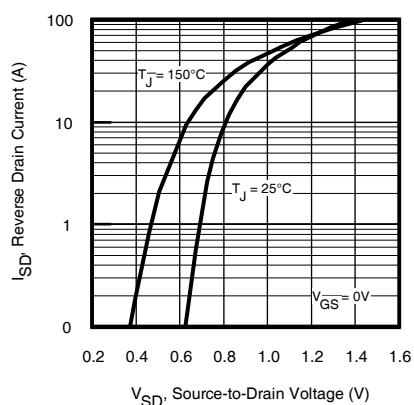


Fig 16. Typical Source-Drain Diode Forward Voltage

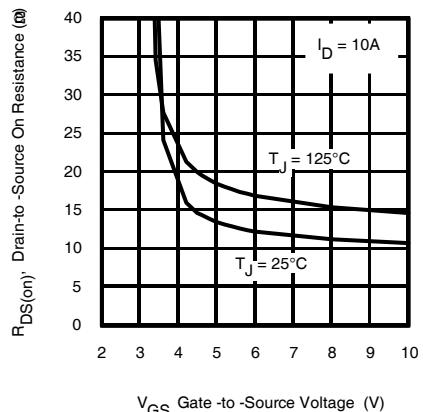


Fig 17. Typical On-Resistance vs. Gate Voltage

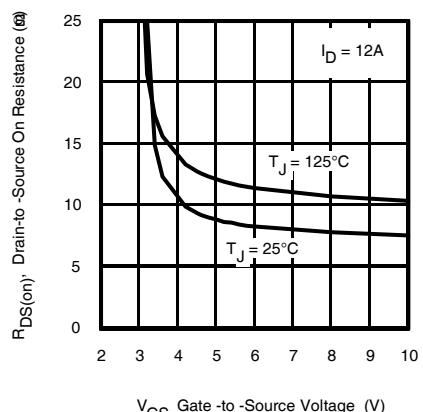


Fig 18. Typical On-Resistance vs. Gate Voltage

IRF9910PbF

Typical Characteristics

International
Rectifier

Q1 - Control FET

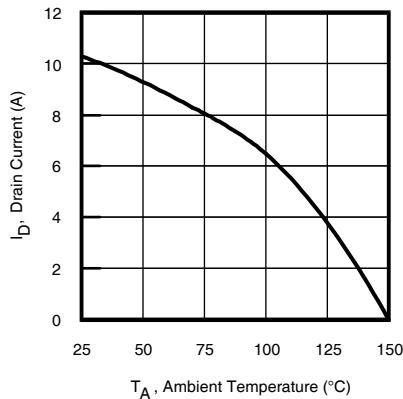


Fig 19. Maximum Drain Current vs. Ambient Temperature

Q2 - Synchronous FET

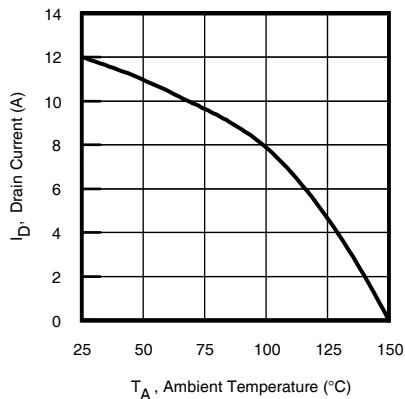


Fig 20. Maximum Drain Current vs. Ambient Temperature

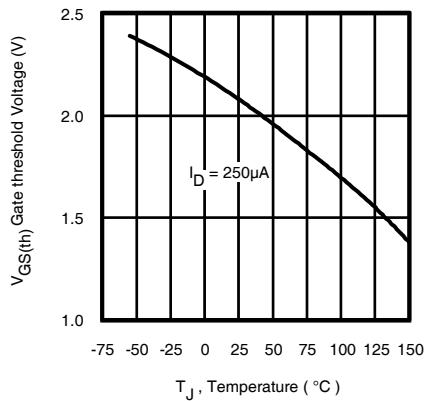


Fig 21. Threshold Voltage vs. Temperature

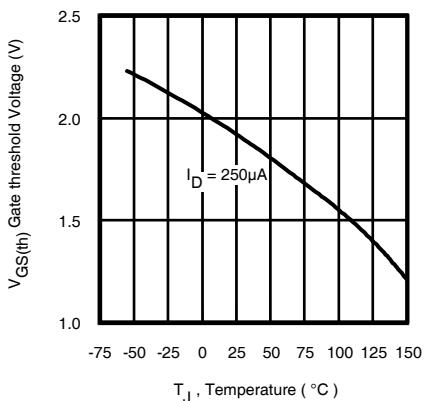


Fig 22. Threshold Voltage vs. Temperature

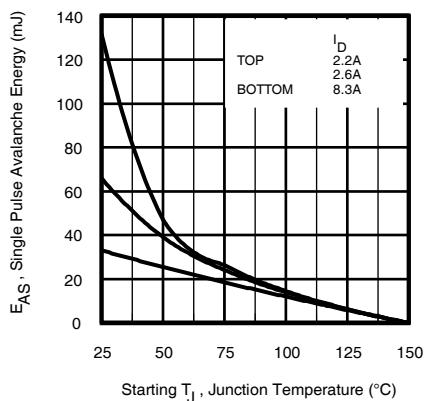


Fig 23. Maximum Avalanche Energy vs. Drain Current

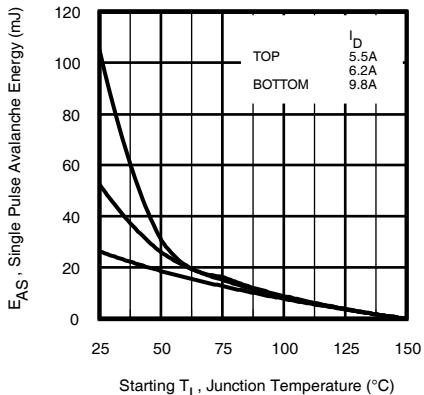


Fig 24. Maximum Avalanche Energy vs. Drain Current

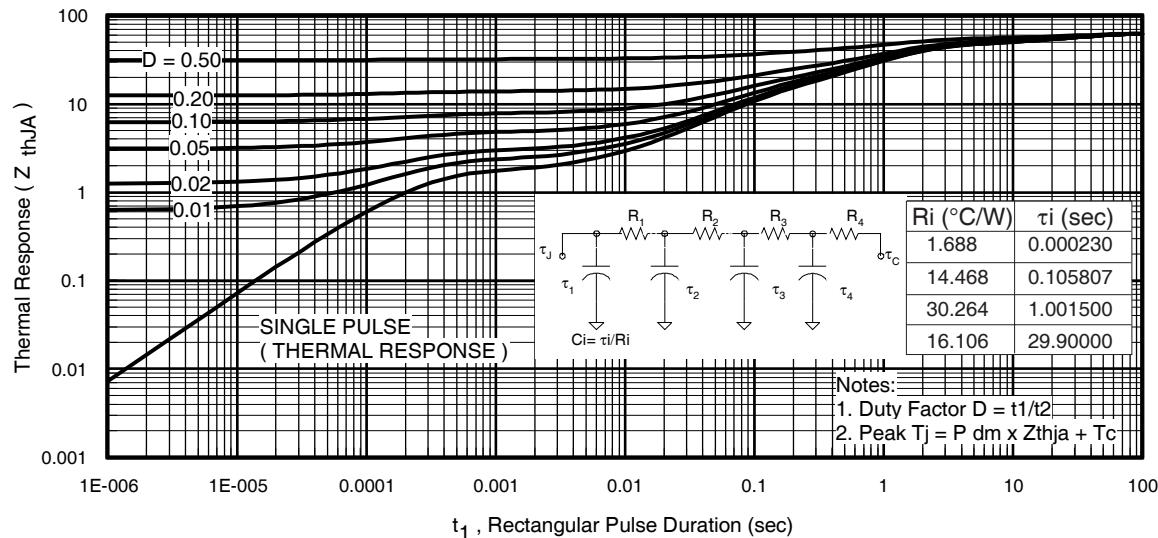


Fig 25. Maximum Effective Transient Thermal Impedance, Junction-to-Ambient

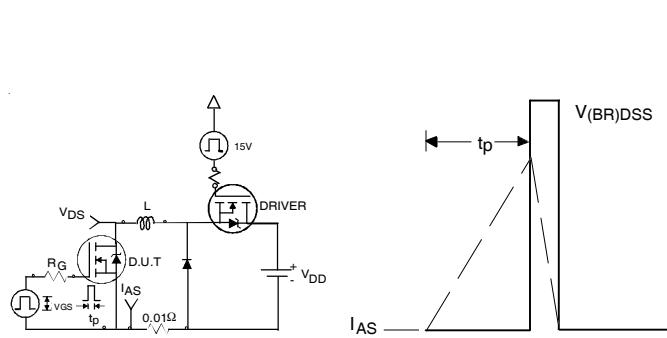


Fig 26. Unclamped Inductive Test Circuit and Waveform

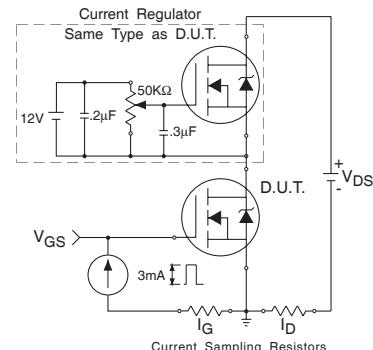


Fig 27. Gate Charge Test Circuit

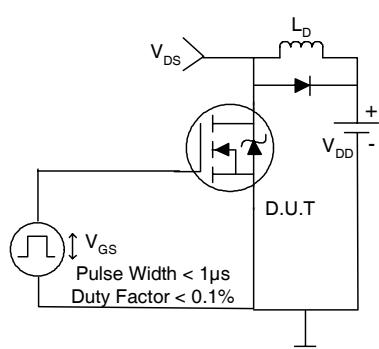


Fig 28. Switching Time Test Circuit
www.irf.com

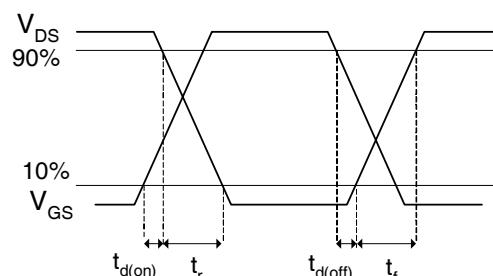


Fig 29. Switching Time Waveforms

IRF9910PbF

International
Rectifier

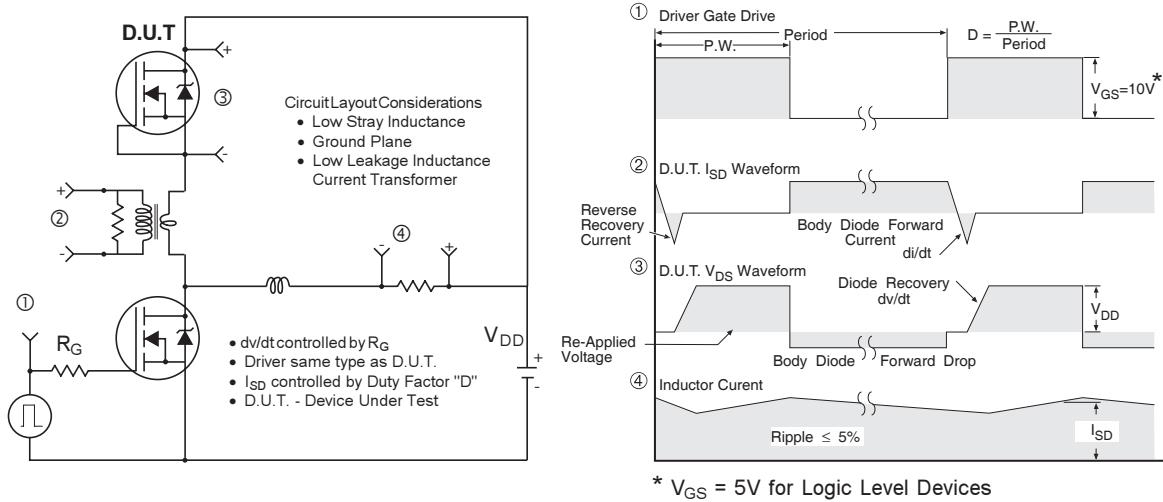


Fig 30. Peak Diode Recovery dv/dt Test Circuit for N-Channel HEXFET® Power MOSFETs


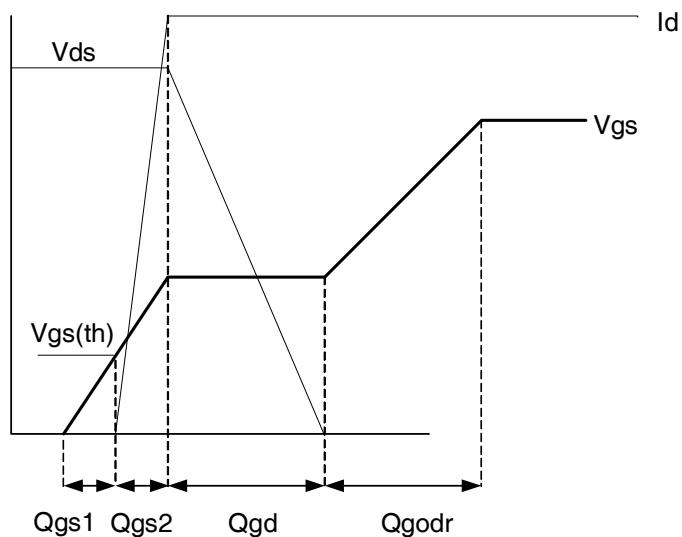





Fig 31. Gate Charge Waveform

SO-8 Package Outline (Mosfet & Fetky)

Dimensions are shown in millimeters (inches)

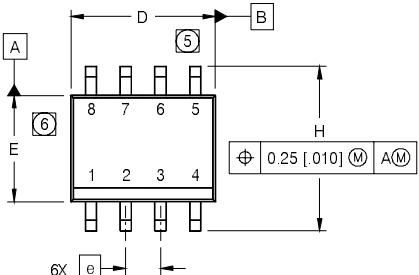


DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.0532	.0688	1.35	1.75
A1	.0040	.0098	0.10	0.25
b	.013	.020	0.33	0.51
c	.0075	.0098	0.19	0.25
D	.189	.1968	4.80	5.00
E	.1497	.1574	3.80	4.00
e	.050	BASIC	1.27	BASIC
e1	.025	BASIC	0.635	BASIC
H	.2284	.2440	5.80	6.20
K	.0099	.0196	0.25	0.50
L	.016	.050	0.40	1.27
y	0°	8°	0°	8°

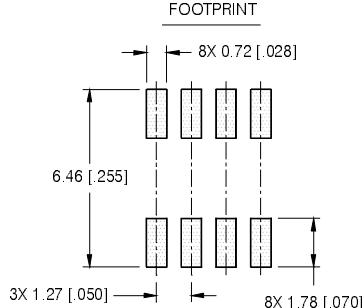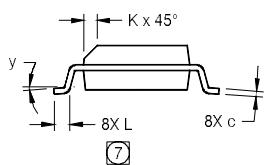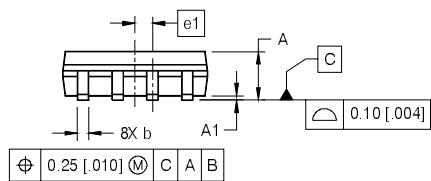

SO-8 Part Marking Information

EXAMPLE: THIS IS AN IRF7101 (MOSFET)

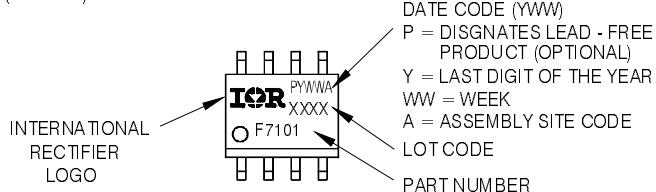


Note: For the most current drawing please refer to IR website at: <http://www.irf.com/package/>
www.irf.com

IRF9910PbF

SO-8 Tape and Reel


Dimensions are shown in millimeters (inches)

International
IR Rectifier

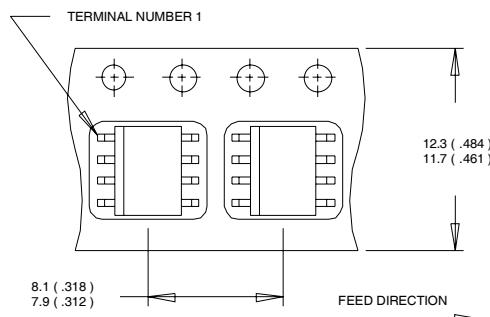

NOTES:

1. CONTROLLING DIMENSION : MILLIMETER.
2. ALL DIMENSIONS ARE SHOWN IN MILLIMETERS(INCHES).
3. OUTLINE CONFORMS TO EIA-481 & EIA-541.

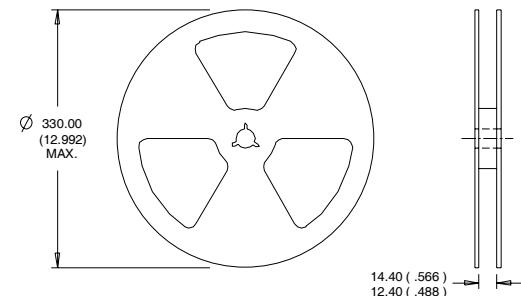

NOTES :

1. CONTROLLING DIMENSION : MILLIMETER.
2. OUTLINE CONFORMS TO EIA-481 & EIA-541.

Note: For the most current drawing please refer to IR website at: <http://www.irf.com/package/>

Notes:

- ① Repetitive rating; pulse width limited by max. junction temperature.
- ② Starting $T_J = 25^\circ\text{C}$, Q1: $L = 0.95\text{mH}$
 $R_G = 25\Omega$, $I_{AS} = 8.3\text{A}$; Q2: $L = 0.54\text{mH}$
 $R_G = 25\Omega$, $I_{AS} = 9.8\text{A}$.
- ③ Pulse width $\leq 400\mu\text{s}$; duty cycle $\leq 2\%$.
- ④ When mounted on 1 inch square copper board.
- ⑤ R_θ is measured at T_J approximately 90°C .

Data and specifications subject to change without notice.
This product has been designed and qualified for the Consumer market.
Qualifications Standards can be found on IR's Web site.

International
IR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105

TAC Fax: (310) 252-7903

Visit us at www.irf.com for sales contact information.07/2008

www.irf.com