



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




$V_{CES} = 1200V$
$I_C = 100A$ at $T_C = 80^\circ C$
$V_{CE(ON)} = 1.70V$ at $I_C = 100A$

**IGBT Half-Bridge  
POWIR 34™ Package**



**Applications:**

- Industrial Motor Drive
- Uninterruptible Power Supply
- Welding and Cutting Machine
- Switched Mode Power Supply
- Induction Heating
- AC Inverter Drive

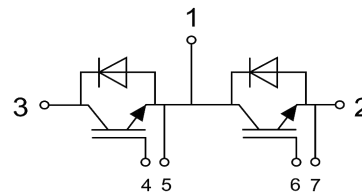

Features	Benefits
Low $V_{CE(ON)}$ and Switching Losses	High Efficiency in a Wide Range of Applications
100% RBSOA Tested	Rugged Transient Performance
<b>POWIR 34™</b> Package	Industry Standard
Lead Free	RoHS Compliant, Environmental Friendly

Base Part Number	Package Type	Standard Pack	Quantity	Orderable Part Number
IRG7U100HF12A	<b>POWIR 34™</b>	Box	80	IRG7U100HF12A

**Absolute Maximum Ratings of IGBT**

$V_{CES}$	Collector to Emitter Voltage	1200	V
$V_{GES}$	Continuous Gate to Emitter Voltage	±20	V
$I_C$	Continuous Collector Current	$T_C = 80^\circ C$	100 A
		$T_C = 25^\circ C$	200 A
$I_{CM}$	Pulse Collector Current	$T_J = 175^\circ C$	200 A
$P_D$	Maximum Power Dissipation (IGBT)	$T_C = 25^\circ C, T_J = 175^\circ C$	580 W
$T_J$	Maximum IGBT Junction Temperature	175	°C
$T_{JOP}$	Maximum Operating Junction Temperature Range	-40 to +150	°C
$T_{stg}$	Storage Temperature	-40 to +125	°C

**Electrical Characteristics of IGBT at  $T_J = 25^\circ\text{C}$  (Unless Otherwise Specified)**

Parameter		Min.	Typ.	Max.	Unit	Test Conditions	
$V_{(BR)CES}$	Collector to Emitter Breakdown Voltage	1200			V	$V_{GE} = 0V, I_C = 1mA$	
$V_{GE(th)}$	Gate Threshold Voltage	3.4	4.2	4.9	V	$I_C = 5mA, V_{CE} = V_{GE}$	
$V_{CE(ON)}$	Collector to Emitter Saturation Voltage		1.70	2.00	V	$T_J = 25^\circ\text{C}$	$I_C = 100A, V_{GE} = 15V$
			1.90		V	$T_J = 125^\circ\text{C}$	
$I_{CES}$	Collector to Emitter Leakage Current			1	mA	$V_{GE} = 0V, V_{CE} = V_{CES}$	
$I_{GES}$	Gate to Emitter Leakage Current			400	nA	$V_{GE} = \pm 20V, V_{CE} = 0V$	
$R_{Gint}$	Internal Gate Resistance		2.5		$\Omega$		

**Switching Characteristics of IGBT**

Parameter		Min.	Typ.	Max.	Unit	Test Conditions	
$t_{d(on)}$	Turn-on Delay Time		250		ns	$T_J = 25^\circ\text{C}$	$V_{CC}=600V, I_C = 100A, R_G = 33\Omega, V_{GE}=\pm 15V, \text{Inductive Load}$
			250			$T_J = 125^\circ\text{C}$	
$t_r$	Rise Time		125		ns	$T_J = 25^\circ\text{C}$	
			125			$T_J = 125^\circ\text{C}$	
$t_{d(off)}$	Turn-off Delay Time		600		ns	$T_J = 25^\circ\text{C}$	
			625			$T_J = 125^\circ\text{C}$	
$t_f$	Fall Time		165		ns	$T_J = 25^\circ\text{C}$	
			185			$T_J = 125^\circ\text{C}$	
$E_{on}$	Turn-on Switching Loss		15.5		mJ	$T_J = 25^\circ\text{C}$	
			16.3			$T_J = 125^\circ\text{C}$	
$E_{off}$	Turn-off Switching Loss		3.8		mJ	$T_J = 25^\circ\text{C}$	
			6.1			$T_J = 125^\circ\text{C}$	
$Q_g$	Total Gate Charge		685		nC	$T_J = 25^\circ\text{C}$	
$C_{ies}$	Input Capacitance		10.0		nF	$V_{CE} = 25V, V_{GE} = 0V, f = 1MHz, T_J = 25^\circ\text{C}$	
$C_{oes}$	Output Capacitance		0.54				
$C_{res}$	Reverse Transfer Capacitance		0.38				
RBSOA	Reverse Bias Safe Operating Area	Trapezoid				$I_C = 200A, V_{CC} = 960V, V_P = 1200V, R_G = 33\Omega, V_{GE} = +15V \text{ to } 0V, T_J = 150^\circ\text{C}$	

**Absolute Maximum Ratings of Freewheeling Diode**


$V_{RRM}$	Repetitive Peak Reverse Voltage	1200	V
$I_F$	Diode Continuous Forward Current, $T_C = 25^\circ\text{C}$	200	A
	Diode Continuous Forward Current, $T_C = 80^\circ\text{C}$	100	
$I_{FM}$	Pulse Diode Current	200	A

**Electrical and Switching Characteristics of Freewheeling Diode**


Parameter		Typ.	Max.	Unit	Test Conditions	
$V_F$	Forward Voltage	2.20	2.70	V	$T_J = 25^\circ\text{C}$	$I_F = 100\text{A}$ , $V_{GE} = 0\text{V}$
		2.40			$T_J = 125^\circ\text{C}$	
$I_{rr}$	Peak Reverse Recovery Current	40		A	$T_J = 25^\circ\text{C}$	$I_F = 100\text{A}$ , $di/dt = 940\text{A}/\mu\text{s}$ , $V_{rr} = 600\text{V}$ , $V_{GE} = -15\text{V}$
		60			$T_J = 125^\circ\text{C}$	
$Q_{rr}$	Reverse Recovery Charge	3.2		$\mu\text{C}$	$T_J = 25^\circ\text{C}$	
		7.6			$T_J = 125^\circ\text{C}$	
$E_{rec}$	Reverse Recovery Energy	0.8		mJ	$T_J = 25^\circ\text{C}$	
		2.3			$T_J = 125^\circ\text{C}$	

**Module Characteristics**


Parameter		Min.	Typ.	Max.	Unit
$V_{iso}$	Isolation Voltage (All Terminals Shorted), $f = 50\text{Hz}$ , 1minute			2500	V
$R_{\theta JC}$	Junction-to-Case (IGBT)		0.26		$^\circ\text{C}/\text{W}$
$R_{\theta JC}$	Junction-to-Case (Diode)		0.41		$^\circ\text{C}/\text{W}$
$R_{\theta CS}$	Case-To-Sink (Conductive Grease Applied)		0.1		$^\circ\text{C}/\text{W}$
M	Power Terminals Screw: M5	3.0		5.0	N·m
M	Mounting Screw: M6	4.0		6.0	N·m
G	Weight		165		g

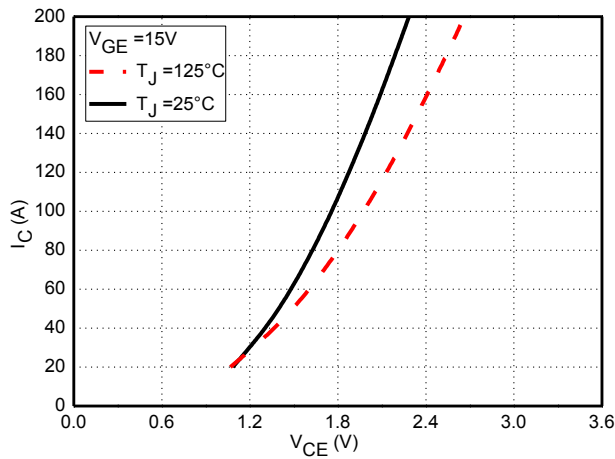


**Fig.1 Typical IGBT Saturation Characteristics**

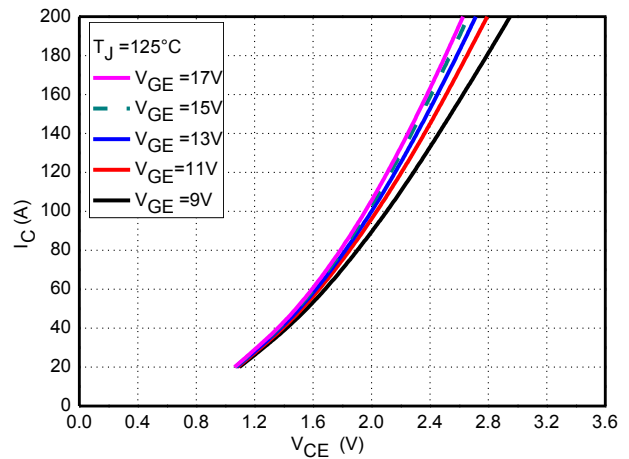


**Fig.2 Typical IGBT Output Characteristics**

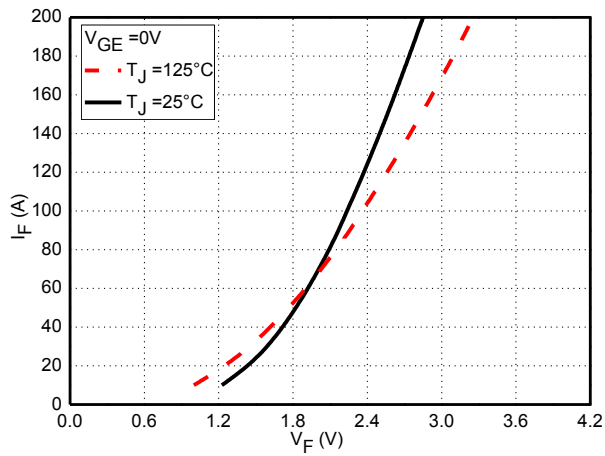


**Fig.3 Typical Diode Forward Characteristics**

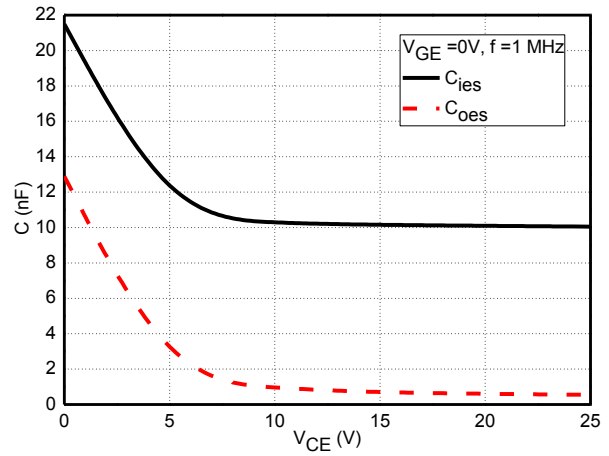


**Fig. 4 Typical Capacitance Characteristics**

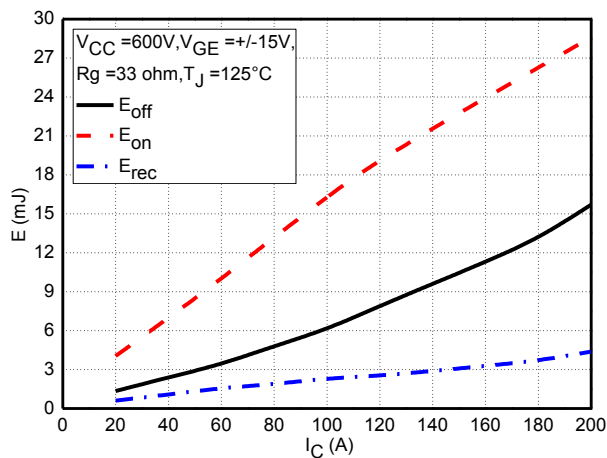


**Fig.5 Typical Switching Loss vs. Collector Current**

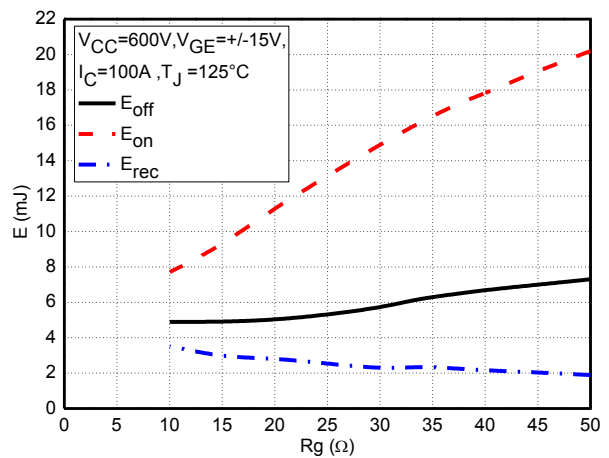


**Fig.6 Typical Switching Loss vs. Gate Resistance**

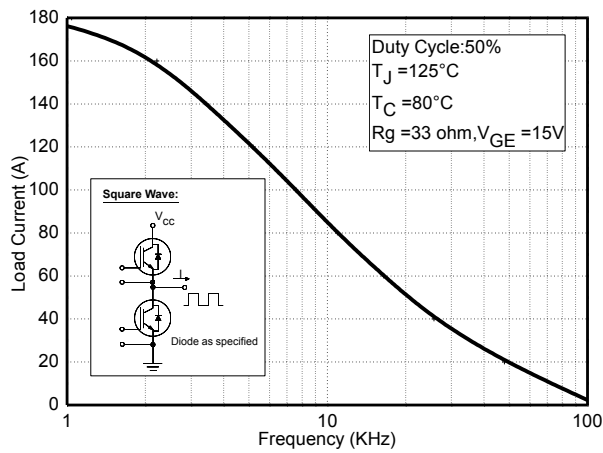


**Fig.7 Typical Load Current vs. Frequency**

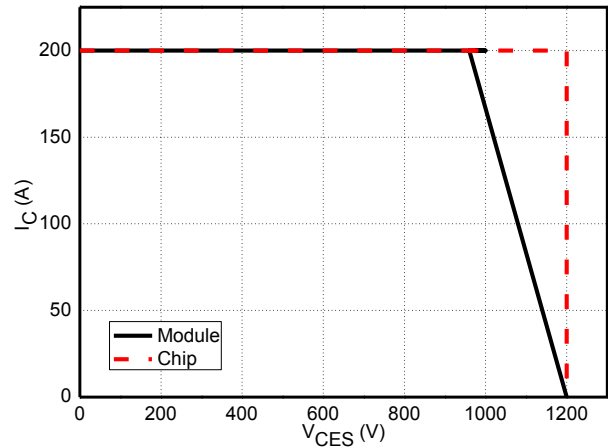

**Fig.8 Reverse Bias Safe Operation Area (RBSOA)**

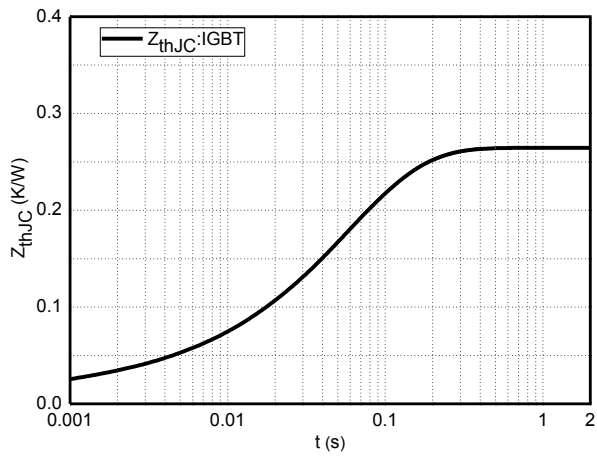


**Fig.9 Typical Transient Thermal Impedance (IGBT)**

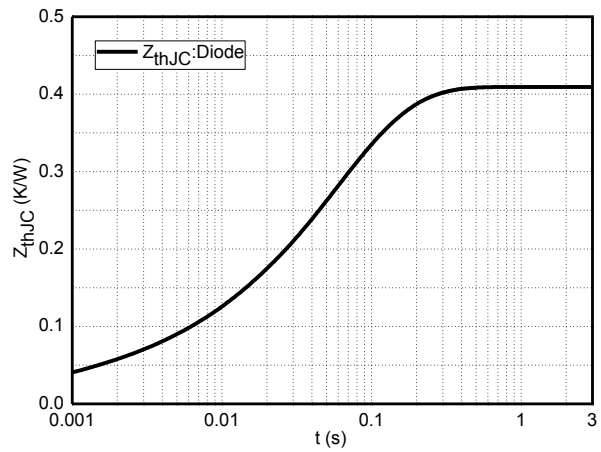


**Fig.10 Typical Transient Thermal Impedance (Diode)**

**Internal Circuit:**

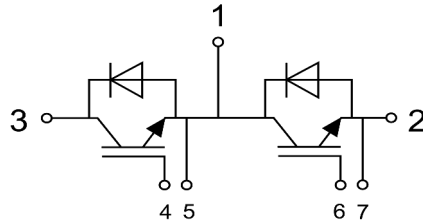

**Package Outline (Unit: mm):**

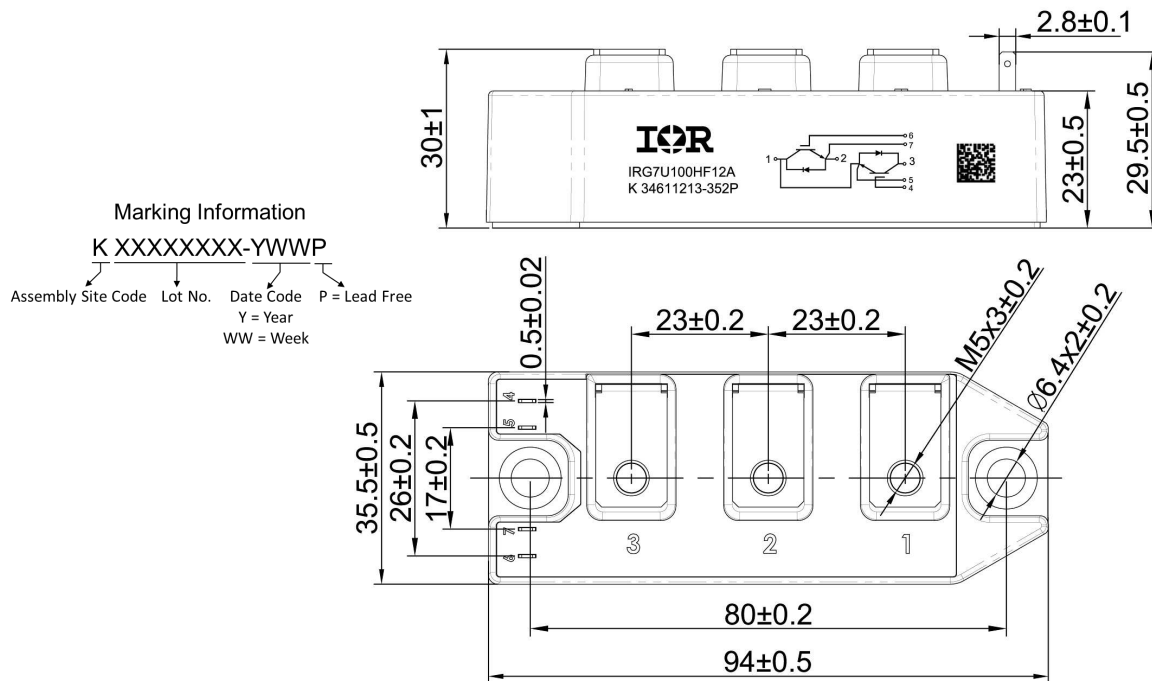

**Qualification Information†**

Qualification Level	Industrial
Moisture Sensitivity Level	Not Applicable
RoHS Compliant	Yes

† Qualification standards can be found at International Rectifier’s web site: <http://www.irf.com/product-info/reliability/>