



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

Micropower Voltage Reference

ISL21010

The [ISL21010](#) is a precision, low dropout micropower bandgap voltage reference in a space-saving SOT-23 package. It operates from a single 2.2V to 5.5V supply (minimum voltage is dependent on voltage option) and provides a $\pm 0.2\%$ accurate reference. The ISL21010 provides up to 25mA output current sourcing with low 150mV dropout voltage.

Output voltage options include 1.024V, 1.2V, 1.5V, 2.048V, 2.5V, 3.0V, 3.3V and 4.096V. The low supply current and low dropout voltage combined with high accuracy make the ISL21010 ideal for precision battery powered applications.

Applications

- Battery management/monitoring
- Low power standby voltages
- Portable instrumentation
- Consumer/medical electronics
- Lower cost industrial and instrumentation
- Power regulation circuits
- Control loops and compensation networks
- LED/diode supply

Features

- Reference output voltages 1.024V, 1.25V, 1.5V, 2.048V, 2.5V, 3.0V, 3.3V, 4.096V
- Precision 0.2% initial accuracy
- Input voltage range:
 - ISL21010-10, -12, -15 -20 2.2V to 5.5V
 - ISL21010-25 2.6V to 5.5V
 - ISL21010-30 3.1V to 5.5V
 - ISL21010-33 3.4V to 5.5V
 - ISL21010-41 4.2V to 5.5V
- Output current source capability 25mA
- Operating temperature range -40°C to +125°C
- Output voltage noise ($V_{OUT} = 2.048V$) 58 μ V_{P-P} (0.1Hz to 10Hz)
- Supply current 48 μ A (typ)
- Tempco 50ppm/°C
- Package 3 Ld SOT-23
- Pb-free (RoHS compliant)

Related Literature

[AN1819](#), "ISL21010XXEV1Z User Guide"

[AN1883](#), "Low-Side Low Cost Current Sense Amplifier"

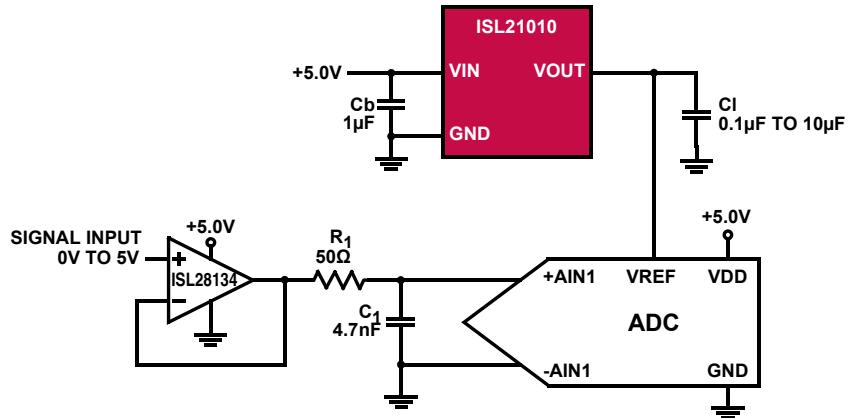



FIGURE 1. TYPICAL APPLICATION DIAGRAM

Table of Contents

Pin Configuration.....	3
Pin Descriptions.....	3
Ordering Information	3
Absolute Maximum Ratings.....	4
Thermal Information	4
Recommended Operating Conditions	4
Electrical Specifications (ISL21010-10, V_{OUT} = 1.024V)	4
Electrical Specifications (ISL21010-12, V_{OUT} = 1.25V)	5
Electrical Specifications (ISL21010-15, V_{OUT} = 1.5V).....	5
Electrical Specifications (ISL21010-20, V_{OUT} = 2.048V)	6
Electrical Specifications (ISL21010-25, V_{OUT} = 2.5V).....	6
Electrical Specifications (ISL21010-30, V_{OUT} = 3.0V)	7
Electrical Specifications (ISL21010-33, V_{OUT} = 3.3V)	7
Electrical Specifications (ISL21010-41, V_{OUT} = 4.096V)	8
Typical Performance Characteristics Curves (V_{OUT} = 1.024V).....	9
Typical Performance Characteristics Curves (V_{OUT} = 1.25V)	12
Typical Performance Characteristics Curves (V_{OUT} = 1.5V)	15
Typical Performance Characteristics Curves (V_{OUT} = 2.048V)	18
Typical Performance Characteristics Curves (V_{OUT} = 2.5V)	21
Typical Performance Characteristics Curves (V_{OUT} = 3.0V)	24
Typical Performance Characteristics Curves (V_{OUT} = 3.3V)	27
Typical Performance Characteristics Curves (V_{OUT} = 4.096V)	30
Applications Information	33
Micropower Operation.....	33
Board Mounting Considerations	33
Board Assembly Considerations	33
Noise Performance and Reduction	33
Typical Application Circuit	33
Revision History.....	34
About Intersil	34
Package Outline Drawing.....	35

Pin Configuration**Pin Descriptions**

PIN NUMBER	PIN NAME	DESCRIPTION
1	V _{IN}	Input Voltage Connection
2	V _{OUT}	Voltage Reference Output
3	GND	Ground Connection

Ordering Information

PART NUMBER <small>(Notes 1, 2, 3, 4)</small>	PART MARKING	TAPE & REEL QUANTITY (UNITS)	V _{OUT} OPTION (V)	INITIAL ACCURACY (%)	TEMP. RANGE (°C)	PACKAGE (RoHS Compliant)	PKG. DWG. #
ISL21010DFH310Z-TK	BEBA	1k	1.024	±0.2	-40 to +125	3 Ld SOT-23	P3.064
ISL21010DFH310Z-T7A	BEBA	250	1.024	±0.2	-40 to +125	3 Ld SOT-23	P3.064
ISL21010DFH312Z-TK	BECA	1k	1.25	±0.2	-40 to +125	3 Ld SOT-23	P3.064
ISL21010DFH312Z-T7A	BECA	250	1.25	±0.2	-40 to +125	3 Ld SOT-23	P3.064
ISL21010CFH315Z-TK	BDRA	1k	1.5	±0.2	-40 to +125	3 Ld SOT-23	P3.064
ISL21010CFH315Z-T7A	BDRA	250	1.5	±0.2	-40 to +125	3 Ld SOT-23	P3.064
ISL21010CFH320Z-TK	BDSA	1k	2.048	±0.2	-40 to +125	3 Ld SOT-23	P3.064
ISL21010CFH320Z-T7A	BDSA	250	2.048	±0.2	-40 to +125	3 Ld SOT-23	P3.064
ISL21010CFH325Z-TK	BDTA	1k	2.5	±0.2	-40 to +125	3 Ld SOT-23	P3.064
ISL21010CFH325Z-T7A	BDTA	250	2.5	±0.2	-40 to +125	3 Ld SOT-23	P3.064
ISL21010CFH330Z-TK	BDVA	1k	3.0	±0.2	-40 to +125	3 Ld SOT-23	P3.064
ISL21010CFH330Z-T7A	BDVA	250	3.0	±0.2	-40 to +125	3 Ld SOT-23	P3.064
ISL21010CFH333Z-TK	BDWA	1k	3.3	±0.2	-40 to +125	3 Ld SOT-23	P3.064
ISL21010CFH333Z-T7A	BDWA	250	3.3	±0.2	-40 to +125	3 Ld SOT-23	P3.064
ISL21010CFH341Z-TK	BDYA	1k	4.096	±0.2	-40 to +125	3 Ld SOT-23	P3.064
ISL21010CFH341Z-T7A	BDYA	250	4.096	±0.2	-40 to +125	3 Ld SOT-23	P3.064

NOTES:

1. Please refer to [TB347](#) for details on reel specifications.
2. These Intersil Pb-free plastic packaged products employ special Pb-free material sets, molding compounds/die attach materials, and 100% matte tin plate plus anneal (e3 termination finish, which is RoHS compliant and compatible with both SnPb and Pb-free soldering operations). Intersil Pb-free products are MSL classified at Pb-free peak reflow temperatures that meet or exceed the Pb-free requirements of IPC/JEDEC J STD-020.
3. For Moisture Sensitivity Level (MSL), please see device information page for [ISL21010](#). For more information on MSL please see Tech Brief [TB363](#).
4. The part marking is located on the bottom of the part.

Absolute Maximum Ratings

Max Voltage	
V _{IN} to GND	-0.5V to +6.5V
V _{OUT} (pin) to GND (10s).....	-0.5V to V _{IN} +0.5V
Input Voltage Slew Rate (Max).....	.1V/µs
Temperature Range (Industrial)	-40°C to +125°C
ESD Rating	
Human Body Model	5.5kV
Machine Model	300V
Charged Device Model.....	2kV

Thermal Information

Thermal Resistance (Typical)	θ _{JA} (°C/W)	θ _{JC} (°C/W)
3 Ld SOT-23 Package (Notes 5, 6).....	275	110
Continuous Power Dissipation (T _A = +125°C)99mW	
Storage Temperature Range.....	-65°C to +150°C	
Pb-Free Reflow Profile		see TB493

Recommended Operating Conditions

Temperature	-40°C to +125°C
Supply Voltage	
V _{OUT} = 1.024V, 1.25V, 1.5V, 2.048V	2.2V to 5.5V
V _{OUT} = 2.5V.....	2.6V to 5.5V
V _{OUT} = 3.0V.....	3.1V to 5.5V
V _{OUT} = 3.3V.....	3.4V to 5.5V
V _{OUT} = 4.096V	4.2V to 5.5V

CAUTION: Do not operate at or near the maximum ratings listed for extended periods of time. Exposure to such conditions may adversely impact product reliability and result in failures not covered by warranty.

NOTES:

5. θ_{JA} is measured with the component mounted on a high effective thermal conductivity test board in free air. See Tech Brief [TB379](#) for details.
6. For θ_{JC}, the “case temp” location is taken at the package top center.
7. Post-reflow drift for the ISL21010 devices may shift up to 4.0mV based on simulated reflow at 260°C peak temperature, three passes. The system design engineer must take this into account when considering the reference voltage after assembly.

Electrical Specifications (ISL21010-10, V_{OUT} = 1.024V) V_{IN} = 3.0V, T_A = +25°C, I_{OUT} = 0A, unless otherwise specified. Boldface limits apply across the operating temperature range, -40°C to +125°C.

PARAMETER	DESCRIPTION	TEST CONDITIONS	MIN (Note 8)	TYP	MAX (Note 8)	UNIT
V _{OUT}	Output Voltage		1.024		V	
V _{OA}	V _{OUT} Accuracy at T _A = +25°C (Note 7)		-0.2		+0.2	%
TC V _{OUT}	Output Voltage Temperature Coefficient (Note 9)		15	50	ppm/°C	
V _{IN}	Input Voltage Range		2.2		5.5	V
I _{IN}	Supply Current	T _A = +25°C		46	80	µA
		T _A = -40°C to +125°C		60	100	µA
ΔV _{OUT} /ΔV _{IN}	Line Regulation	2.2 V ≤ V _{IN} ≤ 5.5V		5	100	µV/V
ΔV _{OUT} /ΔI _{OUT}	Load Regulation	Sourcing: 0mA ≤ I _{OUT} ≤ 25mA		15	110	µV/mA
		Sinking: -1mA ≤ I _{OUT} ≤ 0mA		17		µV/mA
I _{SC}	Short-Circuit Current	T _A = +25°C, V _{OUT} tied to GND		118		mA
t _R	Turn-On Settling Time	V _{OUT} = ±0.1%, C _{OUT} = 1µF		300		µs
	Ripple Rejection	f = 120Hz		70		dB
e _N	Output Voltage Noise	0.1Hz ≤ f ≤ 10Hz		24		µV _{P-P}
V _N	Broadband Voltage Noise	10Hz ≤ f ≤ 1kHz		14		µV _{RMS}
ΔV _{OUT} /ΔT _A	Thermal Hysteresis (Note 11)	ΔT _A = +165°C		100		ppm
ΔV _{OUT} /Δt	Long Term Stability	1000 hours, T _A = +25°C		110		ppm

ISL21010

Electrical Specifications (ISL21010-12, V_{OUT} = 1.25V) V_{IN} = 3.0V, T_A = +25°C, I_{OUT} = 0A, unless otherwise specified.
Boldface limits apply across the operating temperature range, -40°C to +125°C.

PARAMETER	DESCRIPTION	TEST CONDITIONS	MIN (Note 8)	TYP	MAX (Note 8)	UNIT
V _{OUT}	Output Voltage			1.25		V
V _{OA}	V _{OUT} Accuracy at T _A = +25°C (Note 7)		-0.2		+0.2	%
TC V _{OUT}	Output Voltage Temperature Coefficient (Note 9)			15	50	ppm/°C
V _{IN}	Input Voltage Range		2.2		5.5	V
I _{IN}	Supply Current	T _A = +25°C		46	80	µA
		T _A = -40°C to +125°C			100	µA
ΔV _{OUT} /ΔV _{IN}	Line Regulation	2.2 V ≤ V _{IN} ≤ 5.5V		1	100	µV/V
ΔV _{OUT} /ΔI _{OUT}	Load Regulation	Sourcing: 0mA ≤ I _{OUT} ≤ 25mA		35	110	µV/mA
		Sinking: -1mA ≤ I _{OUT} ≤ 0mA		50		µV/mA
I _{SC}	Short-Circuit Current	T _A = +25°C, V _{OUT} tied to GND		118		mA
t _R	Turn-On Settling Time	V _{OUT} = ±0.1%, C _{OUT} = 1µF		300		µs
	Ripple Rejection	f = 120Hz		68		dB
e _N	Output Voltage Noise	0.1Hz ≤ f ≤ 10Hz		27		µV _{P-P}
V _N	Broadband Voltage Noise	10Hz ≤ f ≤ 1kHz		17		µV _{RMS}
ΔV _{OUT} /ΔT _A	Thermal Hysteresis (Note 11)	ΔT _A = +165°C		100		ppm
ΔV _{OUT} /Δt	Long Term Stability	1000 hours, T _A = +25°C		110		ppm

Electrical Specifications (ISL21010-15, V_{OUT} = 1.5V) V_{IN} = 3.0V, T_A = +25°C, I_{OUT} = 0A, unless otherwise specified.
Boldface limits apply across the operating temperature range, -40°C to +125°C.

PARAMETER	DESCRIPTION	TEST CONDITIONS	MIN (Note 8)	TYP	MAX (Note 8)	UNIT
V _{OUT}	Output Voltage			1.5		V
V _{OA}	V _{OUT} Accuracy at T _A = +25°C (Note 7)		-0.2		+0.2	%
TC V _{OUT}	Output Voltage Temperature Coefficient (Note 9)			15	50	ppm/°C
V _{IN}	Input Voltage Range		2.2		5.5	V
I _{IN}	Supply Current	T _A = +25°C		46	80	µA
		T _A = -40°C to +125°C			100	µA
ΔV _{OUT} /ΔV _{IN}	Line Regulation	2.2 V ≤ V _{IN} ≤ 5.5V		9	100	µV/V
ΔV _{OUT} /ΔI _{OUT}	Load Regulation	Sourcing: 0mA ≤ I _{OUT} ≤ 25mA		37	110	µV/mA
		Sinking: -1mA ≤ I _{OUT} ≤ 0mA		50		µV/mA
I _{SC}	Short-Circuit Current	T _A = +25°C, V _{OUT} tied to GND		118		mA
t _R	Turn-On Settling Time	V _{OUT} = ±0.1%, C _{OUT} = 1µF		300		µs
	Ripple Rejection	f = 120Hz		66		dB
e _N	Output Voltage Noise	0.1Hz ≤ f ≤ 10Hz		35		µV _{P-P}
V _N	Broadband Voltage Noise	10Hz ≤ f ≤ 1kHz		20		µV _{RMS}
ΔV _{OUT} /ΔT _A	Thermal Hysteresis (Note 11)	ΔT _A = +165°C		100		ppm
ΔV _{OUT} /Δt	Long Term Stability	1000 hours, T _A = +25°C		110		ppm

ISL21010

Electrical Specifications (ISL21010-20, $V_{OUT} = 2.048V$) $V_{IN} = 3.0V$, $T_A = +25^\circ C$, $I_{OUT} = 0A$, unless otherwise specified. Boldface limits apply across the operating temperature range, $-40^\circ C$ to $+125^\circ C$.

PARAMETER	DESCRIPTION	TEST CONDITIONS	MIN (Note 8)	TYP	MAX (Note 8)	UNIT
V_{OUT}	Output Voltage			2.048		V
V_{OA}	V_{OUT} Accuracy at $T_A = +25^\circ C$ (Note 7)		-0.2		+0.2	%
$TC\ V_{OUT}$	Output Voltage Temperature Coefficient (Note 9)			15	50	ppm/ $^\circ C$
V_{IN}	Input Voltage Range			2.2	5.5	V
I_{IN}	Supply Current	$T_A = +25^\circ C$		46	80	μA
		$T_A = -40^\circ C$ to $+125^\circ C$			100	μA
$\Delta V_{OUT}/\Delta V_{IN}$	Line Regulation	$2.2\ V \leq V_{IN} \leq 5.5V$		37	130	$\mu V/V$
$\Delta V_{OUT}/\Delta I_{OUT}$	Load Regulation	Sourcing: $0mA \leq I_{OUT} \leq 25mA$		18	110	$\mu V/mA$
		Sinking: $-1mA \leq I_{OUT} \leq 0mA$		10		$\mu V/mA$
I_{SC}	Short-Circuit Current	$T_A = +25^\circ C$, V_{OUT} tied to GND		118		mA
t_R	Turn-On Settling Time	$V_{OUT} = \pm 0.1\%$, $C_{OUT} = 1\mu F$		300		μs
	Ripple Rejection	$f = 120Hz$		66		dB
e_N	Output Voltage Noise	$0.1Hz \leq f \leq 10Hz$		58		μV_{P-P}
V_N	Broadband Voltage Noise	$10Hz \leq f \leq 1kHz$		26		μV_{RMS}
$\Delta V_{OUT}/\Delta T_A$	Thermal Hysteresis (Note 11)	$\Delta T_A = +165^\circ C$		100		ppm
$\Delta V_{OUT}/\Delta t$	Long Term Stability	1000 hours, $T_A = +25^\circ C$		50		ppm

Electrical Specifications (ISL21010-25, $V_{OUT} = 2.5V$) $V_{IN} = 3.0V$, $T_A = +25^\circ C$, $I_{OUT} = 0A$, unless otherwise specified. Boldface limits apply across the operating temperature range, $-40^\circ C$ to $+125^\circ C$.

PARAMETER	DESCRIPTION	TEST CONDITIONS	MIN (Note 8)	TYP	MAX (Note 8)	UNIT
V_{OUT}	Output Voltage			2.5		V
V_{OA}	V_{OUT} Accuracy at $T_A = +25^\circ C$ (Note 7)		-0.2		+0.2	%
$TC\ V_{OUT}$	Output Voltage Temperature Coefficient (Note 9)			15	50	ppm/ $^\circ C$
V_{IN}	Input Voltage Range		2.6	5.5	V	
I_{IN}	Supply Current	$T_A = +25^\circ C$		46	80	μA
		$T_A = -40^\circ C$ to $+125^\circ C$			100	μA
$\Delta V_{OUT}/\Delta V_{IN}$	Line Regulation	$2.6\ V \leq V_{IN} \leq 5.5V$		62	245	$\mu V/V$
$\Delta V_{OUT}/\Delta I_{OUT}$	Load Regulation	Sourcing: $0mA \leq I_{OUT} \leq 25mA$		29	110	$\mu V/mA$
		Sinking: $-1mA \leq I_{OUT} \leq 0mA$		50		$\mu V/mA$
V_{INDO}	Dropout Voltage (Note 10)	$I_{OUT} = 10mA$		60	150	mV
I_{SC}	Short-Circuit Current	$T_A = +25^\circ C$, V_{OUT} tied to GND		118		mA
t_R	Turn-On Settling Time	$V_{OUT} = \pm 0.1\%$, $C_{OUT} = 1\mu F$		300		μs
	Ripple Rejection	$f = 120Hz$		62		dB
e_N	Output Voltage Noise	$0.1Hz \leq f \leq 10Hz$		67		μV_{P-P}
V_N	Broadband Voltage Noise	$10Hz \leq f \leq 1kHz$		37		μV_{RMS}
$\Delta V_{OUT}/\Delta T_A$	Thermal Hysteresis (Note 11)	$\Delta T_A = +165^\circ C$		100		ppm
$\Delta V_{OUT}/\Delta t$	Long Term Stability	1000 hours, $T_A = +25^\circ C$		110		ppm

ISL21010

Electrical Specifications (ISL21010-30, V_{OUT} = 3.0V) V_{IN} = 5.0V, T_A = +25°C, I_{OUT} = 0A, unless otherwise specified.
Boldface limits apply across the operating temperature range, -40°C to +125°C.

PARAMETER	DESCRIPTION	TEST CONDITIONS	MIN (Note 8)	TYP	MAX (Note 8)	UNIT
V _{OUT}	Output Voltage		3.0		V	
V _{OA}	V _{OUT} Accuracy at T _A = +25°C (Note 7)		-0.2		+0.2	%
TC V _{OUT}	Output Voltage Temperature Coefficient (Note 9)		15	50	ppm/°C	
V _{IN}	Input Voltage Range		3.1	5.5	V	
I _{IN}	Supply Current	T _A = +25°C	48	80	μA	
		T _A = -40°C to +125°C		100	μA	
ΔV _{OUT} /ΔV _{IN}	Line Regulation	3.1V ≤ V _{IN} ≤ 5.5V	73	230	μV/V	
ΔV _{OUT} /ΔI _{OUT}	Load Regulation	Sourcing: 0mA ≤ I _{OUT} ≤ 25mA	48	110	μV/mA	
		Sinking: -1mA ≤ I _{OUT} ≤ 0mA	10		μV/mA	
V _{INDO}	Dropout Voltage (Note 10)	I _{OUT} = 10mA	60	150	mV	
I _{SC}	Short-Circuit Current	T _A = +25°C, V _{OUT} tied to GND	126		mA	
t _R	Turn-On Settling Time	V _{OUT} = ±0.1%, C _{OUT} = 1μF	300		μs	
	Ripple Rejection	f = 120Hz	62		dB	
e _N	Output Voltage Noise	0.1Hz ≤ f ≤ 10Hz	86		μV _{P-P}	
V _N	Broadband Voltage Noise	10Hz ≤ f ≤ 1kHz	36		μV _{RMS}	
ΔV _{OUT} /ΔT _A	Thermal Hysteresis (Note 11)	ΔT _A = +165°C	100		ppm	
ΔV _{OUT} /Δt	Long Term Stability	1000 hours, T _A = +25°C	50		ppm	

Electrical Specifications (ISL21010-33, V_{OUT} = 3.3V) V_{IN} = 5.0V, T_A = +25°C, I_{OUT} = 0A, unless otherwise specified.
Boldface limits apply across the operating temperature range, -40°C to +125°C.

PARAMETER	DESCRIPTION	TEST CONDITIONS	MIN (Note 8)	TYP	MAX (Note 8)	UNIT
V _{OUT}	Output Voltage		3.3		V	
V _{OA}	V _{OUT} Accuracy at T _A = +25°C (Note 7)		-0.2		+0.2	%
TC V _{OUT}	Output Voltage Temperature Coefficient (Note 9)		15	50	ppm/°C	
V _{IN}	Input Voltage Range		3.4	5.5	V	
I _{IN}	Supply Current	T _A = +25°C	48	80	μA	
		T _A = -40°C to +125°C		100	μA	
ΔV _{OUT} /ΔV _{IN}	Line Regulation	3.4V ≤ V _{IN} ≤ 5.5V	80	320	μV/V	
ΔV _{OUT} /ΔI _{OUT}	Load Regulation	Sourcing: 0mA ≤ I _{OUT} ≤ 25mA	45	110	μV/mA	
		Sinking: -1mA ≤ I _{OUT} ≤ 0mA	10		μV/mA	
V _{INDO}	Dropout Voltage (Note 10)	I _{OUT} = 10mA	60	150	mV	
I _{SC}	Short-Circuit Current	T _A = +25°C, V _{OUT} tied to GND	126		mA	
t _R	Turn-On Settling Time	V _{OUT} = ±0.1%, C _{OUT} = 1μF	300		μs	
	Ripple Rejection	f = 120Hz	61		dB	
e _N	Output Voltage Noise	0.1Hz ≤ f ≤ 10Hz	95		μV _{P-P}	
V _N	Broadband Voltage Noise	10Hz ≤ f ≤ 1kHz	40		μV _{RMS}	
ΔV _{OUT} /ΔT _A	Thermal Hysteresis (Note 11)	ΔT _A = +165°C	100		ppm	
ΔV _{OUT} /Δt	Long Term Stability	1000 hours, T _A = +25°C	50		ppm	

ISL21010

Electrical Specifications (ISL21010-41, $V_{OUT} = 4.096V$) $V_{IN} = 5.0V$, $T_A = +25^\circ C$, $I_{OUT} = 0A$, unless otherwise specified. Boldface limits apply across the operating temperature range, $-40^\circ C$ to $+125^\circ C$.

PARAMETER	DESCRIPTION	TEST CONDITIONS	MIN (Note 8)	TYP	MAX (Note 8)	UNIT
V_{OUT}	Output Voltage		4.096		V	
V_{OA}	V_{OUT} Accuracy at $T_A = +25^\circ C$ (Note 7)		-0.2		+0.2	%
TC V_{OUT}	Output Voltage Temperature Coefficient (Note 9)		15	50	ppm/ $^\circ C$	
V_{IN}	Input Voltage Range		4.2		5.5	V
I_{IN}	Supply Current	$T_A = +25^\circ C$	48	80	100	μA
		$T_A = -40^\circ C$ to $+125^\circ C$			140	μA
$\Delta V_{OUT}/\Delta V_{IN}$	Line Regulation	$4.2 V \leq V_{IN} \leq 5.5V$	106	550	$\mu V/V$	
$\Delta V_{OUT}/\Delta I_{OUT}$	Load Regulation	Sourcing: $0mA \leq I_{OUT} \leq 25mA$	50	140	$\mu V/mA$	
		Sinking: $-1mA \leq I_{OUT} \leq 0mA$	50		$\mu V/mA$	
V_{INDO}	Dropout Voltage (Note 10)	$I_{OUT} = 10mA$	60	150	mV	
I_{SC}	Short-Circuit Current	$T_A = +25^\circ C$, V_{OUT} tied to GND	126		mA	
t_R	Turn-On Settling Time	$V_{OUT} = \pm 0.1%$, $C_{OUT} = 1\mu F$	300		μs	
	Ripple Rejection	$f = 120Hz$	58		dB	
e_N	Output Voltage Noise	$0.1Hz \leq f \leq 10Hz$	112		μV_{P-P}	
V_N	Broadband Voltage Noise	$10Hz \leq f \leq 1kHz$	56		μV_{RMS}	
$\Delta V_{OUT}/\Delta T_A$	Thermal Hysteresis (Note 11)	$\Delta T_A = +165^\circ C$	100		ppm	
$\Delta V_{OUT}/\Delta t$	Long Term Stability	1000 hours, $T_A = +25^\circ C$	110		ppm	

NOTES:

8. Compliance to datasheet limits is assured by one or more methods: production test, characterization and/or design.
9. Over the specified temperature range. Temperature coefficient is measured by the box method whereby the change in V_{OUT} is divided by the temperature range; in this case, $-40^\circ C$ to $+125^\circ C = +165^\circ C$.
10. Dropout Voltage is the minimum $V_{IN} - V_{OUT}$ differential voltage measured at the point where V_{OUT} drops 1mV from V_{IN} = nominal at $T_A = +25^\circ C$.
11. Thermal Hysteresis is the change of V_{OUT} measured at $T_A = +25^\circ C$ after temperature cycling over a specified range, ΔT_A . V_{OUT} is read initially at $T_A = +25^\circ C$ for the device under test. The device is temperature cycled and a second V_{OUT} measurement is taken at $+25^\circ C$. The difference between the initial V_{OUT} reading and the second V_{OUT} reading is then expressed in ppm. For $\Delta T_A = +165^\circ C$, the device under test is cycled from $+25^\circ C$ to $-40^\circ C$ to $+125^\circ C$ to $+25^\circ C$.

Typical Performance Characteristics Curves ($V_{OUT} = 1.024V$)

$I_{OUT} = 0mA$, $T_A = +25^\circ C$ unless otherwise specified.

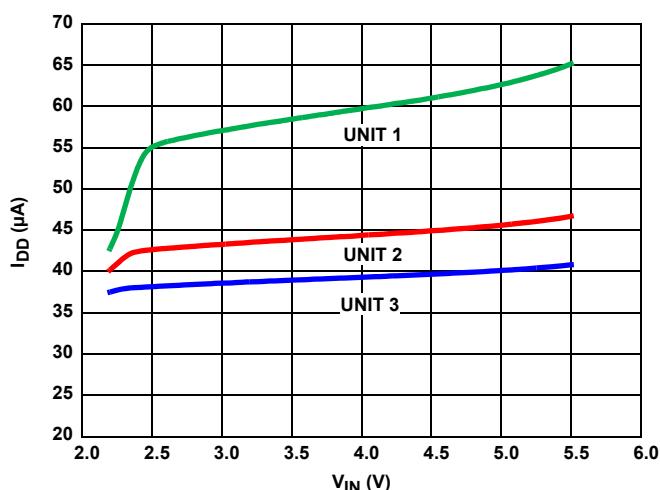


FIGURE 2. I_{IN} vs V_{IN} , THREE UNITS

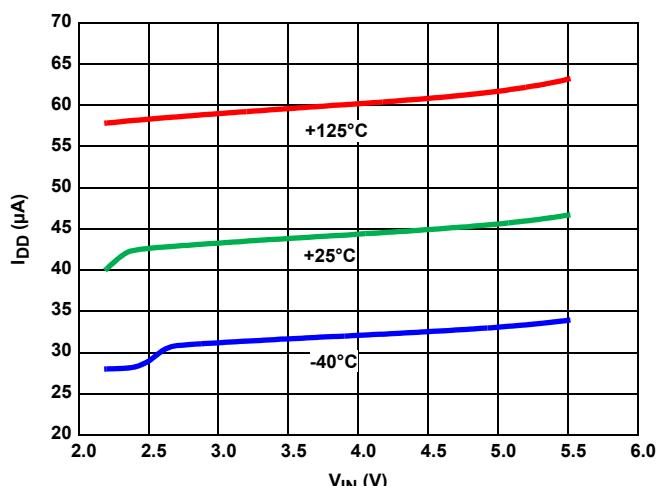


FIGURE 3. I_{IN} vs V_{IN} , OVER-TEMPERATURE

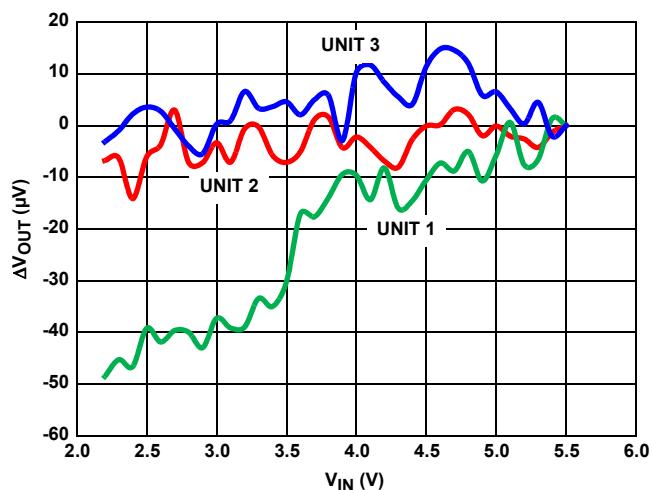


FIGURE 4. LINE REGULATION, THREE UNITS

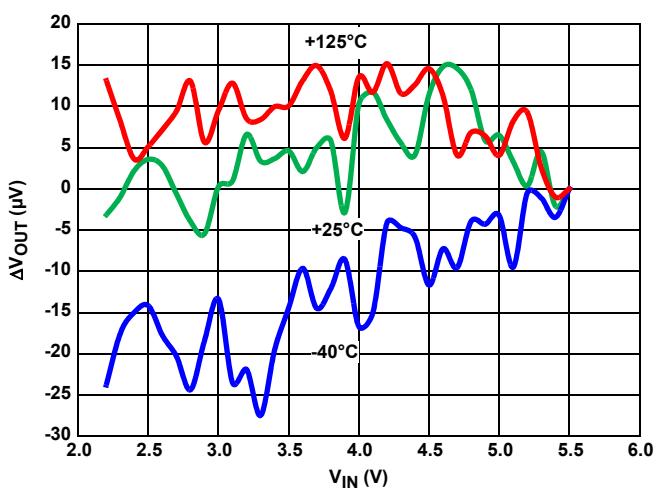


FIGURE 5. LINE REGULATION OVER-TEMPERATURE

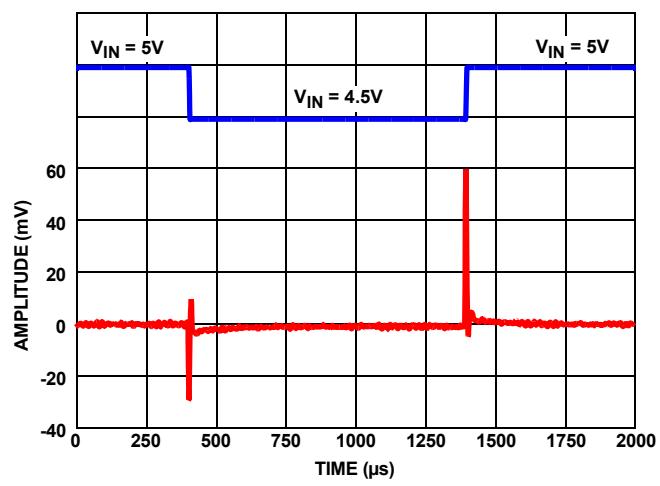


FIGURE 6. LINE TRANSIENT RESPONSE WITH $0.22\mu F$ LOAD

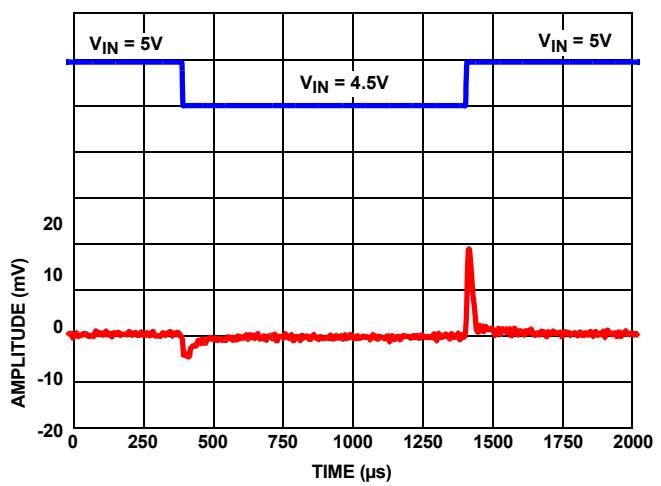


FIGURE 7. LINE TRANSIENT RESPONSE WITH $10\mu F$ LOAD

Typical Performance Characteristics Curves ($V_{OUT} = 1.024V$)

$I_{OUT} = 0mA$, $T_A = +25^\circ C$ unless otherwise specified. (Continued)

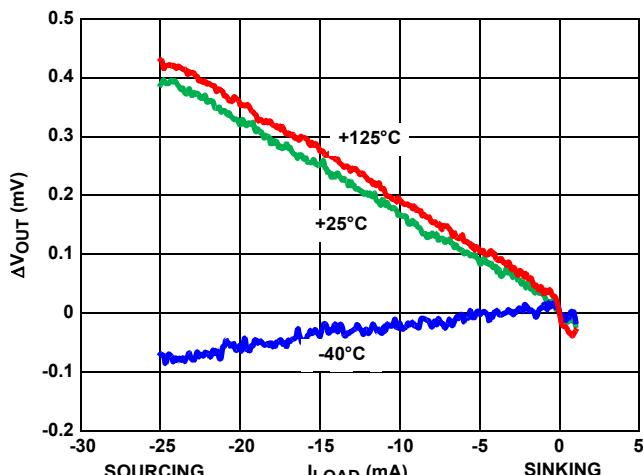


FIGURE 8. LOAD REGULATION OVER-TEMPERATURE

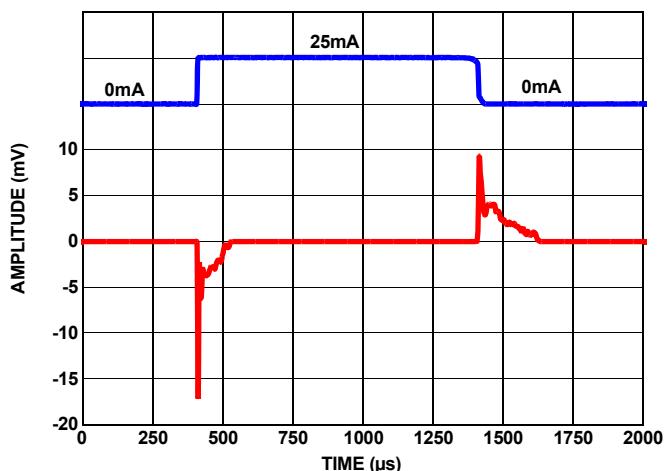


FIGURE 9. LOAD TRANSIENT RESPONSE AT 25mA LOAD AT 1μF

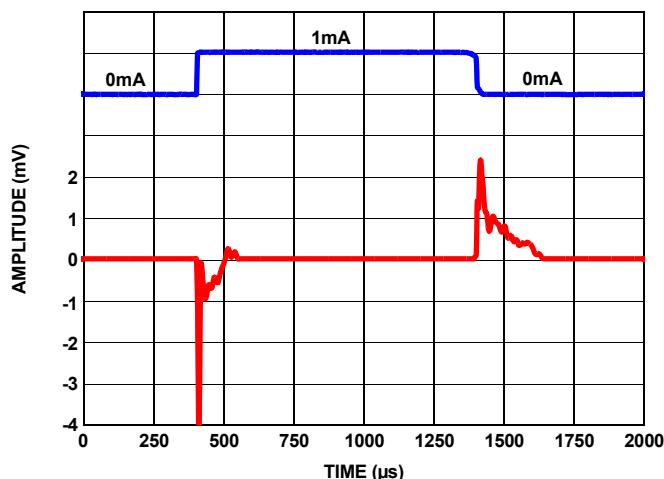


FIGURE 10. LOAD TRANSIENT RESPONSE AT 1mA LOAD AT 1μF

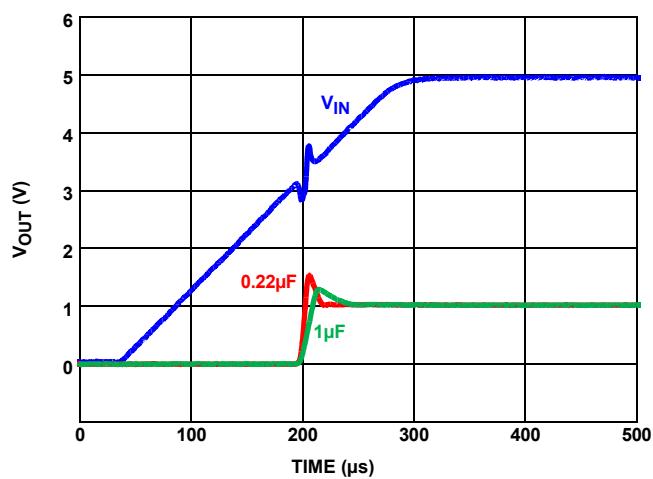


FIGURE 11. TURN-ON TIME

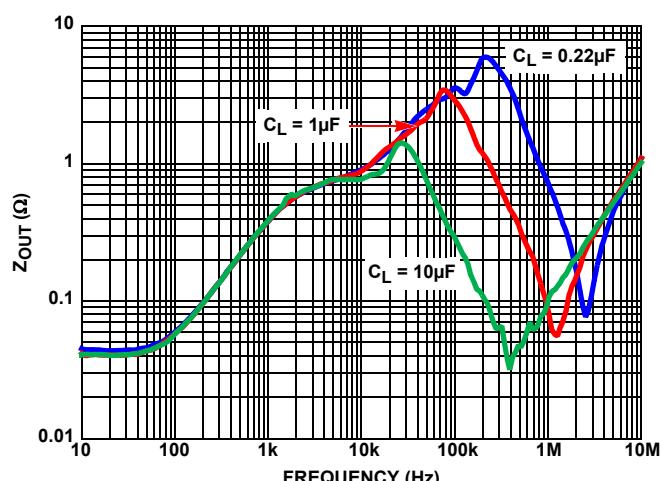


FIGURE 12. Z_{OUT} VS FREQUENCY

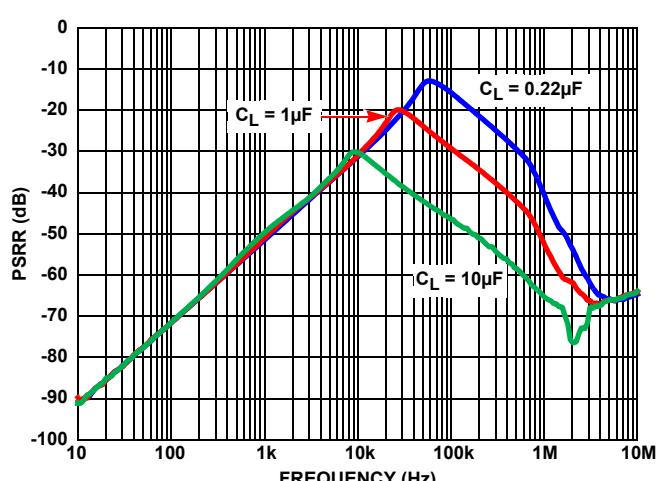


FIGURE 13. RIPPLE REJECTION AT DIFFERENT CAPACITIVE LOADS

Typical Performance Characteristics Curves ($V_{OUT} = 1.024V$)

$I_{OUT} = 0mA$, $T_A = +25^\circ C$ unless otherwise specified. (Continued)

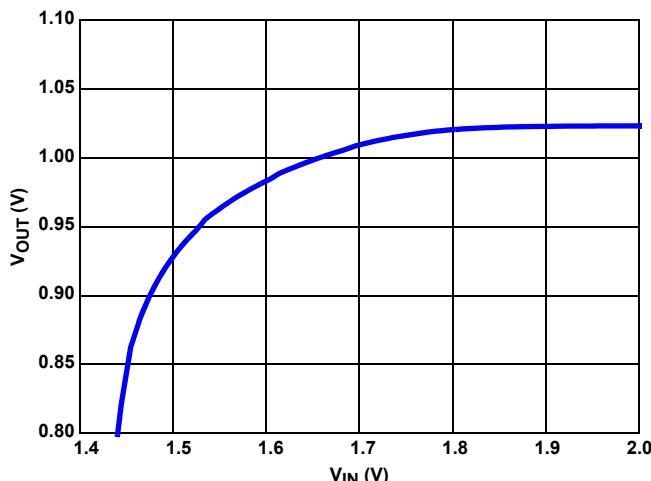


FIGURE 14. DROPOUT (10mA SOURCED LOAD)

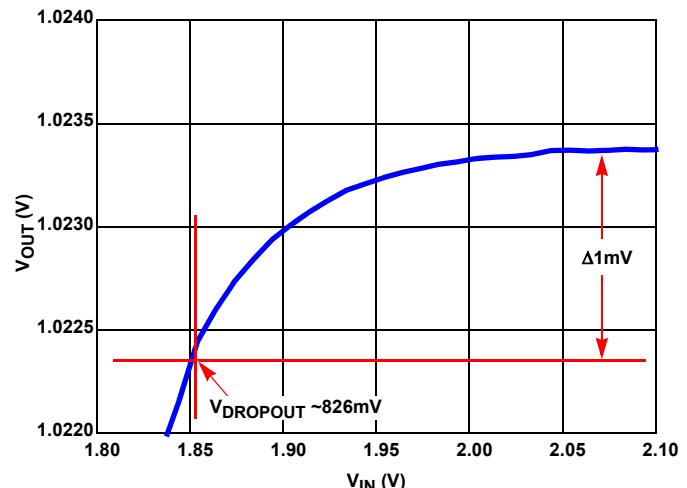


FIGURE 15. DROPOUT ZOOMED (10mA SOURCED LOAD)

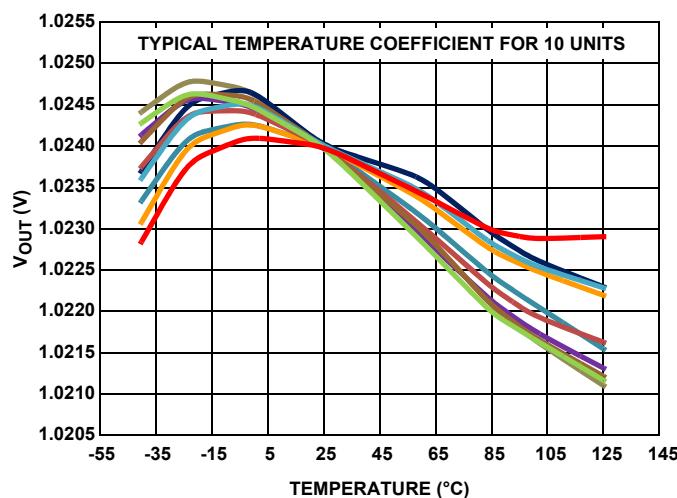


FIGURE 16. V_{OUT} VS TEMPERATURE

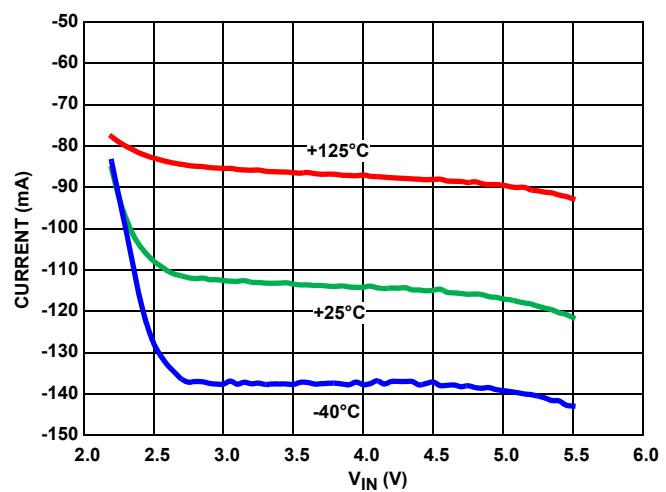


FIGURE 17. SHORT CIRCUIT TO GND

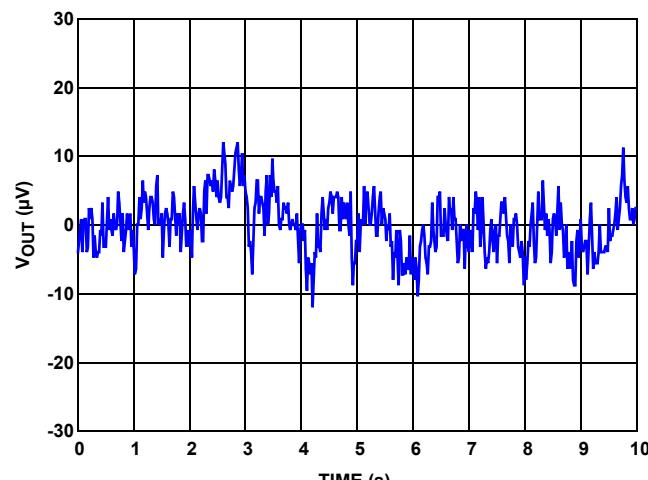


FIGURE 18. V_{OUT} VS NOISE, 0.1Hz TO 10Hz

Typical Performance Characteristics Curves ($V_{OUT} = 1.25V$) $V_{IN} = 3.0V$

$I_{OUT} = 0mA$, $T_A = +25^\circ C$ unless otherwise specified.

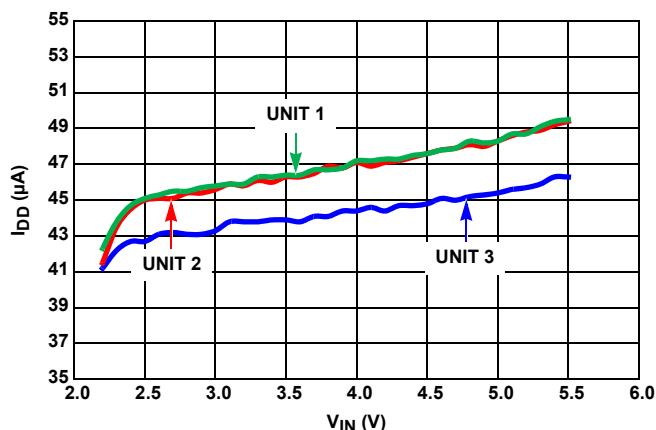


FIGURE 19. I_{IN} vs V_{IN} , THREE UNITS

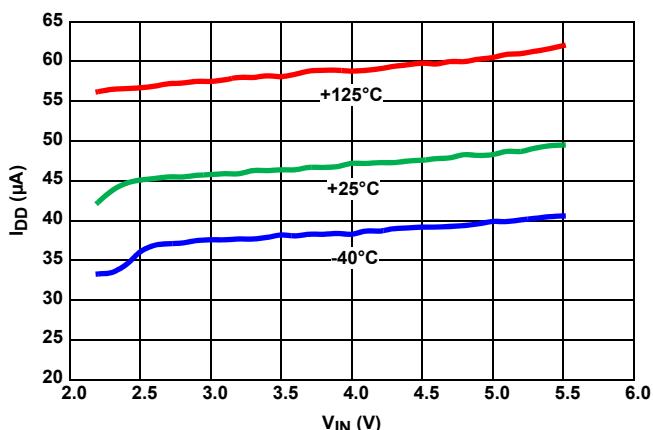


FIGURE 20. I_{IN} vs V_{IN} , OVER-TEMPERATURE

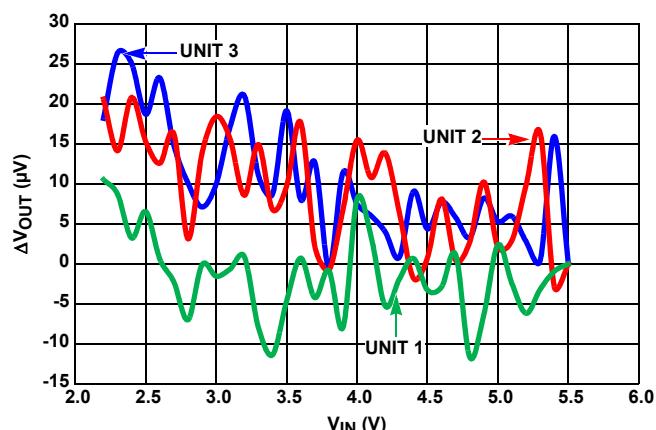


FIGURE 21. LINE REGULATION, THREE UNITS

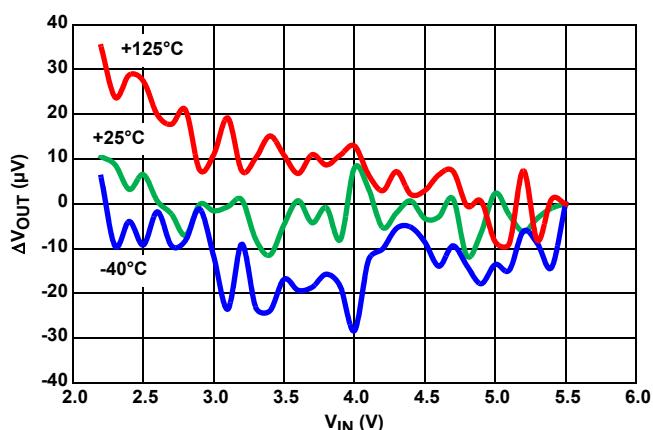


FIGURE 22. LINE REGULATION OVER-TEMPERATURE

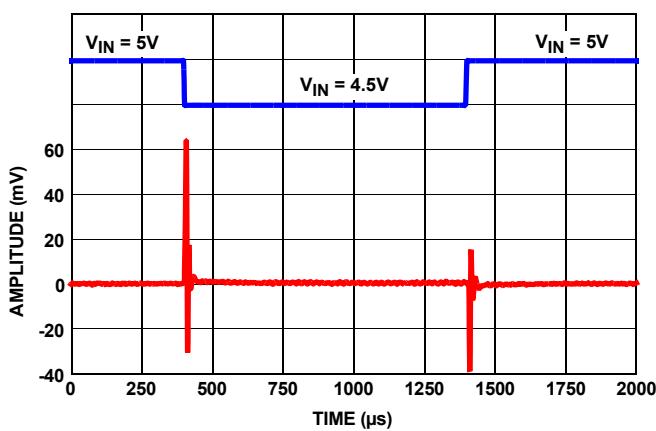


FIGURE 23. LINE TRANSIENT RESPONSE WITH $0.1\mu F$ LOAD

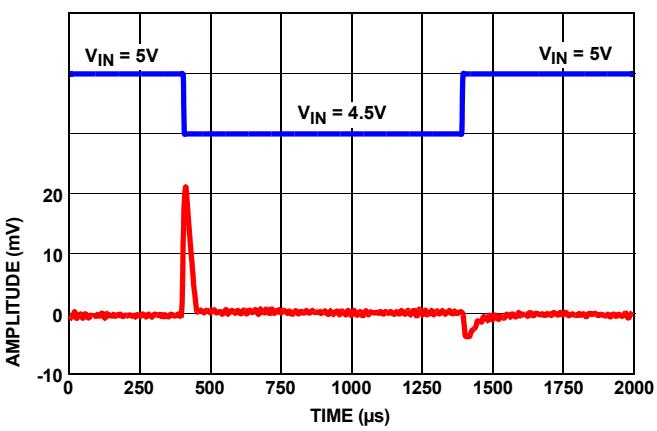


FIGURE 24. LINE TRANSIENT RESPONSE WITH $10\mu F$ LOAD

Typical Performance Characteristics Curves ($V_{OUT} = 1.25V$) $V_{IN} = 3.0V$,

$I_{OUT} = 0mA$, $T_A = +25^\circ C$ unless otherwise specified. (Continued)

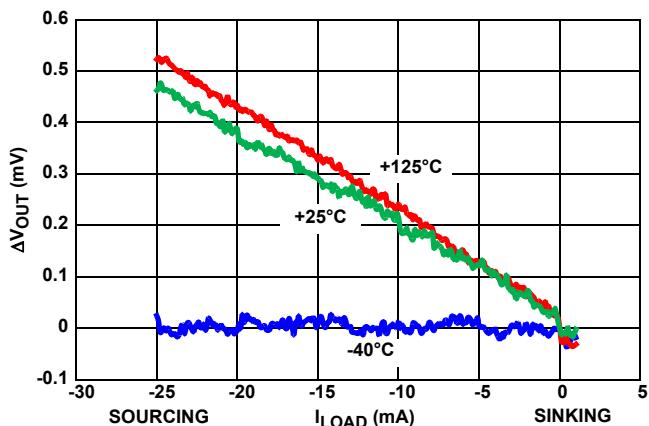


FIGURE 25. LOAD REGULATION OVER-TEMPERATURE

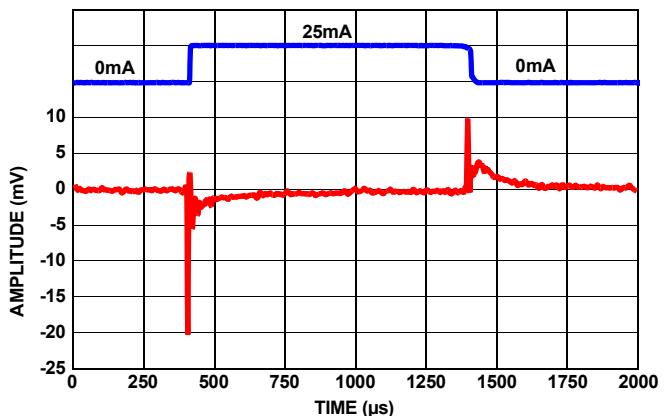


FIGURE 26. LOAD TRANSIENT RESPONSE AT 25mA LOAD AT $1\mu F$

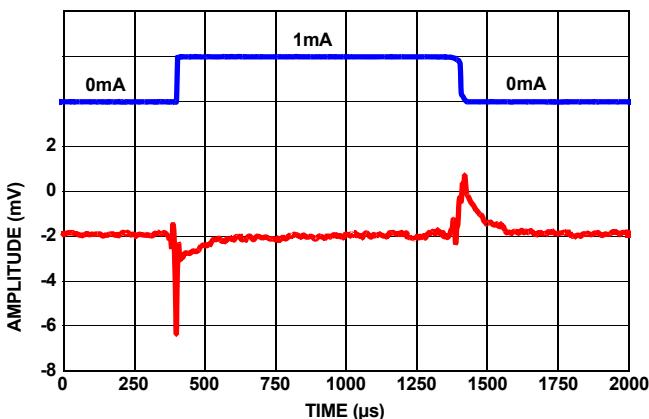


FIGURE 27. LOAD TRANSIENT RESPONSE AT 1mA LOAD AT $1\mu F$

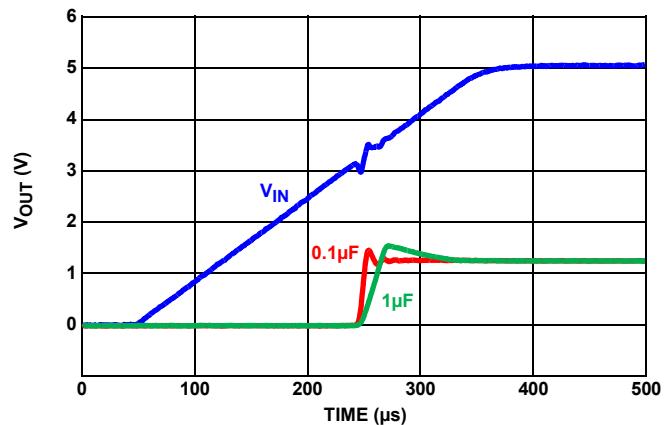


FIGURE 28. TURN-ON TIME

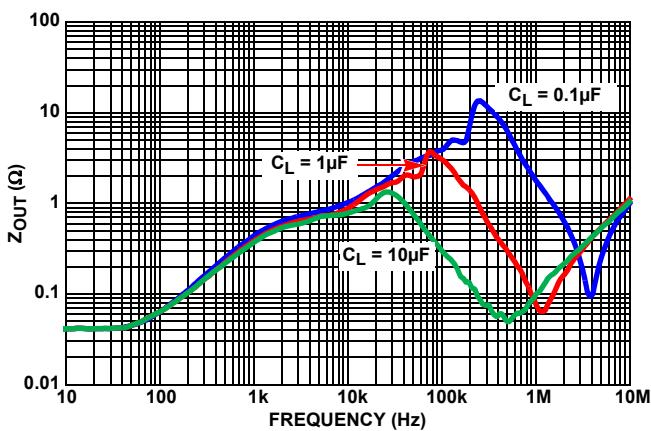


FIGURE 29. Z_{OUT} VS FREQUENCY

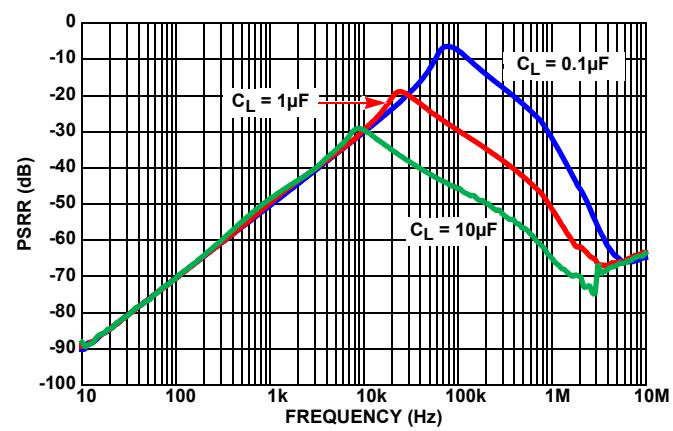


FIGURE 30. RIPPLE REJECTION AT DIFFERENT CAPACITIVE LOADS

Typical Performance Characteristics Curves ($V_{OUT} = 1.25V$) $V_{IN} = 3.0V$,

$I_{OUT} = 0mA$, $T_A = +25^\circ C$ unless otherwise specified. (Continued)

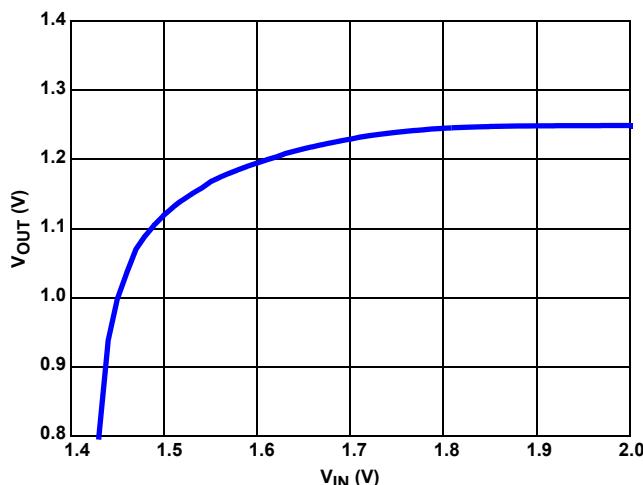


FIGURE 31. DROPOUT (10mA SOURCED LOAD)

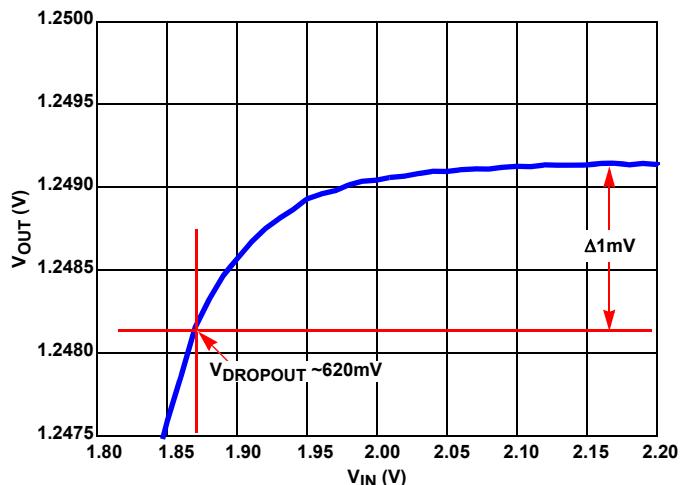


FIGURE 32. DROPOUT ZOOMED (10mA SOURCED LOAD)

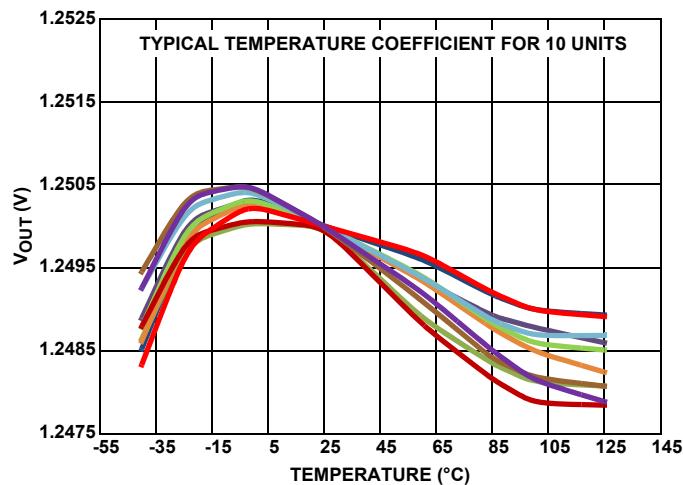


FIGURE 33. V_{OUT} VS TEMPERATURE

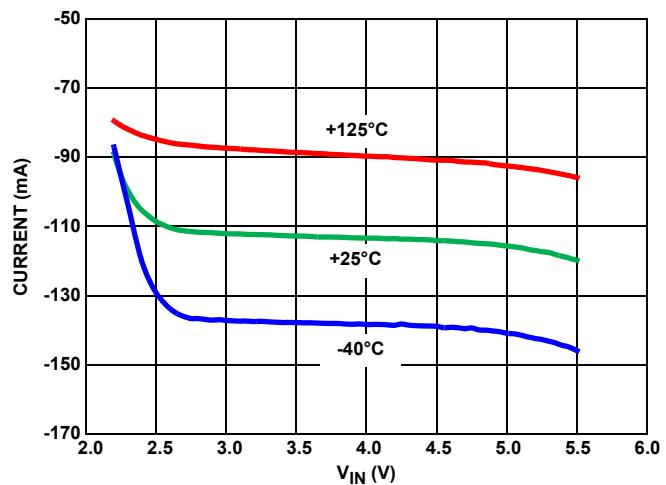


FIGURE 34. SHORT-CIRCUIT TO GND

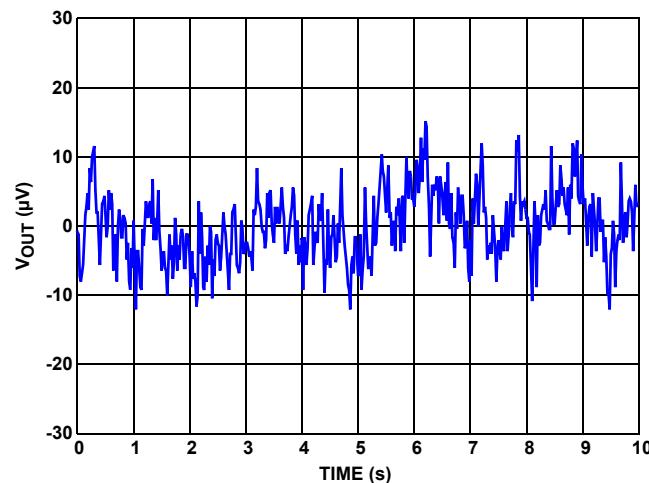


FIGURE 35. V_{OUT} VS NOISE, 0.1Hz TO 10Hz

Typical Performance Characteristics Curves ($V_{OUT} = 1.5V$)

$V_{IN} = 3.0V$, $I_{OUT} = 0mA$,
 $T_A = +25^\circ C$ unless otherwise specified.

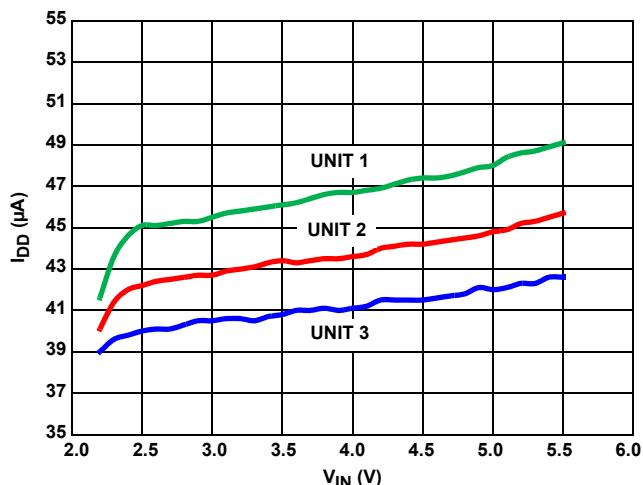
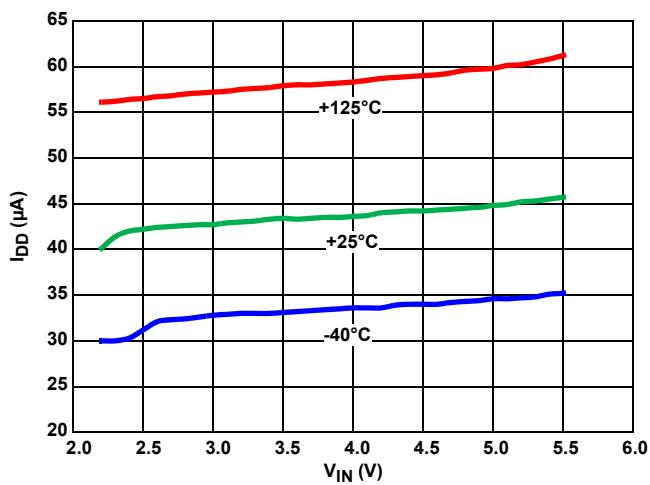
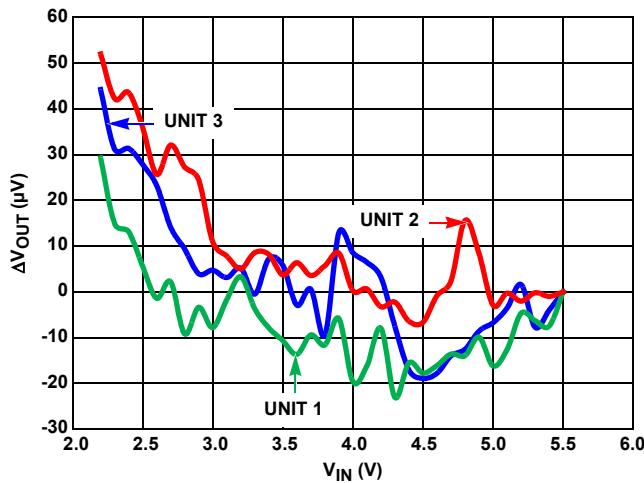
FIGURE 36. I_{IN} vs V_{IN} , THREE UNITSFIGURE 37. I_{IN} vs V_{IN} , OVER-TEMPERATURE

FIGURE 38. LINE REGULATION, THREE UNITS

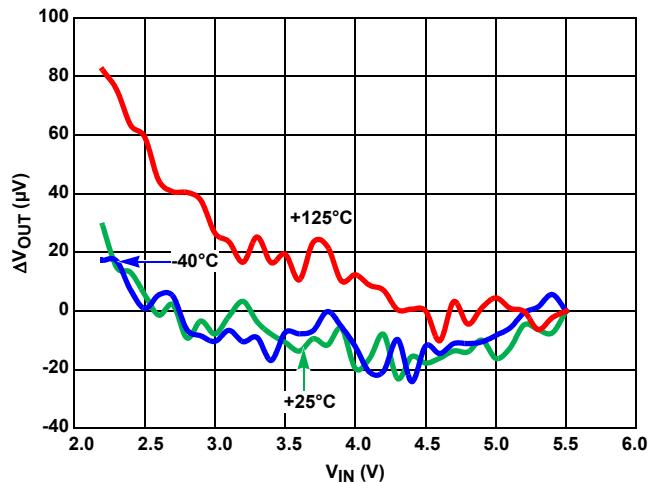
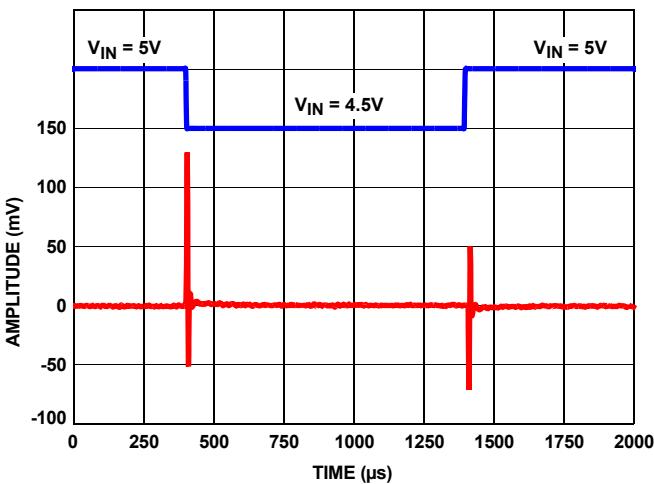
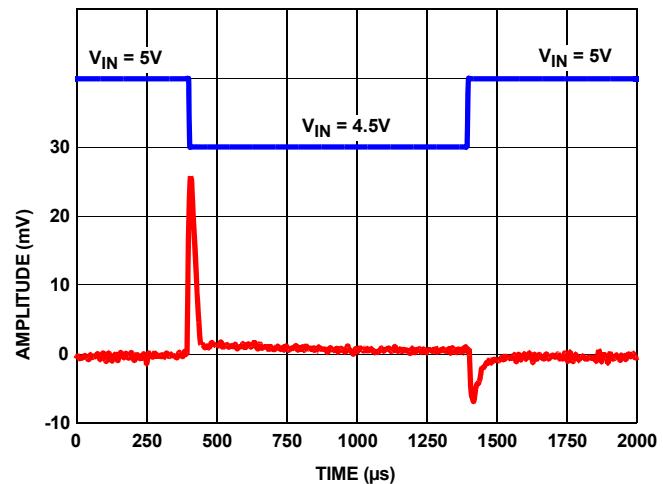


FIGURE 39. LINE REGULATION OVER-TEMPERATURE

FIGURE 40. LINE TRANSIENT RESPONSE WITH $0.1\mu F$ LOADFIGURE 41. LINE TRANSIENT RESPONSE WITH $10\mu F$ LOAD

Typical Performance Characteristics Curves ($V_{OUT} = 1.5V$) $V_{IN} = 3.0V$, $I_{OUT} = 0mA$, $T_A = +25^\circ C$ unless otherwise specified. (Continued)

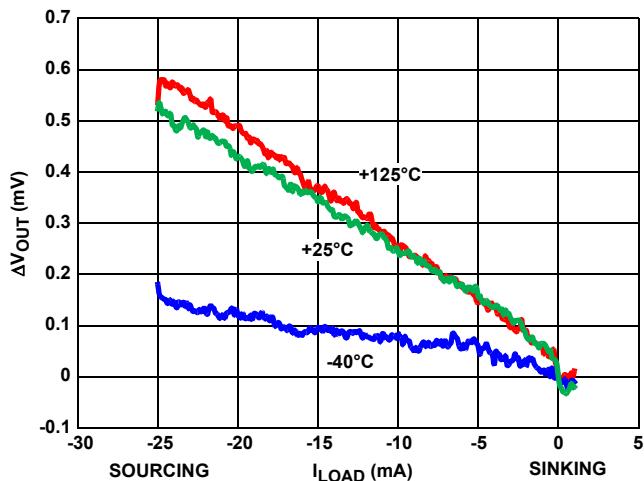


FIGURE 42. LOAD REGULATION OVER-TEMPERATURE

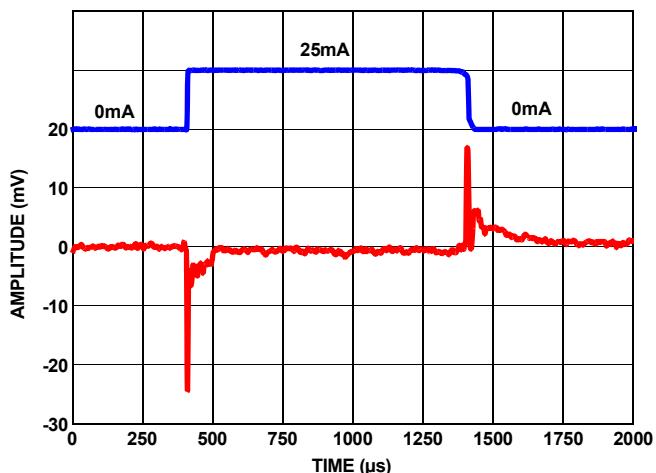


FIGURE 43. LOAD TRANSIENT RESPONSE AT 25mA LOAD AT $1\mu F$

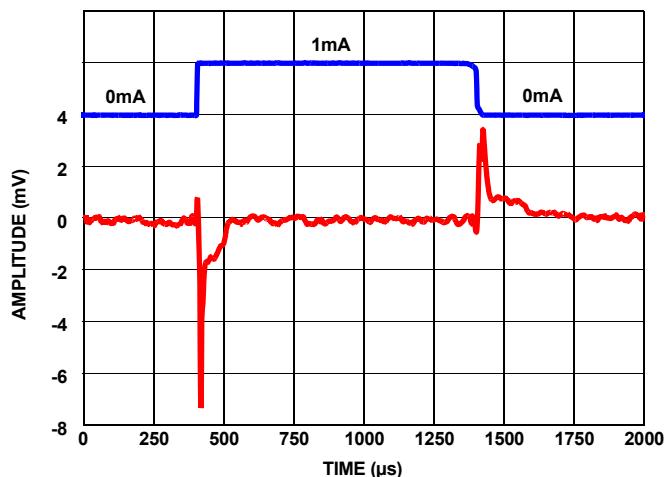


FIGURE 44. LOAD TRANSIENT RESPONSE AT 1mA LOAD AT $1\mu F$

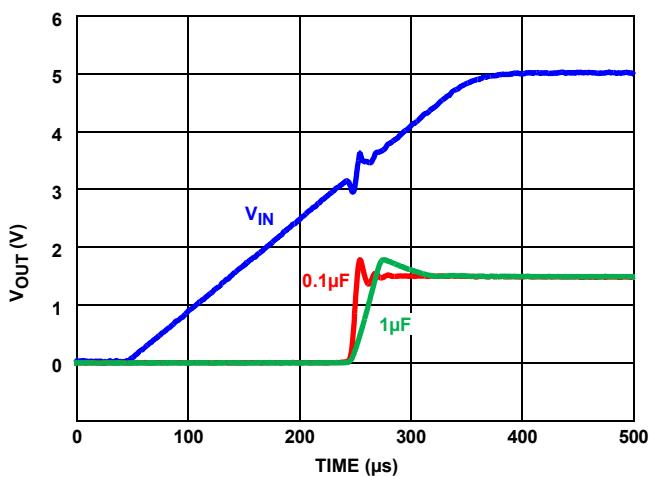


FIGURE 45. TURN-ON TIME

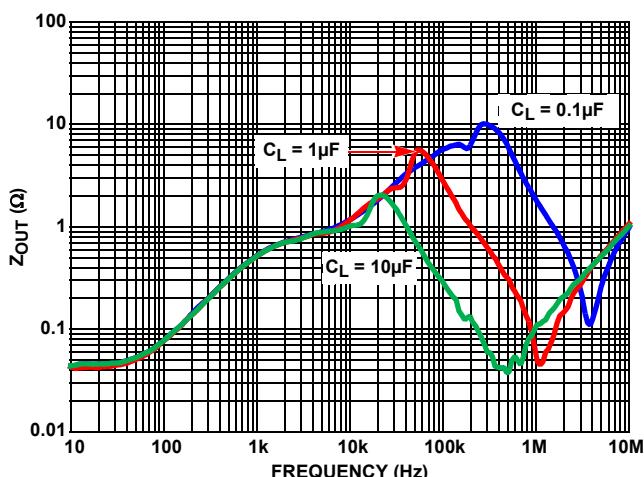


FIGURE 46. Z_{OUT} VS FREQUENCY

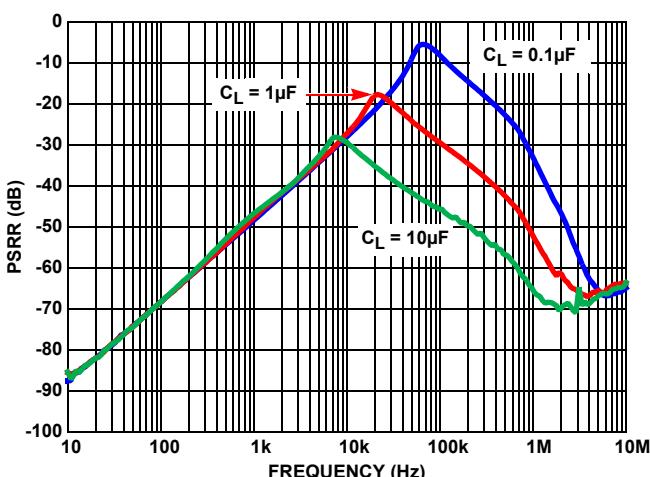


FIGURE 47. RIPPLE REJECTION AT DIFFERENT CAPACITIVE LOADS

Typical Performance Characteristics Curves ($V_{OUT} = 1.5V$)

$V_{IN} = 3.0V$, $I_{OUT} = 0mA$,
 $T_A = +25^\circ C$ unless otherwise specified. (Continued)

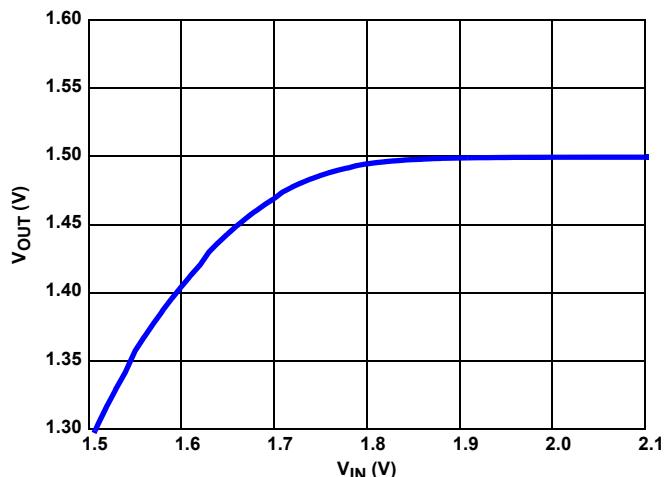


FIGURE 48. DROPOUT (10mA Sourced Load)

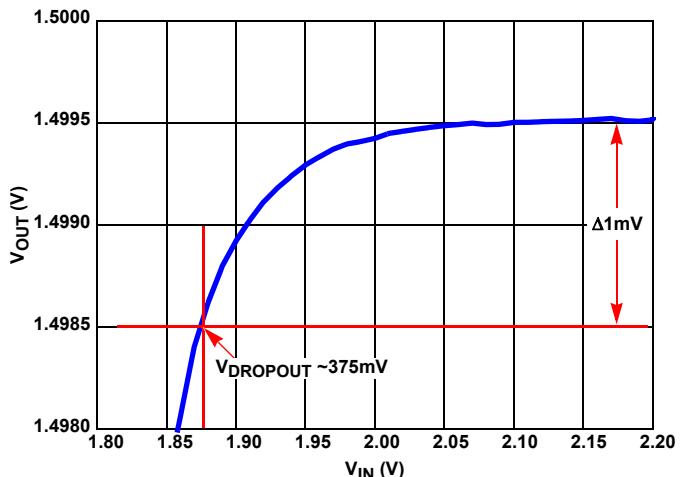


FIGURE 49. DROPOUT ZOOMED (10mA Sourced Load)

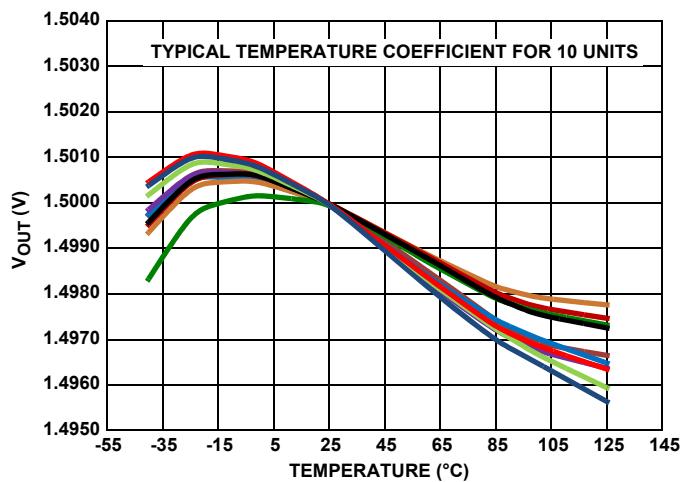
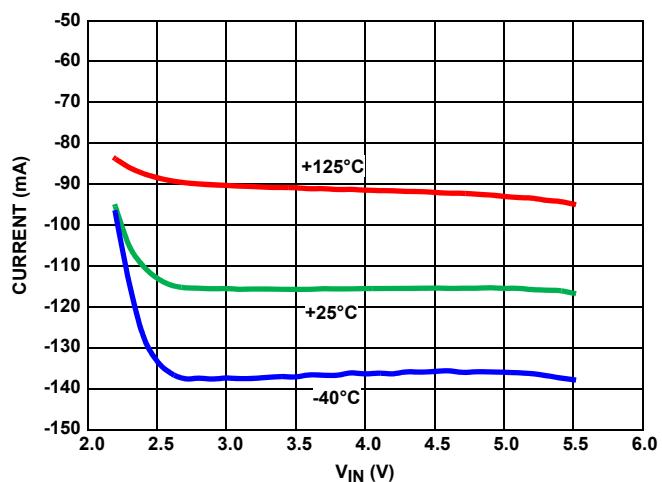
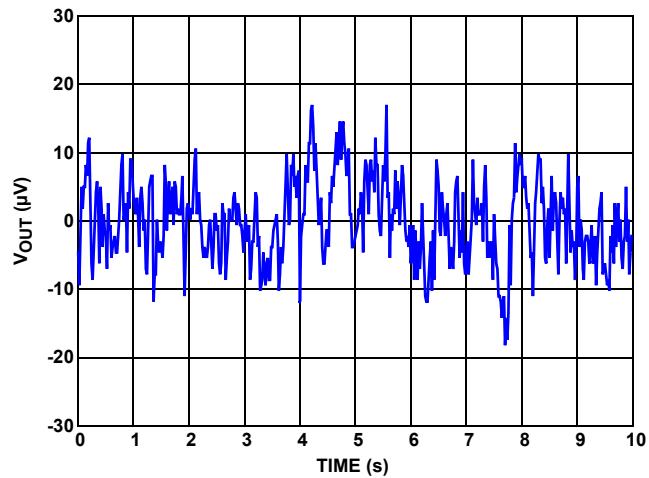
FIGURE 50. V_{OUT} vs TEMPERATURE

FIGURE 51. SHORT-CIRCUIT TO GND

FIGURE 52. V_{OUT} vs NOISE, 0.1Hz TO 10Hz

Typical Performance Characteristics Curves ($V_{OUT} = 2.048V$)

$I_{OUT} = 0mA$, $T_A = +25^\circ C$ unless otherwise specified.

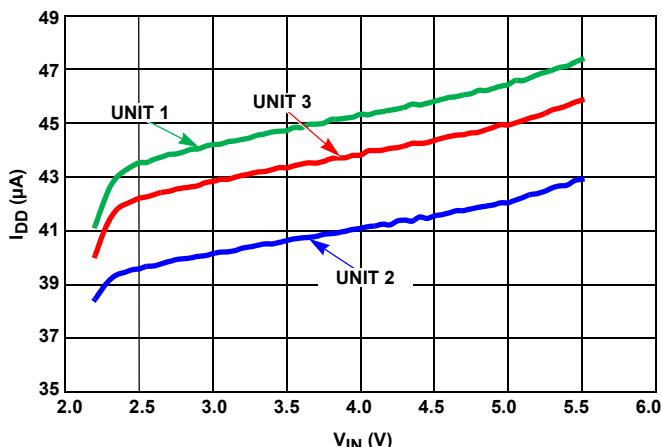


FIGURE 53. I_{IN} vs V_{IN} , THREE UNITS

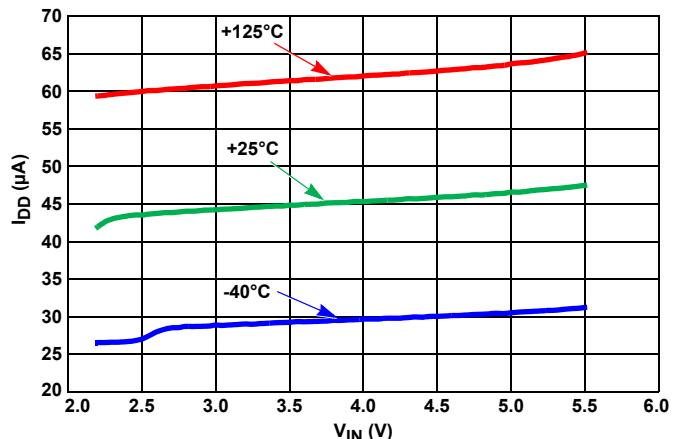


FIGURE 54. I_{IN} vs V_{IN} , OVER-TEMPERATURE

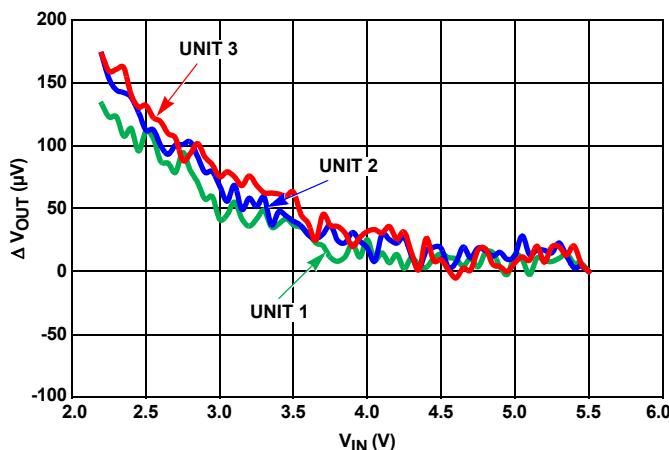


FIGURE 55. LINE REGULATION, THREE UNITS

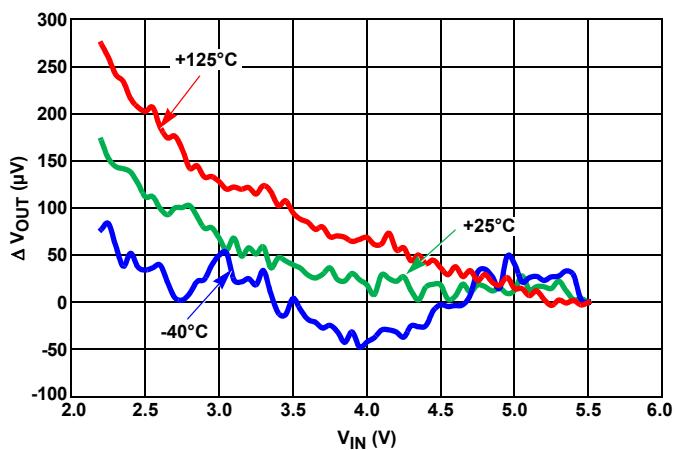


FIGURE 56. LINE REGULATION OVER-TEMPERATURE

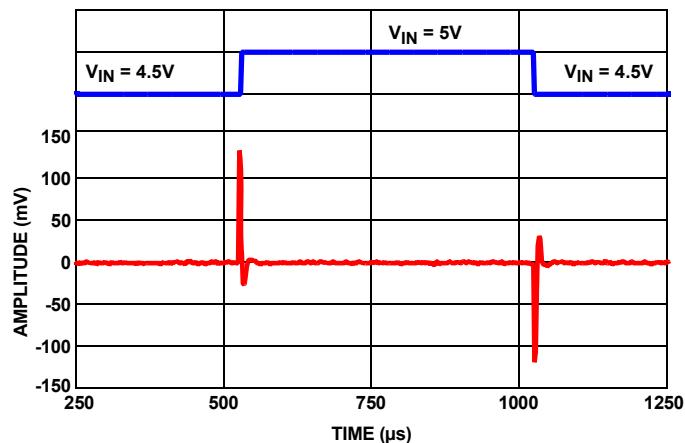


FIGURE 57. LINE TRANSIENT RESPONSE WITH $0.1\mu F$ LOAD

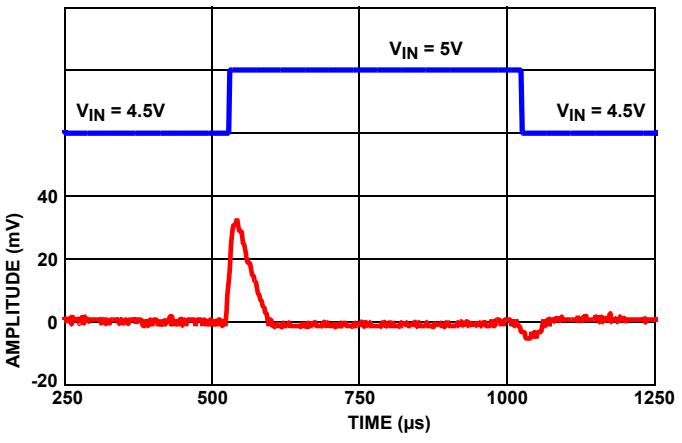


FIGURE 58. LINE TRANSIENT RESPONSE WITH $10\mu F$ LOAD

Typical Performance Characteristics Curves ($V_{OUT} = 2.048V$) $V_{IN} = 3.0V$,

$I_{OUT} = 0mA$, $T_A = +25^\circ C$ unless otherwise specified. (Continued)

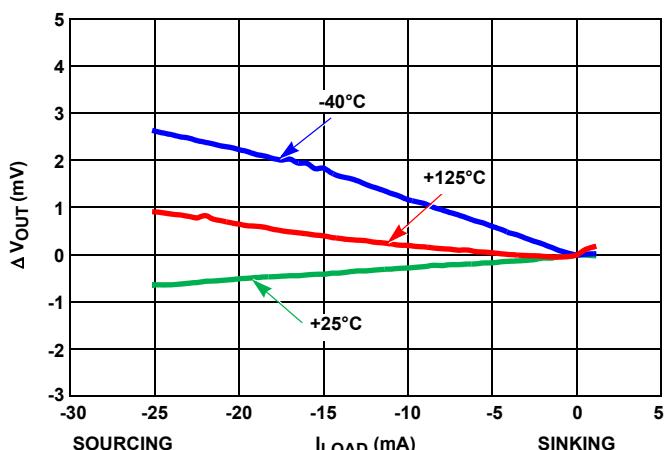


FIGURE 59. LOAD REGULATION OVER-TEMPERATURE

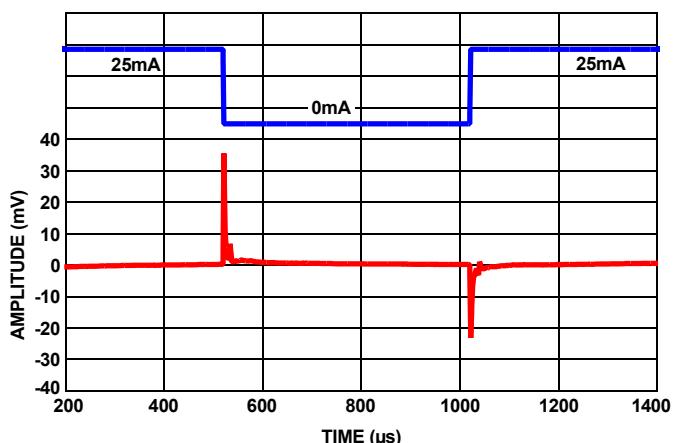


FIGURE 60. LOAD TRANSIENT RESPONSE AT 25mA LOAD AT $1\mu F$

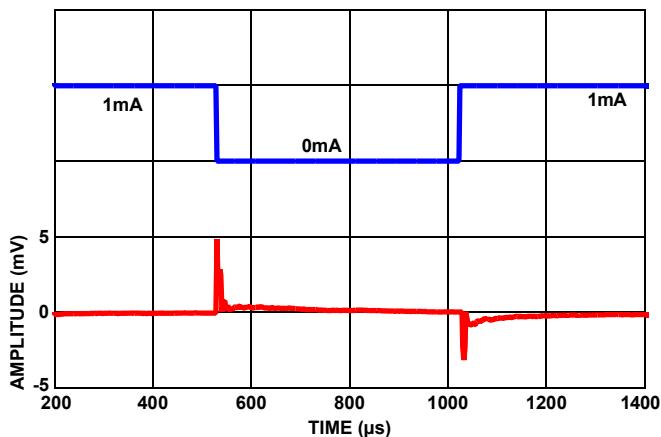


FIGURE 61. LOAD TRANSIENT RESPONSE AT 1mA LOAD AT $1\mu F$

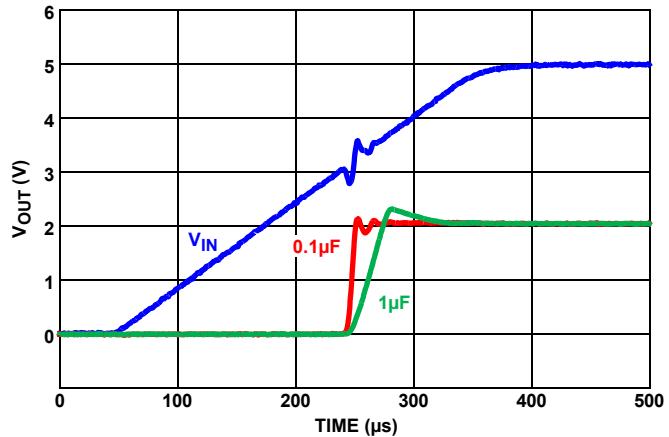


FIGURE 62. TURN-ON TIME

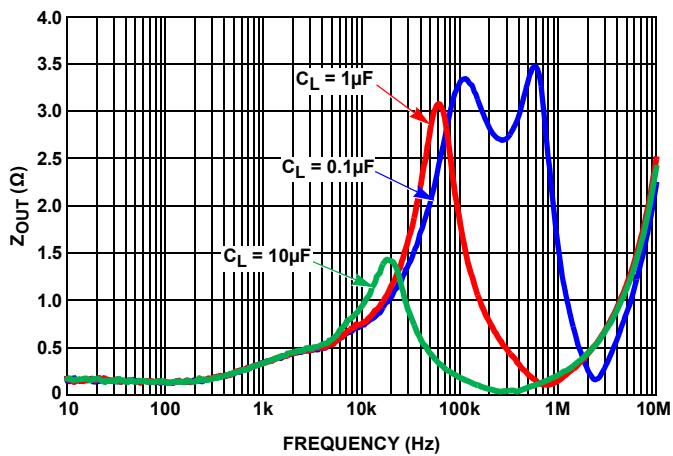


FIGURE 63. Z_{OUT} VS FREQUENCY

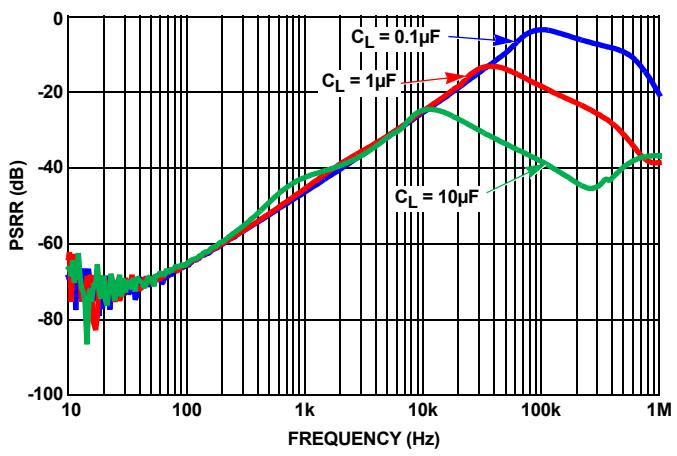


FIGURE 64. RIPPLE REJECTION AT DIFFERENT CAPACITIVE LOADS

Typical Performance Characteristics Curves ($V_{OUT} = 2.048V$) $V_{IN} = 3.0V$,

$I_{OUT} = 0mA$, $T_A = +25^\circ C$ unless otherwise specified. (Continued)

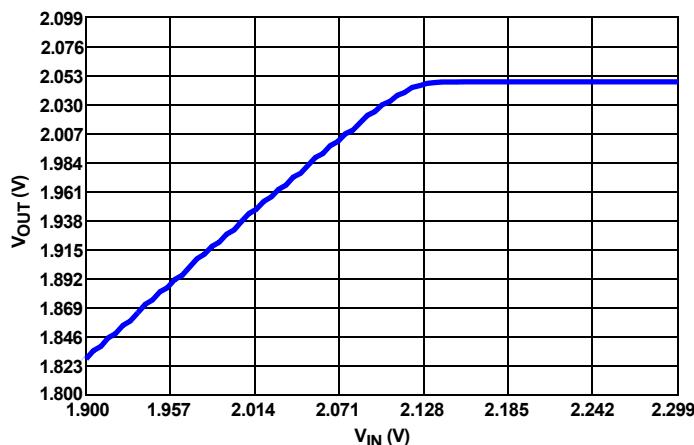


FIGURE 65. DROPOUT (10mA SOURCED LOAD)

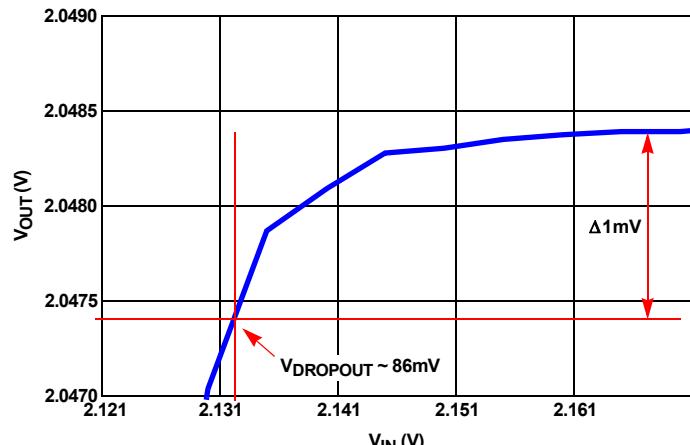


FIGURE 66. DROPOUT ZOOMED (10mA SOURCED LOAD)

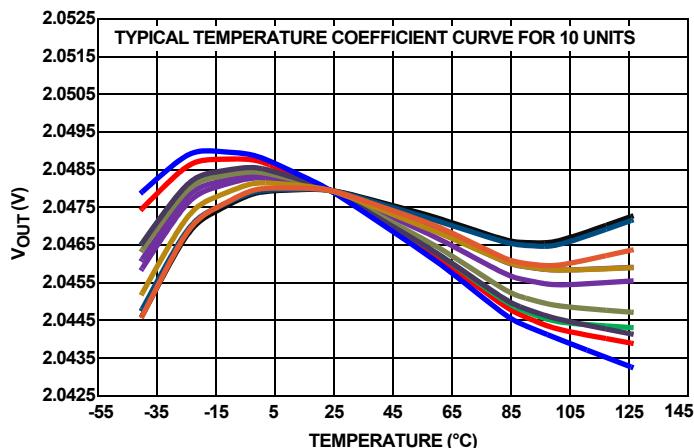


FIGURE 67. V_{OUT} vs TEMPERATURE

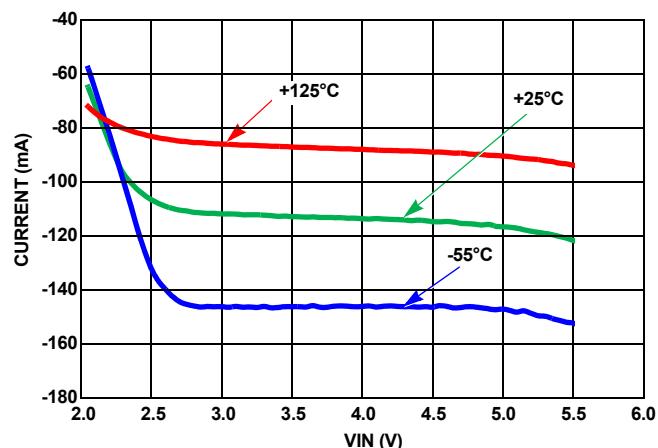


FIGURE 68. SHORT CIRCUIT TO GND

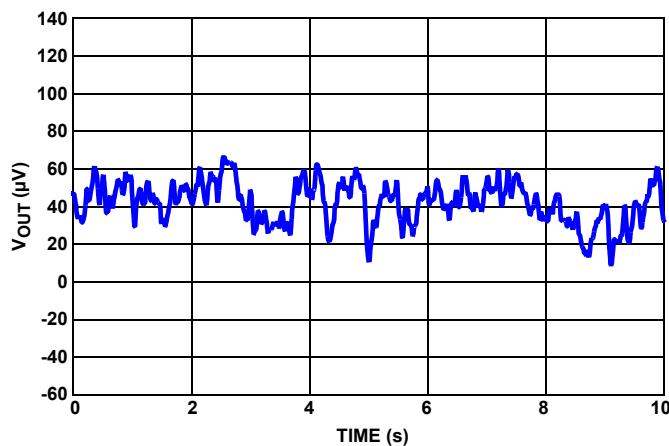


FIGURE 69. V_{OUT} vs NOISE, 0.1Hz TO 10Hz

Typical Performance Characteristics Curves ($V_{OUT} = 2.5V$) $V_{IN} = 3.0V$, $I_{OUT} = 0mA$, $T_A = +25^\circ C$ unless otherwise specified.

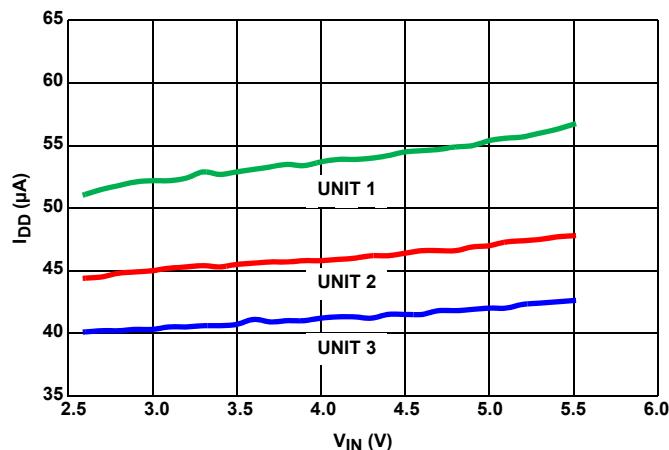


FIGURE 70. I_{IN} vs V_{IN} , THREE UNITS

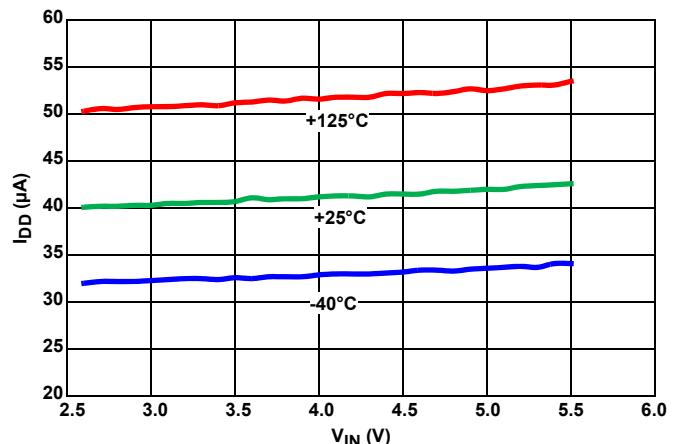


FIGURE 71. I_{IN} vs V_{IN} , OVER-TEMPERATURE

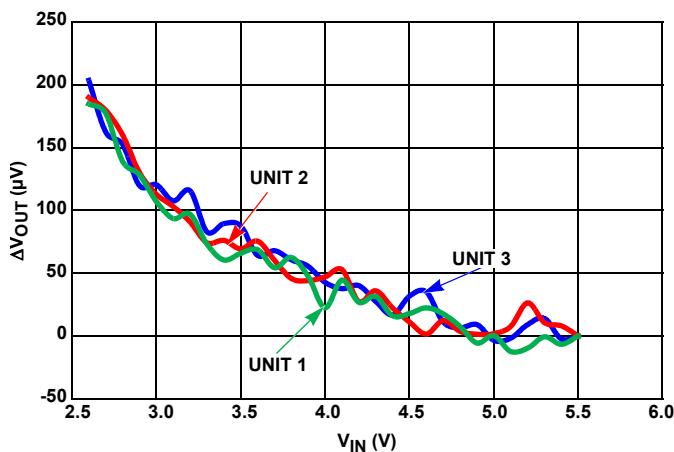


FIGURE 72. LINE REGULATION, THREE UNITS

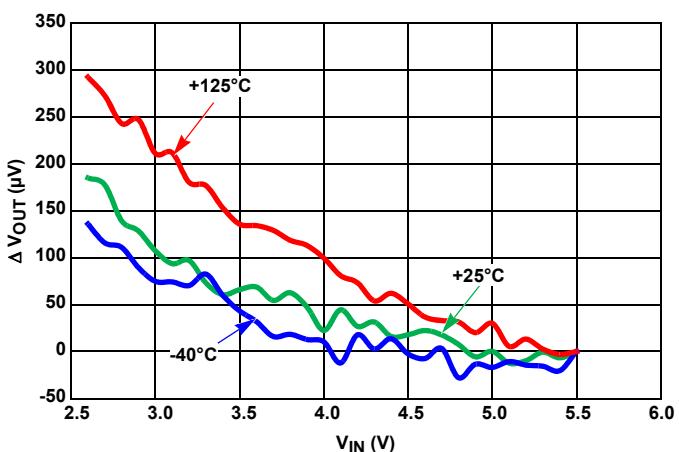


FIGURE 73. LINE REGULATION OVER-TEMPERATURE

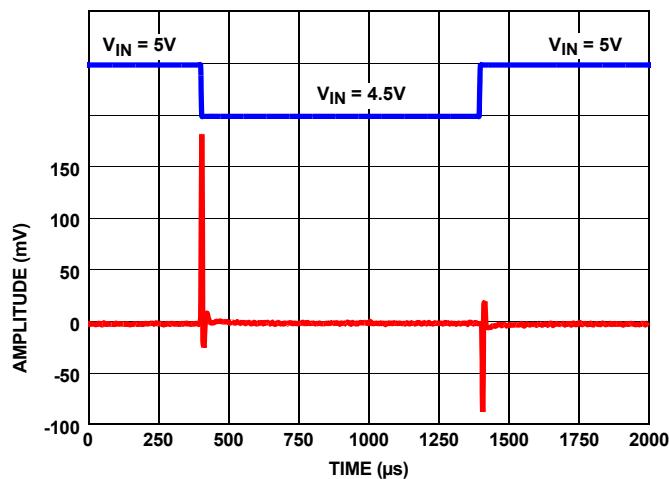


FIGURE 74. LINE TRANSIENT RESPONSE WITH $0.1\mu F$ LOAD

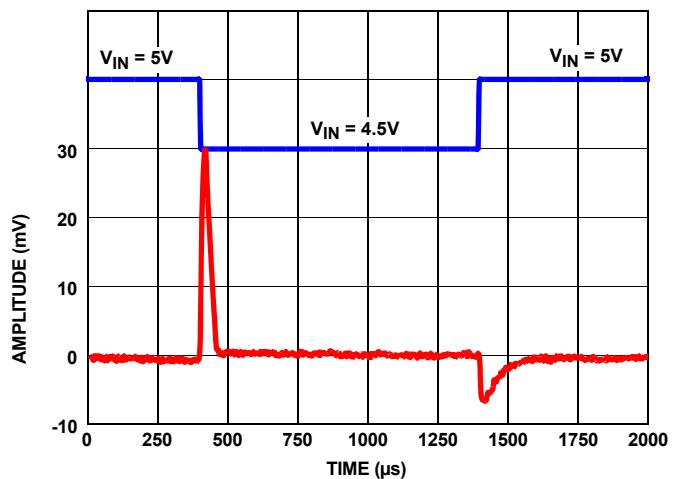


FIGURE 75. LINE TRANSIENT RESPONSE WITH $10\mu F$ LOAD

Typical Performance Characteristics Curves ($V_{OUT} = 2.5V$)

$V_{IN} = 3.0V$, $I_{OUT} = 0mA$,
 $T_A = +25^\circ C$ unless otherwise specified. (Continued)

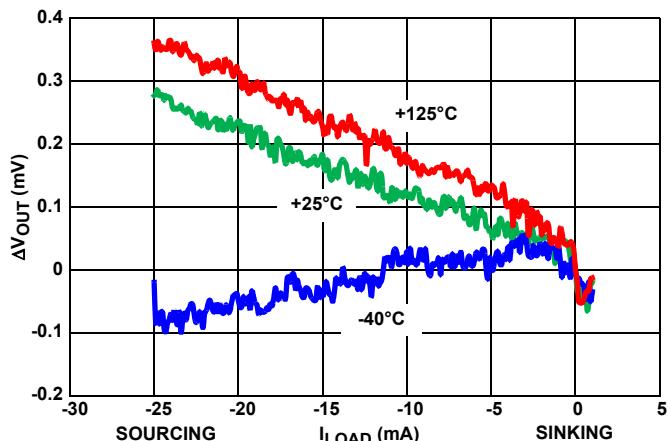


FIGURE 76. LOAD REGULATION OVER-TEMPERATURE

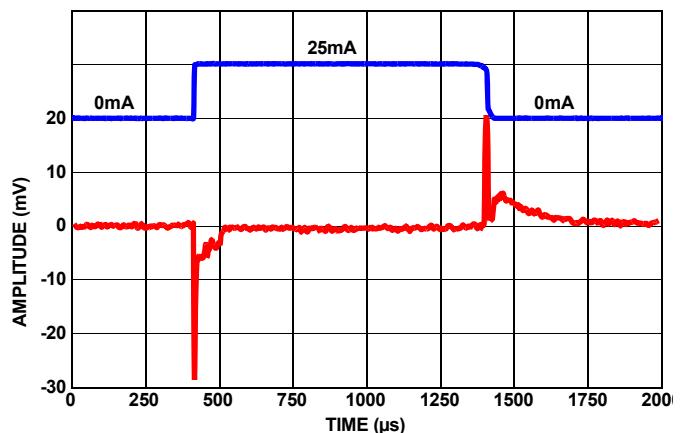


FIGURE 77. LOAD TRANSIENT RESPONSE AT 25mA LOAD AT $1\mu F$

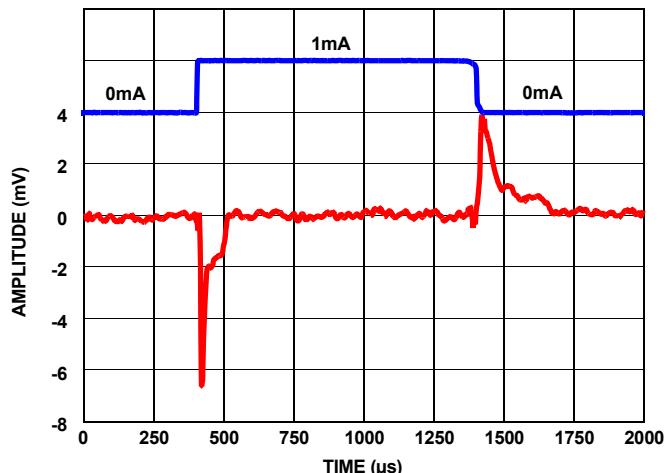


FIGURE 78. LOAD TRANSIENT RESPONSE AT 1mA LOAD AT $1\mu F$

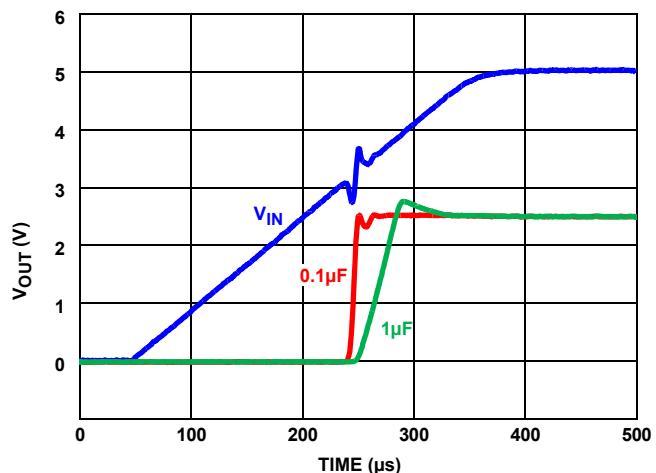


FIGURE 79. TURN-ON TIME

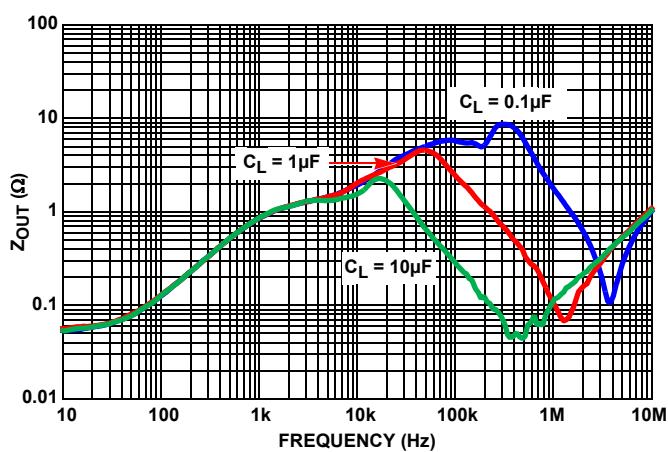


FIGURE 80. Z_{OUT} VS FREQUENCY

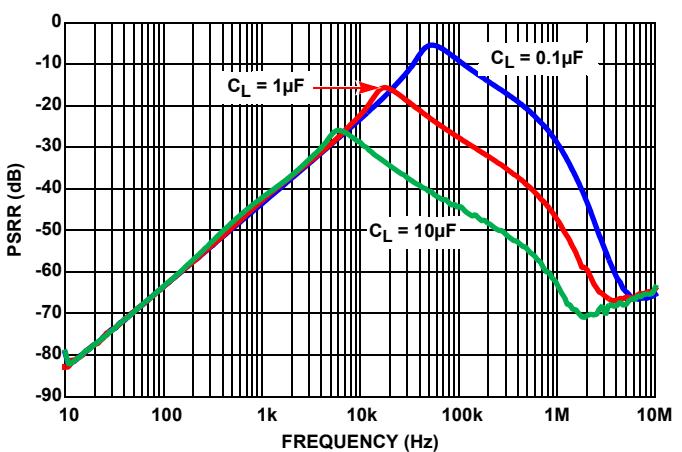


FIGURE 81. RIPPLE REJECTION AT DIFFERENT CAPACITIVE LOADS

Typical Performance Characteristics Curves ($V_{OUT} = 2.5V$)

$V_{IN} = 3.0V$, $I_{OUT} = 0mA$,
 $T_A = +25^\circ C$ unless otherwise specified. (Continued)

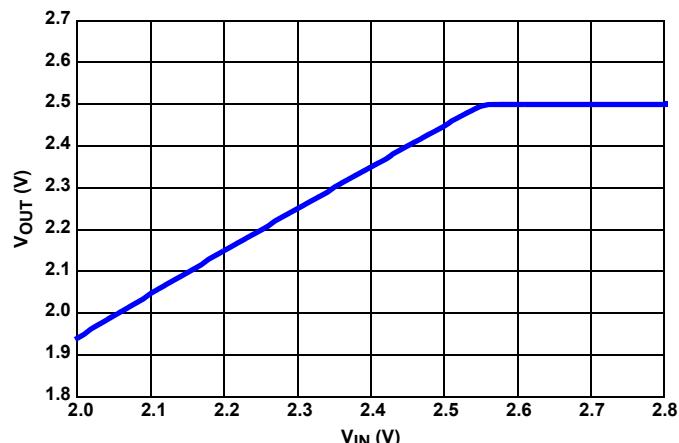


FIGURE 82. DROPOUT (10mA Sourced Load)

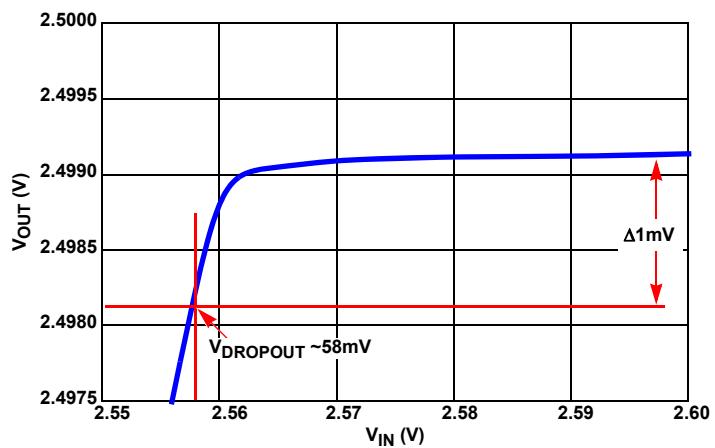


FIGURE 83. DROPOUT ZOOMED (10mA Sourced Load)

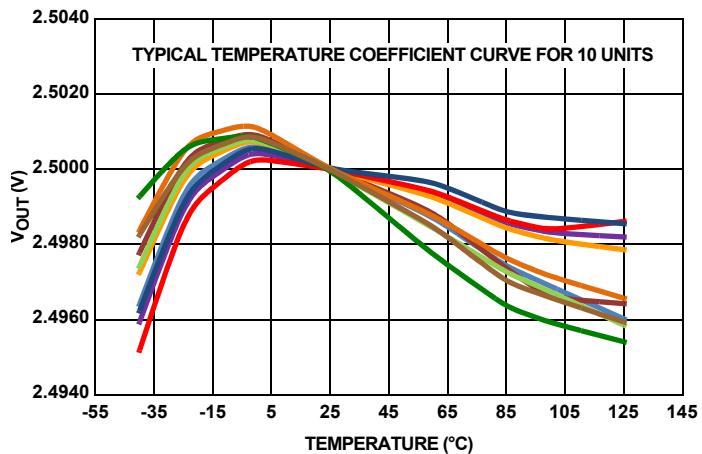
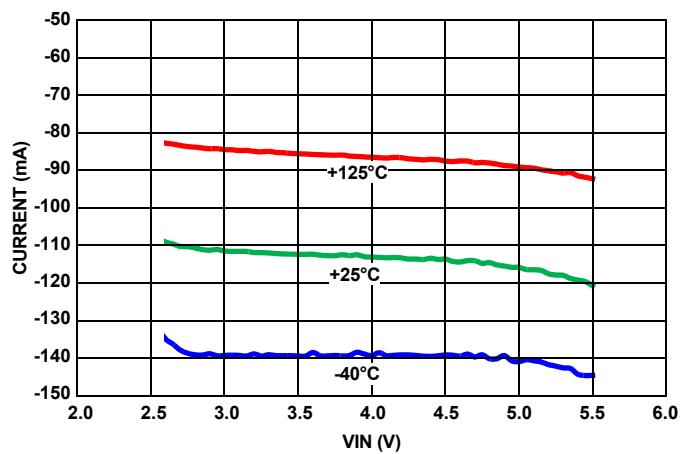
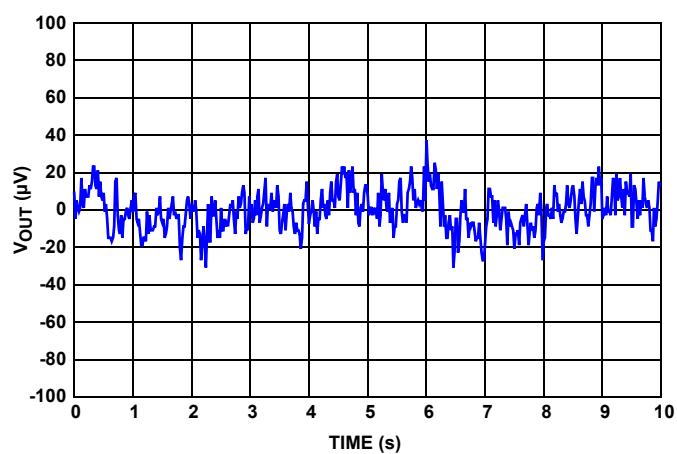
FIGURE 84. V_{OUT} vs TEMPERATURE

FIGURE 85. SHORT-CIRCUIT TO GND

FIGURE 86. V_{OUT} vs NOISE, 0.1Hz TO 10Hz

Typical Performance Characteristics Curves ($V_{OUT} = 3.0V$)

$V_{IN} = 5.0V$, $I_{OUT} = 0mA$,
 $T_A = +25^\circ C$ unless otherwise specified.

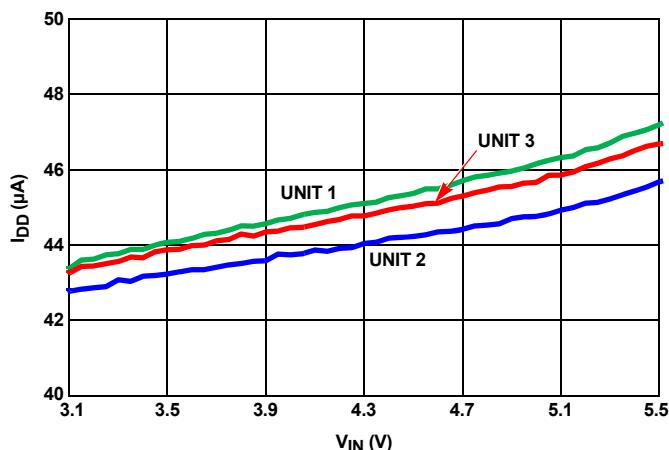


FIGURE 87. I_{IN} vs V_{IN} , THREE UNITS

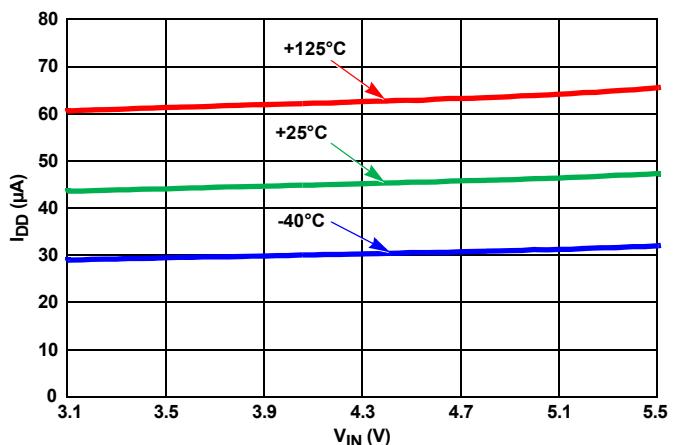


FIGURE 88. I_{IN} vs V_{IN} , OVER-TEMPERATURE

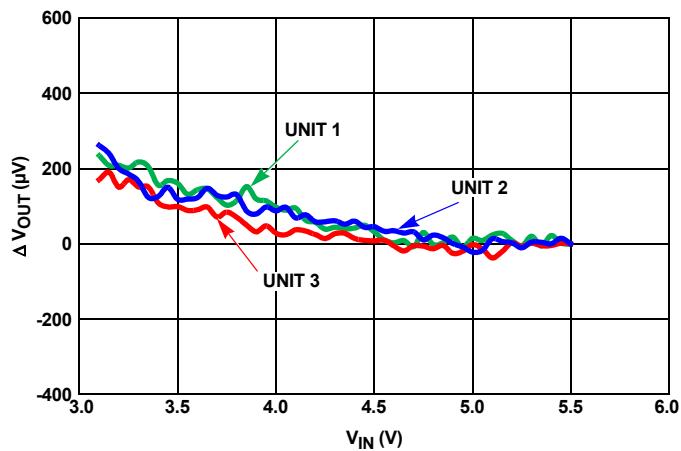


FIGURE 89. LINE REGULATION, THREE UNITS

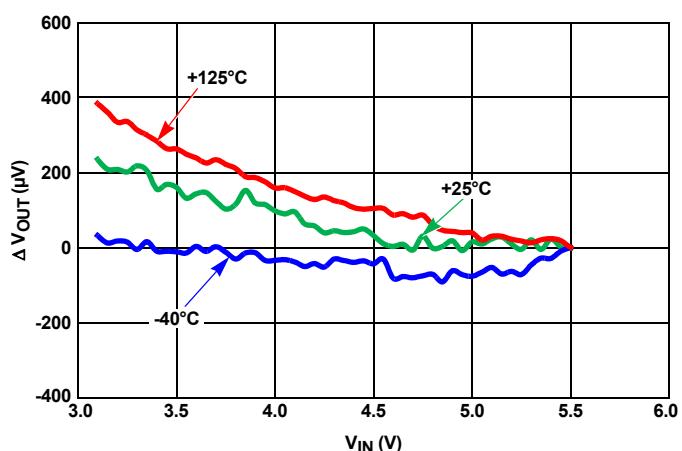


FIGURE 90. LINE REGULATION OVER-TEMPERATURE

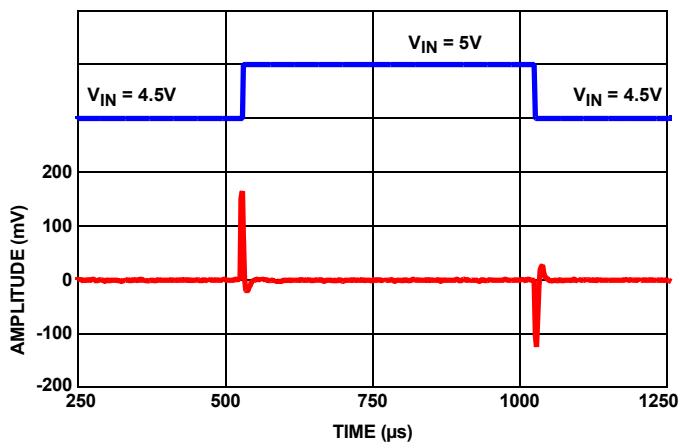


FIGURE 91. LINE TRANSIENT WITH $0.1\mu F$ LOAD

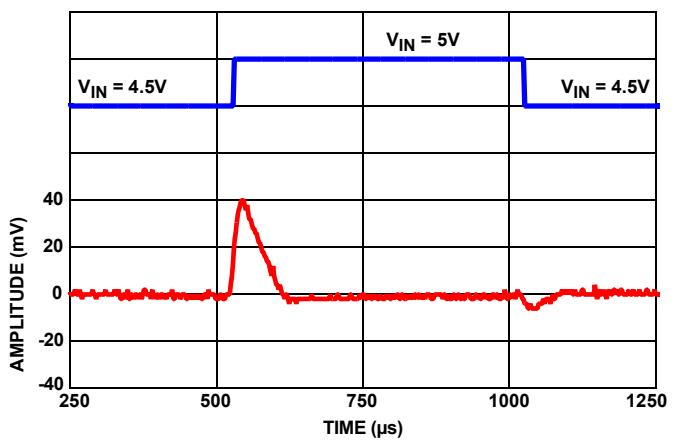


FIGURE 92. LINE TRANSIENT RESPONSE WITH $10\mu F$ LOAD

Typical Performance Characteristics Curves ($V_{OUT} = 3.0V$) $V_{IN} = 5.0V$, $I_{OUT} = 0mA$, $T_A = +25^\circ C$ unless otherwise specified. (Continued)

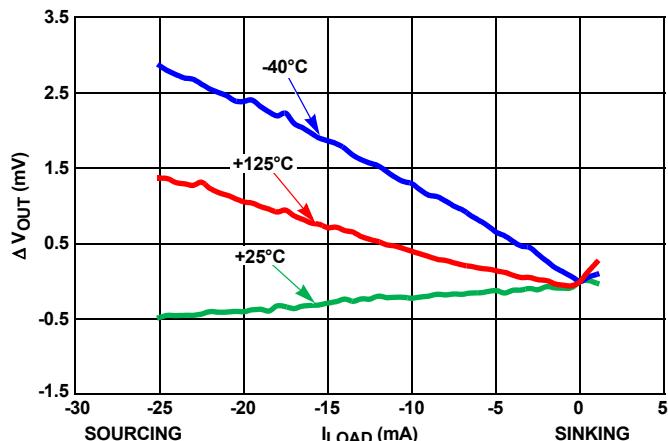


FIGURE 93. LOAD REGULATION OVER-TEMPERATURE

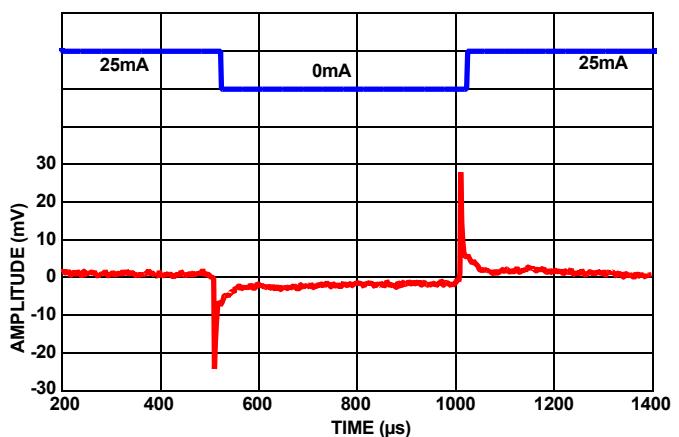


FIGURE 94. LOAD TRANSIENT RESPONSE AT 25mA LOAD AT $1\mu F$

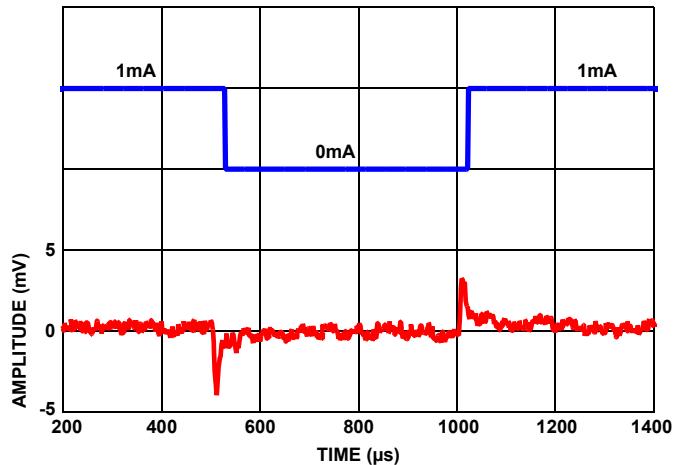


FIGURE 95. LOAD TRANSIENT RESPONSE AT 1mA LOAD AT $1\mu F$

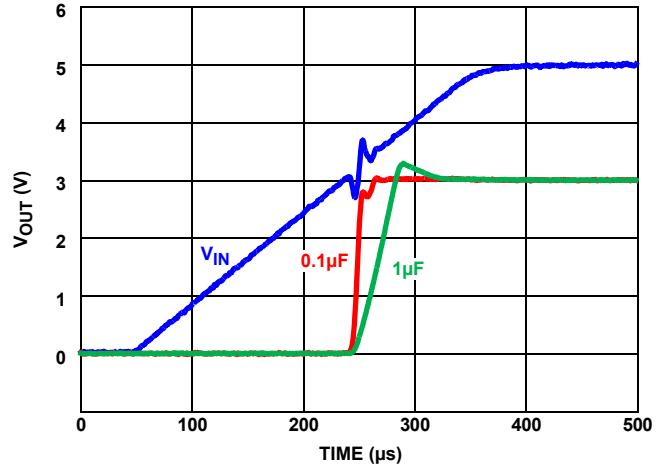


FIGURE 96. TURN-ON TIME

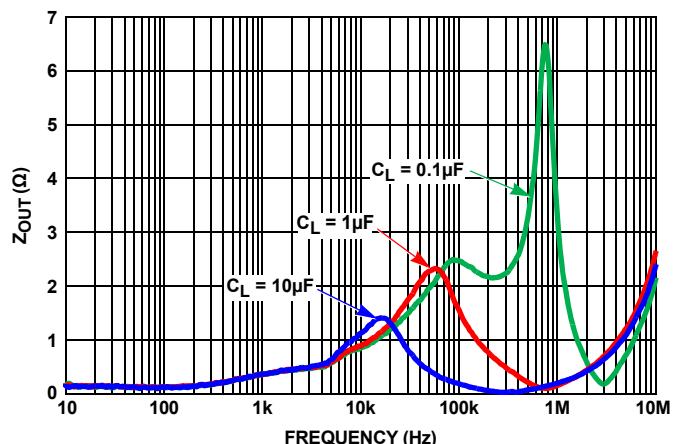


FIGURE 97. Z_{OUT} VS FREQUENCY

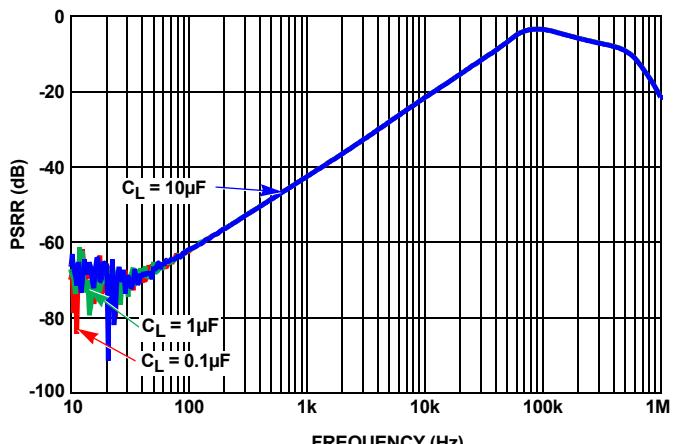


FIGURE 98. RIPPLE REJECTION AT DIFFERENT CAPACITIVE LOADS