



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




PANDUIT® SUPERFLEX™ Nylon 6.6 Cable Ties

SUPERFLEX™ Nylon 6.6 Cable Ties

Featuring the world's
longest one-piece
nylon cable tie—58.50"

Lightweight ties are super flexible to conform to bundle. Unique design provides high strength, increased impact resistance and dimensional stability for improved clamping.

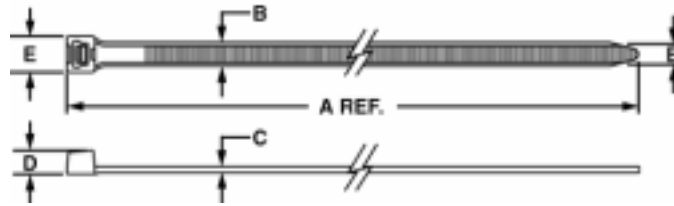


Part Number†	Cross Section	Length A In. (mm)	Width B In. (mm)	Thickness C In. (mm)	Head Height D In. (mm)	Head Width E In. (mm)	Max. Bundle Dia. In. (mm)	Min. Loop Tensile Strength Lbs. (N)	Recommended PANDUIT® Installation Tool Part No.	Packaging*			
										Std. Pkg. Qty.	Std. Ctn. Qty.	Bulk Pkg. Qty.	Bulk Ctn. Qty.
** SLT8LH-L	Lt. Hvy.	28.00 (711)	.30 (7.6)	.055 (1.4)	.300 (7.6)	.500 (12.7)	8.00 (203)	120 (534)	GS4H or STHV	50	1000	—	—
** SLT10LH-L		34.75 (882)					10.25 (280)			50	1000	—	—
SLT12H-L	Hvy.	40.25 (1022)	.33 (8.3)	.075 (1.9)	.300 (7.6)	.500 (12.7)	12.25 (311)	175 (778)		50	1000	—	—
SLT14H-L		46.00 (1168)					14.25 (362)			50	1000	—	—
SLT16H-L		52.25 (1327)					16.35 (413)			50	1000	—	—
SLT18H-L		58.50 (1486)					18.25 (464)			50	1000	—	—

Also available in weather resistant 6.6 nylon. Add suffix -0, i.e. SLT8LH-L0 and SLT10LH-L0. Most commonly used parts appear in **BOLD.

IN-LINE Nylon 6.6 Cable Ties

IN-LINE ties have serrations on the outside which allow the strap body to be inserted parallel to the strap head. Tie conforms to large bundles better than conventional ties. Available in weather resistant 6.6 nylon (-0). May be installed with **PANDUIT** GS4H cable tie installation tools.

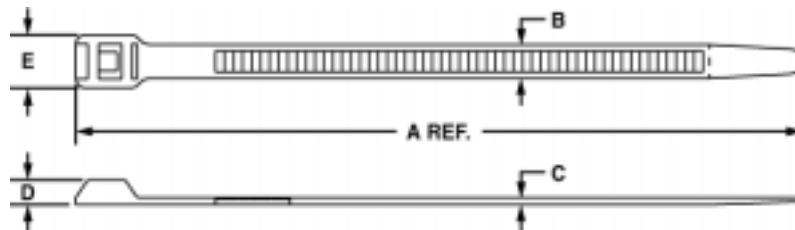

Part Number†	Cross Section	Length A In. (mm)	Width B In. (mm)	Thickness C In. (mm)	Head Height D In. (mm)	Head Width E In. (mm)	Max. Bundle Dia. In. (mm)	Min. Loop Tensile Strength Lbs. (N)	Recommended PANDUIT® Installation Tool Part No.	Packaging*			
										Std. Pkg. Qty.	Std. Ctn. Qty.	Bulk Pkg. Qty.	Bulk Ctn. Qty.
IT940-C0	Hvy.	6.8 (172)	.350 (9)	.065 (1.65)	.250 (6.33)	.556 (14.1)	1.57 (40)	124 (550)	GS4H	—	—	100	1000
IT965-C0		10.1 (258)					2.58 (65)			—	—	100	1000
IT9100-C0		14.1 (359)					3.94 (100)			—	—	100	1000
IT9115-C0		15.4 (391)		4.46 (113)	—	—	100			1000			
IT9150-C0		20.4 (518)		5.91 (150)	—	—	100			1000			
IT9250-C0		33.0 (838)		9.84 (250)	—	—	100			1000			

Most commonly used parts appear in **BOLD**.

*Order the Number of Pieces Required in Multiples of Packaging Quantities.

†Part Number shown for SLT ties is Standard Package Quantity and Part Number shown for In-Line ties is Bulk Package quantity.