Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!

Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832
Email & Skype: info@chipsmall.com Web: www.chipsmall.com
Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

IXYS

HiPerFAST™ IGBTs B2-Class High Speed w/ Diode

IXGA16N60B2D1
IXGP16N60B2D1
IXGH16N60B2D1

V_{CES} = 600V
I_{C110} = 16A
$V_{CE(sat)}$ ≤ 1.95V
$t_{fi(typ)}$ = 70ns



TO-263 AA (IXGA)



TO-220AB (IXGP)



TO-247 (IXGH)



G = Gate C = Collector
E = Emitter Tab = Collector

Symbol	Test Conditions	Maximum Ratings	
V_{CES}	T_J = 25°C to 150°C	600	V
V_{CGR}	T_J = 25°C to 150°C, R_{GE} = 1MΩ	600	V
V_{GES}	Continuous	±20	V
V_{GEM}	Transient	±30	V
I_{C25}	T_C = 25°C (Chip Capability)	40	A
I_{C110}	T_C = 110°C	16	A
I_{F110}	T_C = 110°C	11	A
I_{CM}	T_C = 25°C, 1ms	100	A
SSOA (RBSOA)	V_{GE} = 15V, T_J = 125°C, R_G = 22Ω Clamped Inductive load	I_{CM} = 32 $V_{CE} \leq V_{CES}$	A
P_C	T_C = 25°C	150	W
T_J		-55 ... +150	°C
T_{JM}		150	°C
T_{stg}		-55 ... +150	°C
M_d	Mounting Torque (TO-220 & TO-247)	1.13/10	Nm/lb.in.
F_C	Mounting Force (TO-263)	10..65 / 2.2..14.6	N/lb.
T_L	Maximum Lead Temperature for Soldering	300	°C
T_{SOLD}	1.6mm (0.062 in.) from Case for 10s	260	°C
Weight	TO-263	2.5	g
	TO-220	3.0	g
	TO-247	6.0	g

Symbol	Test Conditions (T_J = 25°C, Unless Otherwise Specified)	Characteristic Values Min.	Typ.	Max.	
$V_{GE(th)}$	I_C = 250μA, V_{CE} = V_{GE}	3.0		5.5	V
I_{CES}	V_{CE} = V_{CES}, V_{GE} = 0V			25	μA
	T_J = 125°C			1	mA
I_{GES}	V_{CE} = 0V, V_{GE} = ±20V			±100	nA
$V_{CE(sat)}$	I_C = 12A, V_{GE} = 15V, Note1			1.95	V
	T_J = 125°C		1.65		V

Features

- Optimized for Low Conduction and Switching Losses
- Square RBSOA
- Anti-Parallel Ultra Fast Diode
- International Standard Packages

Advantages

- High Power Density
- Low Gate Drive Requirement

Applications

- Power Inverters
- UPS
- Motor Drives
- SMPS
- PFC Circuits
- Battery Chargers
- Welding Machines
- Lamp Ballasts

© 2013 IXYS CORPORATION, All Rights Reserved

Symbol	Test Conditions (T_J = 25°C, Unless Otherwise Specified)	Characteristic Values Min.	Typ.	Max.	
g_{fs}	I_C = 12A, V_{CE} = 10V, Note 1	8			S
C_{ies}	V_{CE} = 25V, V_{GE} = 0V, f = 1MHz		675		pF
C_{oes}			70		pF
C_{res}			20		pF
$Q_{g(on)}$	I_C = 12A, V_{GE} = 15V, V_{CE} = 0.5 • V_{CES}		24		nC
Q_{ge}			5		nC
Q_{gc}			13		nC
$t_{d(on)}$	**Inductive load, T_J = 25°C**		18		ns
t_{ri}	I_C = 12A, V_{GE} = 15V		20		ns
E_{on}	V_{CE} = 400V, R_G = 22Ω		0.16		mJ
$t_{d(off)}$	Note 2		73		ns
t_{fi}			70		ns
E_{off}			0.12	0.22	mJ
$t_{d(on)}$	**Inductive load, T_J = 125°C**		17		ns
t_{ri}	I_C = 12A, V_{GE} = 15V		20		ns
E_{on}	V_{CE} = 400V, R_G = 22Ω		0.26		mJ
$t_{d(off)}$	Note 2		140		ns
t_{fi}			125		ns
E_{off}			0.38		mJ
R_{thJC}				0.83	°C/W
R_{thCK}	TO-220		0.50		°C/W
	TO-247		0.21		°C/W

Reverse Diode (FRED)

Symbol	Test Conditions (T_J = 25°C, Unless Otherwise Specified)	Characteristic Values Min.	Typ.	Max.	
V_F	I_F = 10A, V_{GE} = 0V, Note 1			3.0	V
	T_J = 125°C		1.7		V
I_{RM}	I_F = 12A, V_{GE} = 0V, $-di_F/dt$ = 100A/μs, V_R = 100V, T_J = 125°C		2.5		A
t_{rr}			110		ns
t_{rr}	I_F = 1A, V_{GE} = 0V, $-di_F/dt$ = 100A/μs, V_R = 30V		30		ns
R_{thJC}				2.5	°C/W

Notes:

1. Pulse test, t ≤ 300μs, duty cycle, d ≤ 2%.
2. Switching times & energy losses may increase for higher V_{CE}(Clamp), T_J or R_G.

IXYS Reserves the Right to Change Limits, Test Conditions, and Dimensions.

IXYS MOSFETs and IGBTs are covered by one or more of the following U.S. patents: 4,835,592 4,931,844 5,049,961 5,237,481 6,162,665 6,404,065 B1 6,683,344 6,727,585 7,005,734 B2 7,157,338B2 4,860,072 5,017,508 5,063,307 5,381,025 6,259,123 B1 6,534,343 6,710,405 B2 6,759,692 7,063,975 B2 4,881,106 5,034,796 5,187,117 5,486,715 6,306,728 B1 6,583,505 6,710,463 6,771,478 B2 7,071,537

TO-263 (IXGA) Outline

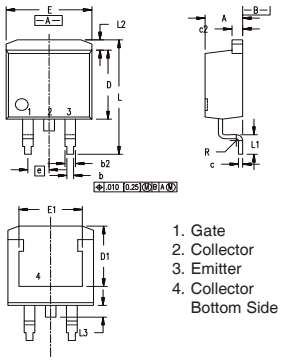

1. Gate
2. Collector
3. Emitter
4. Collector
Bottom Side

Dim.	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	4.06	4.83	.160	.190
b	0.51	0.99	.020	.039
b2	1.14	1.40	.045	.055
c	0.40	0.74	.016	.029
c2	1.14	1.40	.045	.055
D	8.64	9.65	.340	.380
D1	8.00	8.89	.280	.320
E	9.65	10.41	.380	.405
E1	6.22	8.13	.270	.320
e	2.54	BSC	.100	BSC
L	14.61	15.88	.575	.625
L1	2.29	2.79	.090	.110
L2	1.02	1.40	.040	.055
L3	1.27	1.78	.050	.070
L4	0	0.13	0	.005

TO-220 (IXGP) Outline



Pins: 1 - Gate 2 - Collector
3 - Emitter

SYM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.170	.190	4.32	4.83
b	.025	.040	0.64	1.02
b1	.045	.065	1.15	1.65
c	.014	.022	0.35	0.56
D	.580	.630	14.73	16.00
E	.390	.420	9.91	10.66
e	.100 BSC		2.54 BSC	
F	.045	.055	1.14	1.40
H1	.230	.270	5.85	6.85
J1	.090	.110	2.29	2.79
k	0	.015	0	0.38
L	.500	.550	12.70	13.97
L1	.110	.230	2.79	5.84
ØP	.139	.161	3.53	4.08
Q	.100	.125	2.54	3.18

TO-247 (IXGH) AD Outline

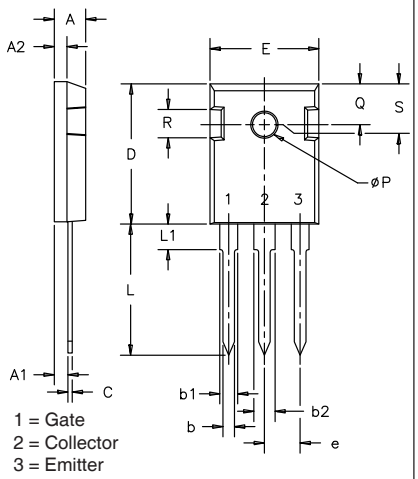

1 = Gate
2 = Collector
3 = Emitter

SYM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.185	.209	4.7	5.3
A_1	.087	.102	2.2	2.54
A_2	.059	.098	2.2	2.6
b	.040	.055	1.0	1.4
b_1	.065	.084	1.65	2.13
b_2	.113	.123	2.87	3.12
C	.016	.031	.4	.8
D	.819	.845	20.80	21.46
E	.610	.640	15.75	16.26
e	.215 BSC		5.45 BSC	
L	.780	.800	19.81	20.32
L1		.177		4.50
øP	.140	.144	3.55	3.65
Q	.212	.244	5.4	6.2
R	.170	.216	4.32	5.49
S	.242 BSC		6.15 BSC	

© 2013 IXYS CORPORATION, All Rights Reserved

Fig. 1. Output Characteristics @ T_J = 25ºC

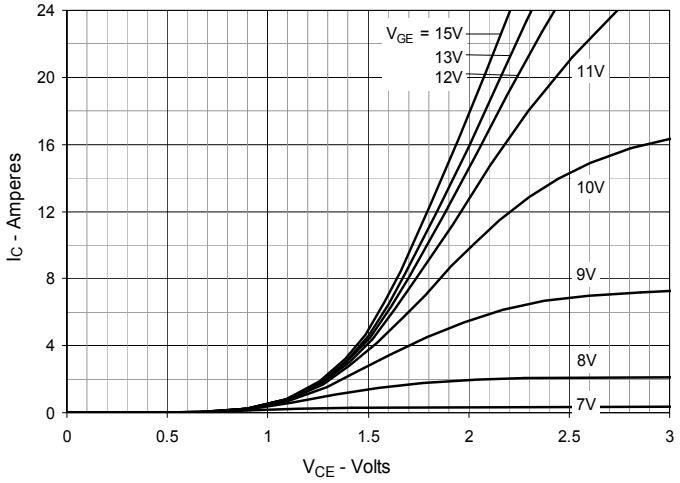

Fig. 2. Extended Output Characteristics @ T_J = 25ºC

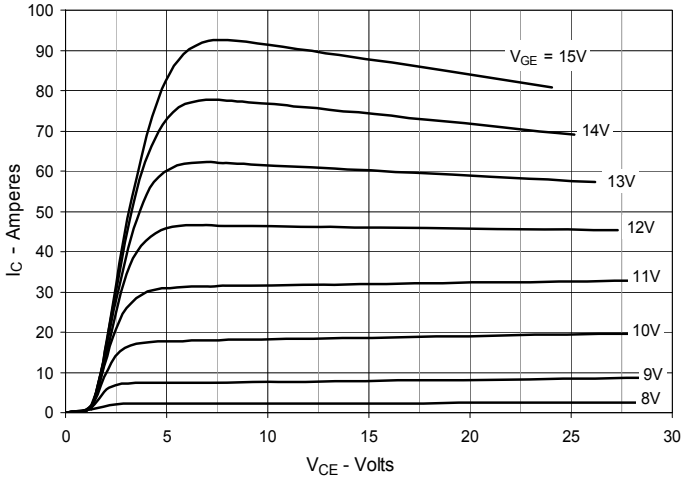

Fig. 3. Output Characteristics @ T_J = 125ºC

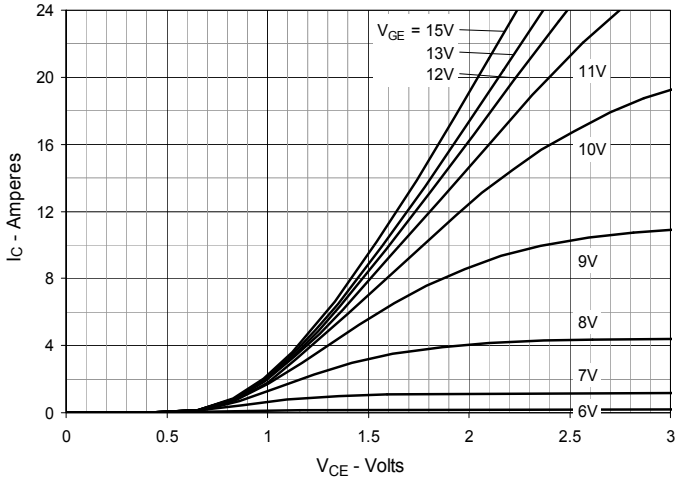

Fig. 4. Dependence of $V_{CE(sat)}$ on Junction Temperature

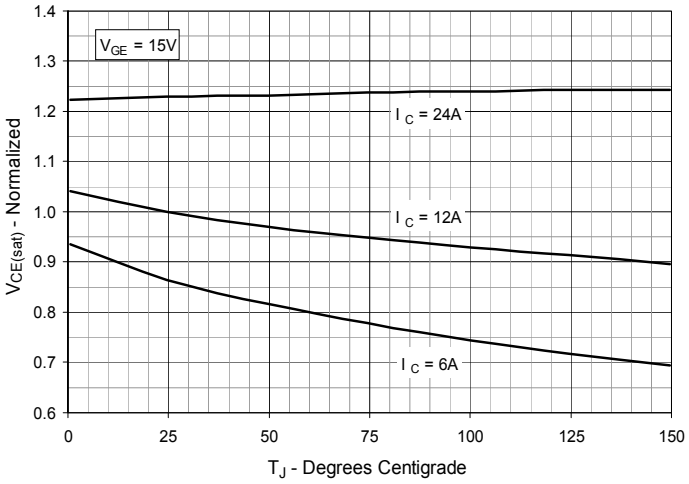

Fig. 5. Collector-to-Emitter Voltage vs. Gate-to-Emitter Voltage

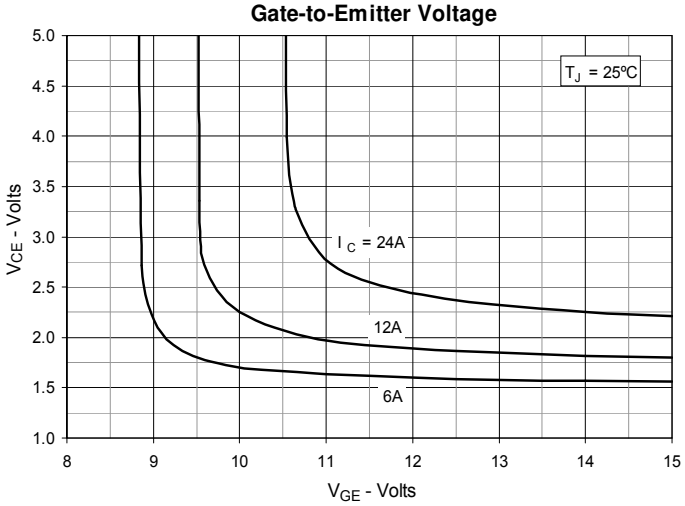

Fig. 6. Input Admittance

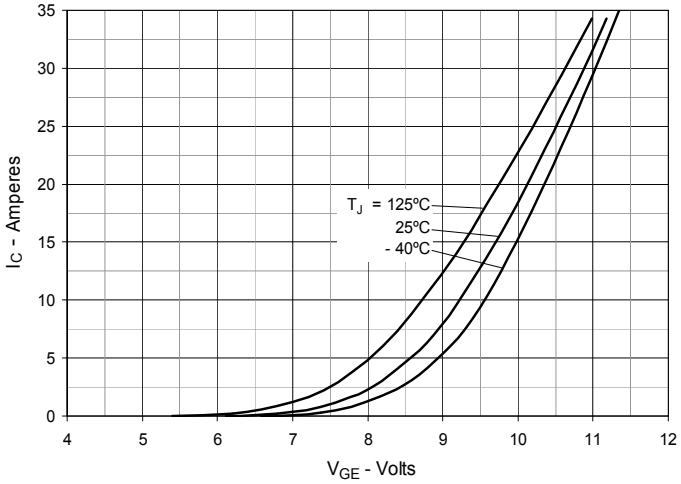

IXYS Reserves the Right to Change Limits, Test Conditions, and Dimensions.

Fig. 7. Transconductance

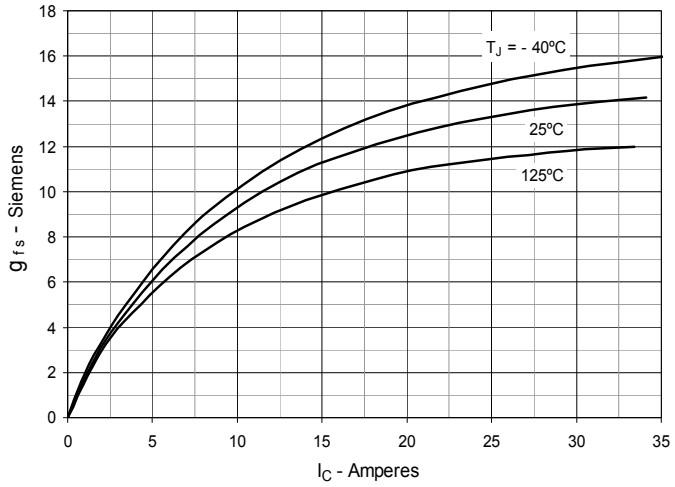

Fig. 8. Gate Charge

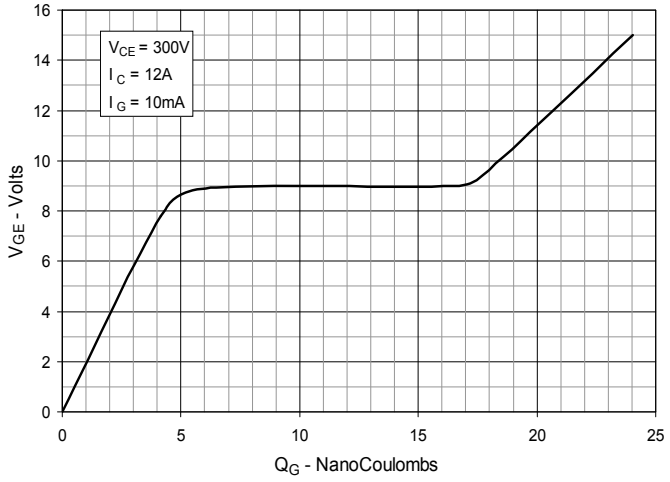

Fig. 9. Capacitance

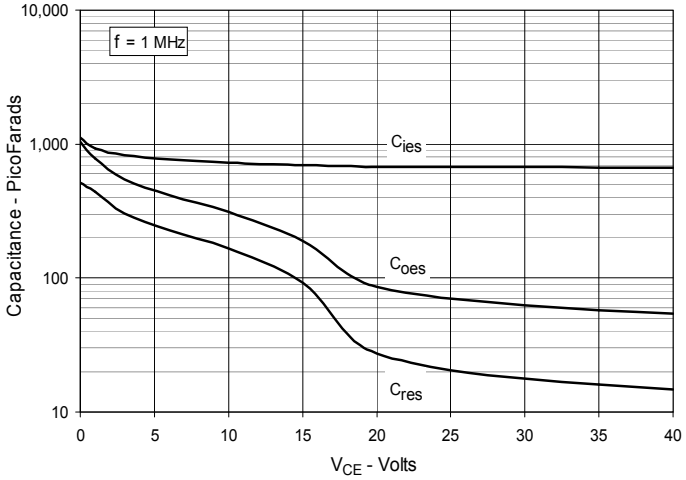

Fig. 10. Reverse-Bias Safe Operating Area

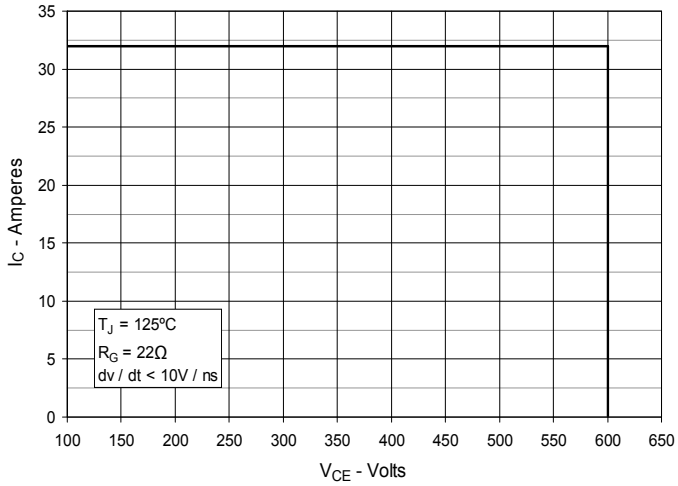

Fig. 11. Maximum Transient Thermal Impedance

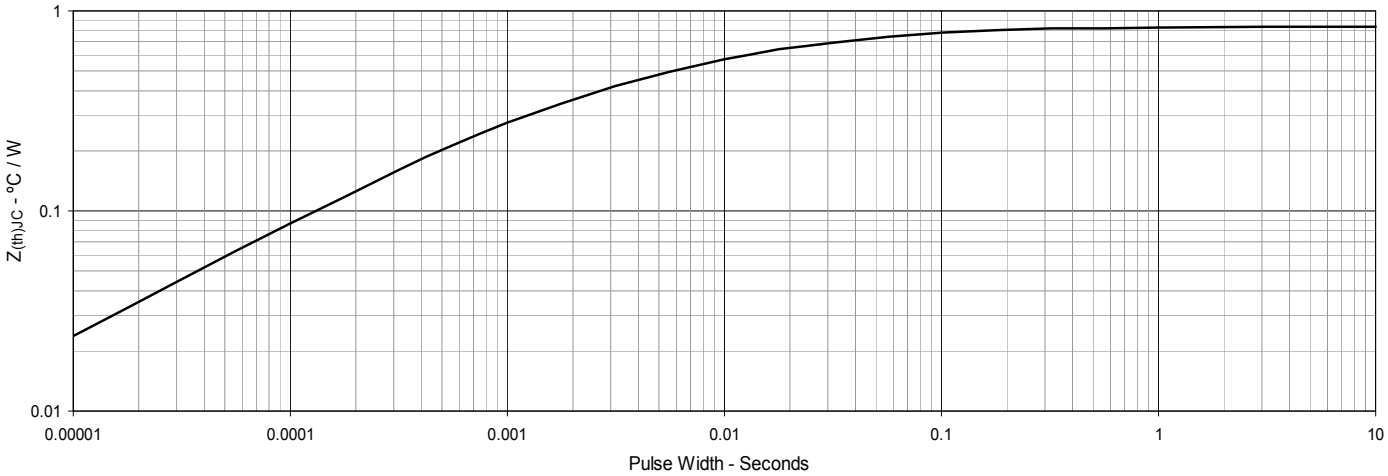

© 2013 IXYS CORPORATION, All Rights Reserved

Fig. 12. Inductive Switching Energy Loss vs. Gate Resistance

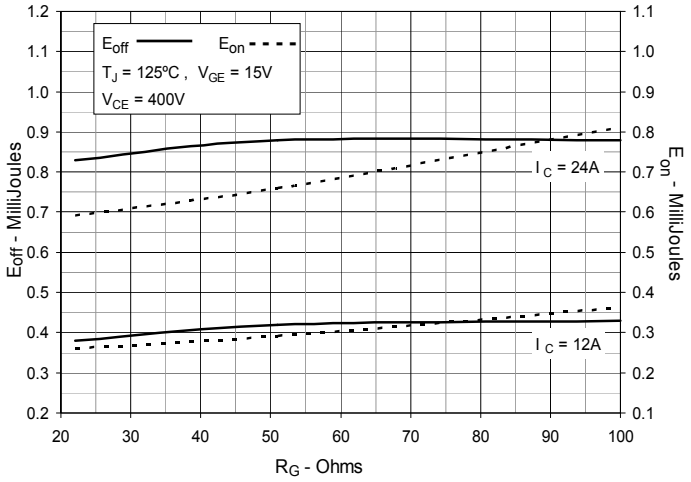

Fig. 13. Inductive Switching Energy Loss vs. Collector Current

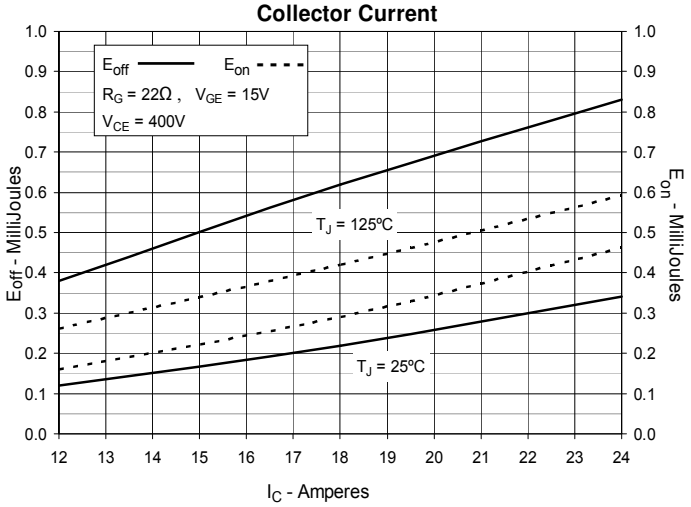

Fig. 14. Inductive Switching Energy Loss vs. Junction Temperature

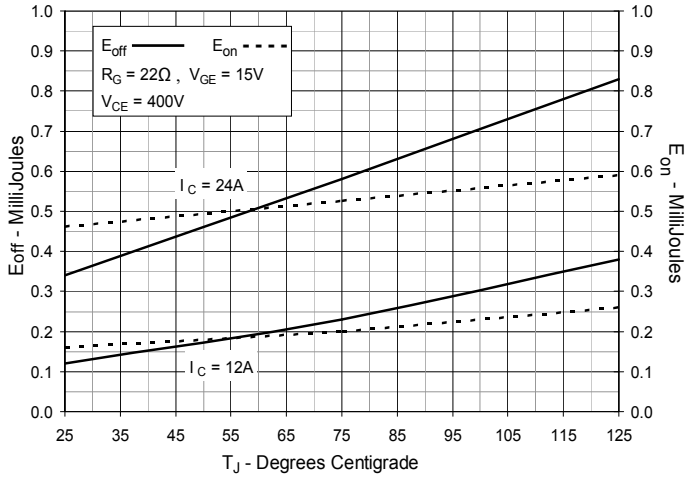

Fig. 15. Inductive Turn-off Switching Times vs. Gate Resistance

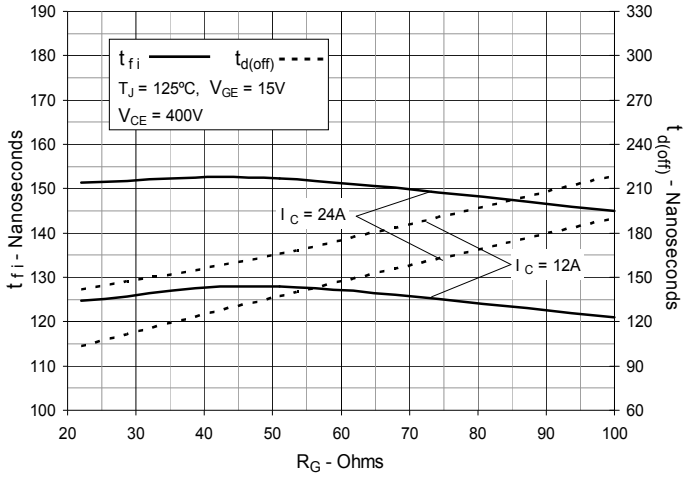

Fig. 16. Inductive Turn-off Switching Times vs. Collector Current

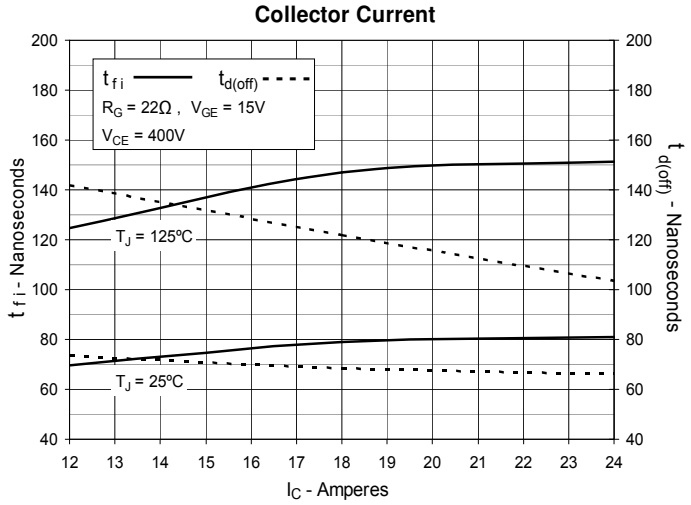

Fig. 17. Inductive Turn-off Switching Times vs. Junction Temperature

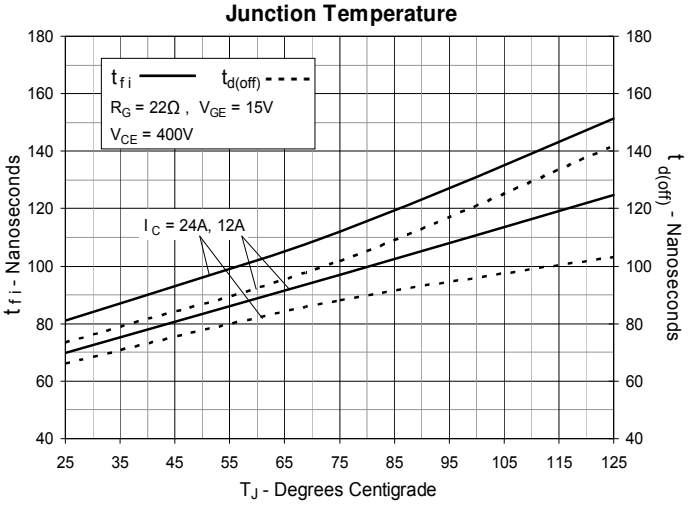

IXYS Reserves the Right to Change Limits, Test Conditions, and Dimensions.

Fig. 18. Inductive Turn-on Switching Times vs. Gate Resistance

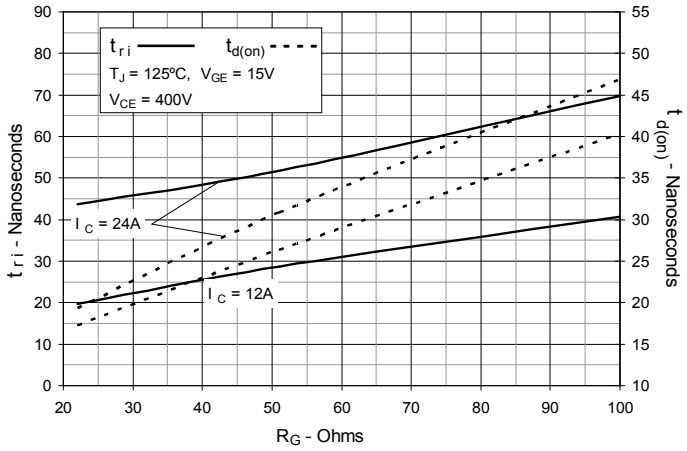

Fig. 19. Inductive Turn-on Switching Times vs. Collector Current

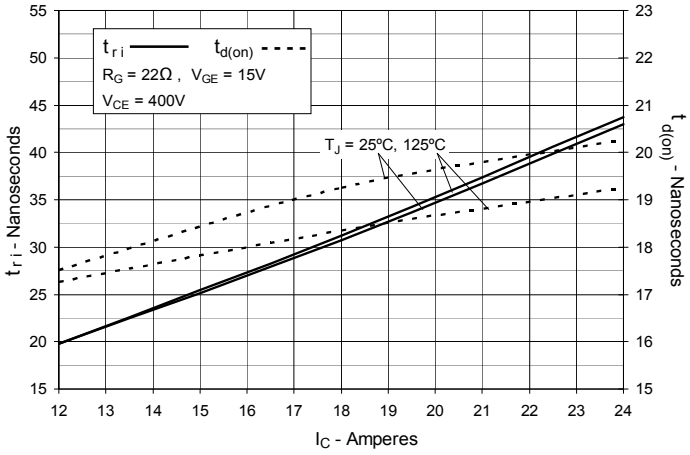

Fig. 20. Inductive Turn-on Switching Times vs. Junction Temperature

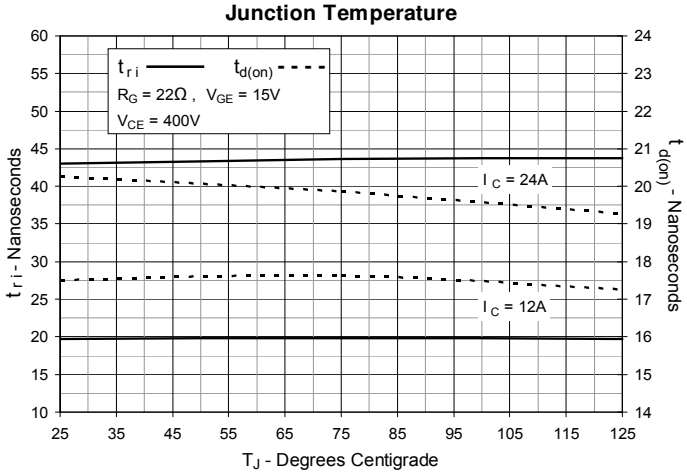

© 2013 IXYS CORPORATION, All Rights Reserved