



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: [info@chipsmall.com](mailto:info@chipsmall.com) Web: [www.chipsmall.com](http://www.chipsmall.com)

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




## High Speed IGBT with Diode

**IXSH 30N60B2D1**  
**IXST 30N60B2D1**

$$\begin{aligned} V_{CES} &= 600 \text{ V} \\ I_{C25} &= 48 \text{ A} \\ V_{CE(sat)} &= 2.5 \text{ V} \end{aligned}$$


Short Circuit SOA Capability

Preliminary Data Sheet




| Symbol                                                                          | Test Conditions                                                                                                | Maximum Ratings                  |                  |
|---------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|----------------------------------|------------------|
| $V_{CES}$                                                                       | $T_J = 25^\circ\text{C to } 150^\circ\text{C}$                                                                 | 600                              | V                |
| $V_{CGR}$                                                                       | $T_J = 25^\circ\text{C to } 150^\circ\text{C}; R_{GE} = 1 \text{ M}\Omega$                                     | 600                              | V                |
| $V_{GES}$                                                                       | Continuous                                                                                                     | $\pm 20$                         | V                |
| $V_{GEM}$                                                                       | Transient                                                                                                      | $\pm 30$                         | V                |
| $I_{C25}$                                                                       | $T_C = 25^\circ\text{C}$                                                                                       | 48                               | A                |
| $I_{C110}$                                                                      | $T_C = 110^\circ\text{C}$                                                                                      | 30                               | A                |
| $I_{F(110)}$                                                                    |                                                                                                                | 28                               | A                |
| $I_{CM}$                                                                        | $T_C = 25^\circ\text{C}, 1 \text{ ms}$                                                                         | 90                               | A                |
| <b>SSOA (RBSOA)</b>                                                             | $V_{GE} = 15 \text{ V}, T_J = 125^\circ\text{C}, R_G = 10 \Omega$<br>Clamped inductive load                    | $I_{CM} = 48$<br>@ $0.8 V_{CES}$ | A                |
| <b><math>t_{SC}</math> (SCSOA)</b>                                              | $V_{GE} = 15 \text{ V}, V_{CE} = 360 \text{ V}, T_J = 125^\circ\text{C}$<br>$R_G = 10 \Omega$ , non repetitive | 10                               | $\mu\text{s}$    |
| $P_C$                                                                           | $T_C = 25^\circ\text{C}$                                                                                       | 250                              | W                |
| $T_J$                                                                           |                                                                                                                | -55 ... +150                     | $^\circ\text{C}$ |
| $T_{JM}$                                                                        |                                                                                                                | 150                              | $^\circ\text{C}$ |
| $T_{stg}$                                                                       |                                                                                                                | -55 ... +150                     | $^\circ\text{C}$ |
| <b>Weight</b>                                                                   | TO-247                                                                                                         | 6                                | g                |
|                                                                                 | TO-268                                                                                                         | 5                                | g                |
| Maximum lead temperature for soldering<br>1.6 mm (0.062 in.) from case for 10 s |                                                                                                                | 300                              | $^\circ\text{C}$ |
| Maximum tab temperature for soldering for 10s                                   |                                                                                                                | 260                              | $^\circ\text{C}$ |

TO-247 (IXSH)



TO-268 (IXST)



G = Gate      C = Collector  
E = Emitter      TAB = Collector

### Features

- International standard package
- Guaranteed Short Circuit SOA capability
- Low  $V_{CE(sat)}$ 
  - for low on-state conduction losses
- High current handling capability
- MOS Gate turn-on
  - drive simplicity
- Fast fall time for switching speeds up to 20 kHz

### Applications

- AC motor speed control
- Uninterruptible power supplies (UPS)
- Welding

### Advantages

- High power density


| Symbol        | Test Conditions                                   | Characteristic Values<br>( $T_J = 25^\circ\text{C}$ , unless otherwise specified) |      |                           |
|---------------|---------------------------------------------------|-----------------------------------------------------------------------------------|------|---------------------------|
|               |                                                   | min.                                                                              | typ. | max.                      |
| $V_{GE(th)}$  | $I_C = 750 \mu\text{A}, V_{CE} = V_{GE}$          | 4.0                                                                               |      | 7.0 V                     |
| $I_{CES}$     | $V_{CE} = V_{CES}$<br>$V_{GE} = 0 \text{ V}$      |                                                                                   |      | 150 $\mu\text{A}$<br>1 mA |
| $I_{GES}$     | $V_{CE} = 0 \text{ V}, V_{GE} = \pm 20 \text{ V}$ |                                                                                   |      | $\pm 100 \text{ nA}$      |
| $V_{CE(sat)}$ | $I_C = 24 \text{ A}, V_{GE} = 15 \text{ V}$       |                                                                                   |      | 2.5 V                     |

| Symbol       | Test Conditions                                                                                                                                                                                                                                                         | Characteristic Values<br>( $T_J = 25^\circ\text{C}$ , unless otherwise specified) |      |          |
|--------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------|----------|
|              |                                                                                                                                                                                                                                                                         | min.                                                                              | typ. | max.     |
| $g_{fs}$     | $I_C = 24\text{A}; V_{CE} = 10\text{ V}$ , Note 1                                                                                                                                                                                                                       | 7.0                                                                               | 12.0 | S        |
| $C_{ies}$    | $V_{CE} = 25\text{ V}, V_{GE} = 0\text{ V}$<br>$f = 1\text{ MHz}$<br>20N60B2D1                                                                                                                                                                                          |                                                                                   | 1220 | pF       |
| $C_{oes}$    |                                                                                                                                                                                                                                                                         |                                                                                   | 110  | pF       |
| $C_{res}$    |                                                                                                                                                                                                                                                                         |                                                                                   | 140  | pF       |
|              |                                                                                                                                                                                                                                                                         |                                                                                   | 42   | pF       |
| $Q_g$        | $I_C = 24\text{A}, V_{GE} = 15\text{ V}, V_{CE} = 0.5 V_{CES}$                                                                                                                                                                                                          |                                                                                   | 50   | nC       |
| $Q_{ge}$     |                                                                                                                                                                                                                                                                         |                                                                                   | 23   | nC       |
| $Q_{gc}$     |                                                                                                                                                                                                                                                                         |                                                                                   | 15   | nC       |
| $t_{d(on)}$  | <b>Inductive load, <math>T_J = 25^\circ\text{C}</math></b><br>$I_C = 24\text{A}, V_{GE} = 15\text{ V}$<br>$V_{CE} = 400\text{ V}, R_G = 5\ \Omega$<br>Switching times may increase for $V_{CE}$<br>(Clamp) $> 0.8 \cdot V_{CES}$ , higher $T_J$ or<br>increased $R_G$   |                                                                                   | 30   | ns       |
| $t_{ri}$     |                                                                                                                                                                                                                                                                         |                                                                                   | 30   | ns       |
| $t_{d(off)}$ |                                                                                                                                                                                                                                                                         |                                                                                   | 130  | 280 ns   |
| $t_{fi}$     |                                                                                                                                                                                                                                                                         |                                                                                   | 140  | 300 ns   |
| $E_{off}$    |                                                                                                                                                                                                                                                                         |                                                                                   | 0.55 | 1.0 mJ   |
|              |                                                                                                                                                                                                                                                                         |                                                                                   |      |          |
| $t_{d(on)}$  | <b>Inductive load, <math>T_J = 125^\circ\text{C}</math></b><br>$I_C = 24\text{ A}, V_{GE} = 15\text{ V}$<br>$V_{CE} = 400\text{ V}, R_G = 5\ \Omega$<br>Switching times may increase for<br>$V_{CE}$ (Clamp) $> 0.8 \cdot V_{CES}$ , higher $T_J$<br>or increased $R_G$ |                                                                                   | 30   | ns       |
| $t_{ri}$     |                                                                                                                                                                                                                                                                         |                                                                                   | 50   | ns       |
| $E_{on}$     |                                                                                                                                                                                                                                                                         |                                                                                   | 0.32 | mJ       |
|              |                                                                                                                                                                                                                                                                         |                                                                                   | 0.82 | mJ       |
| $t_{d(off)}$ |                                                                                                                                                                                                                                                                         |                                                                                   | 202  | ns       |
| $t_{fi}$     |                                                                                                                                                                                                                                                                         |                                                                                   | 234  | ns       |
| $E_{off}$    |                                                                                                                                                                                                                                                                         |                                                                                   | 1.18 | mJ       |
| $R_{thJC}$   |                                                                                                                                                                                                                                                                         |                                                                                   |      | 0.50 K/W |
| $R_{thCS}$   |                                                                                                                                                                                                                                                                         |                                                                                   | 0.21 | K/W      |


| Symbol     | Test Conditions                                                                                           | Characteristic Values<br>( $T_J = 25^\circ\text{C}$ , unless otherwise specified) |      |                |
|------------|-----------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------|----------------|
|            |                                                                                                           | min.                                                                              | typ. | max.           |
| $V_F$      | $I_F = 30\text{A}, V_{GE} = 0\text{ V}$<br>$T_J = 150^\circ\text{C}$                                      |                                                                                   |      | 1.6 V<br>2.5 V |
| $I_{RM}$   | $I_F = 50\text{A}, V_{GE} = 0\text{ V}, -di_F/dt = 100\text{ A}/\mu\text{s}$<br>$T_J = 100^\circ\text{C}$ |                                                                                   | 2.0  | 2.5 A          |
| $t_{rr}$   | $V_R = 100\text{ V}$<br>$T_J = 100^\circ\text{C}$                                                         |                                                                                   | 150  | ns             |
| $t_{rr}$   | $I_F = 1\text{ A}; -di/dt = 100\text{ A}/\mu\text{s}; V_R = 30\text{ V}$                                  |                                                                                   | 30   | ns             |
| $R_{thJC}$ |                                                                                                           |                                                                                   |      | 0.9 K/W        |

Note 1: Pulse test,  $t \leq 300\ \mu\text{s}$ , duty cycle  $d \leq 2\%$


### TO-247 (IXSH) Outline




**Fig. 1. Output Characteristics**  
**@ 25 °C**

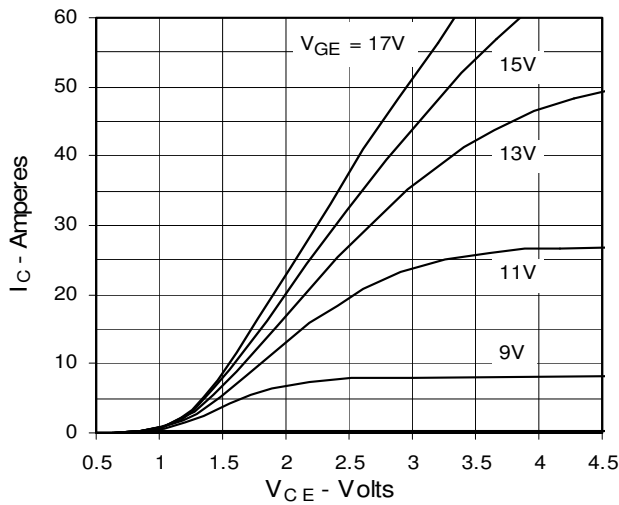


**Fig. 2. Extended Output Characteristics**  
**@ 25 °C**

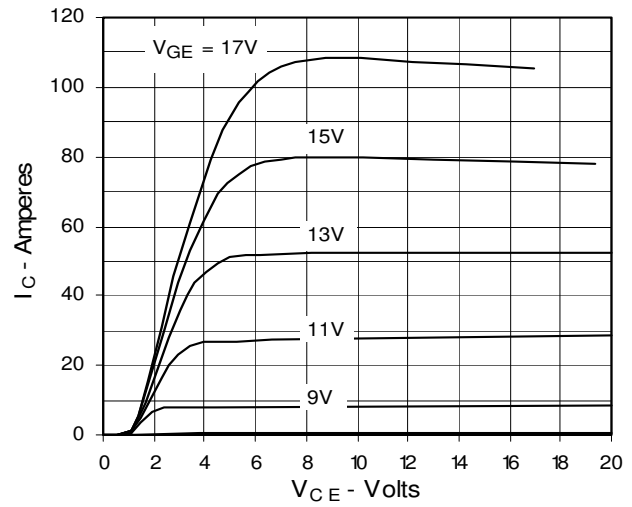


**Fig. 3. Output Characteristics**  
**@ 125 °C**

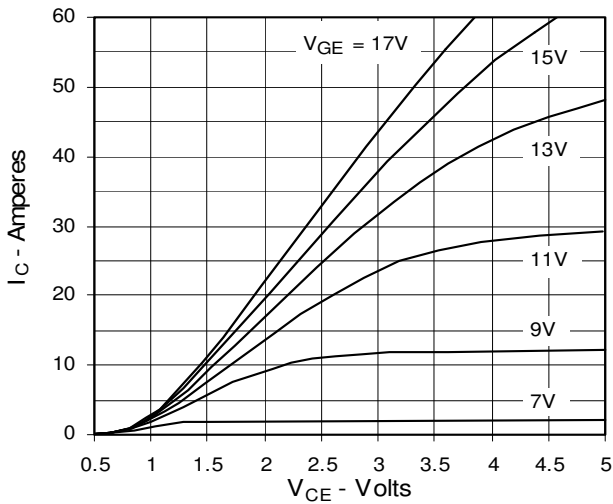

**Fig. 4. Dependence of  $V_{CE(sat)}$  on Temperature**

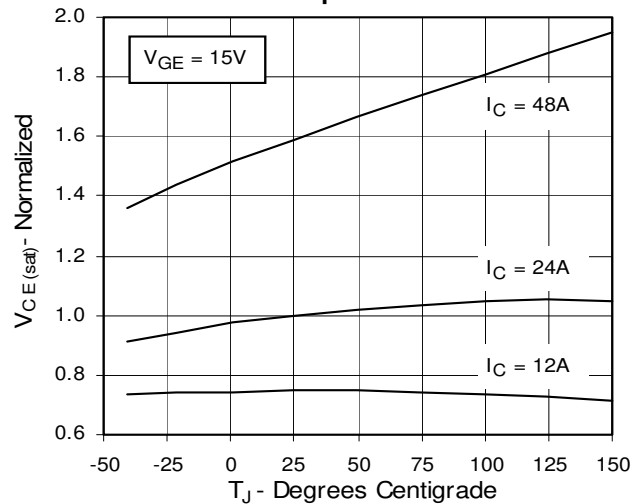

**Fig. 5. Collector-to-Emitter Voltage vs. Gate-to-Emitter voltage**

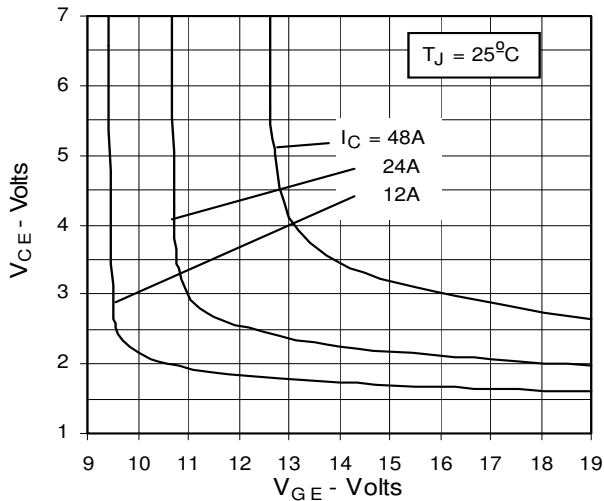

**Fig. 6. Input Admittance**

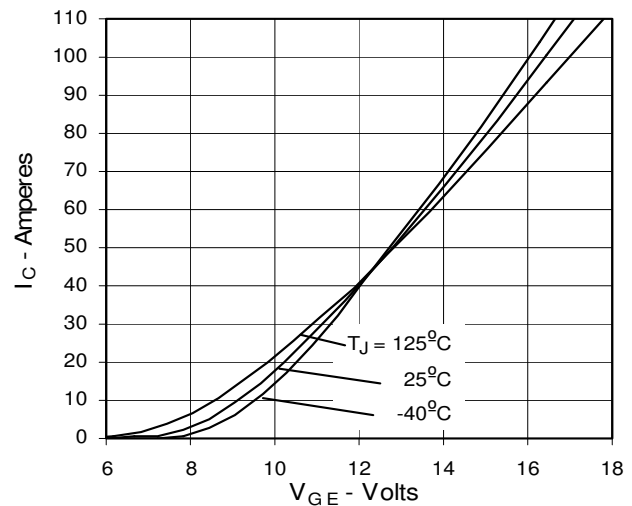


Fig. 7. Transconductance

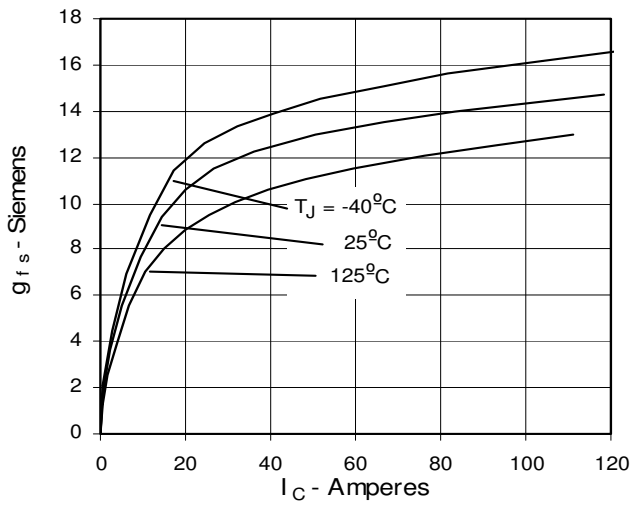


Fig. 8. Dependence of Turn-off Energy Loss on  $R_G$

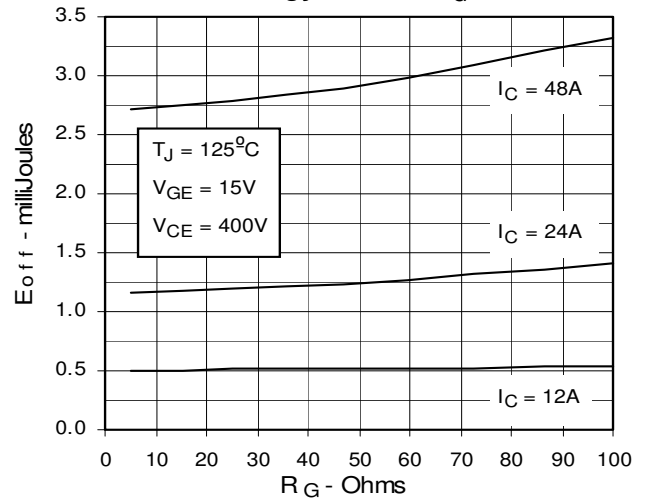


Fig. 9. Dependence of Turn-Off Energy Loss on  $I_C$

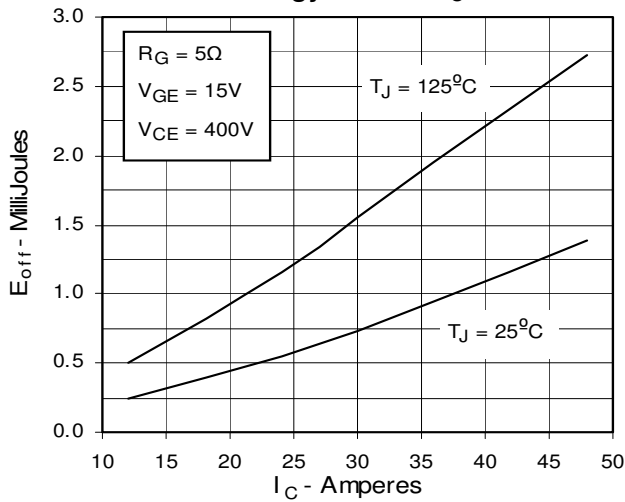


Fig. 10. Dependence of Turn-off Energy Loss on Temperature

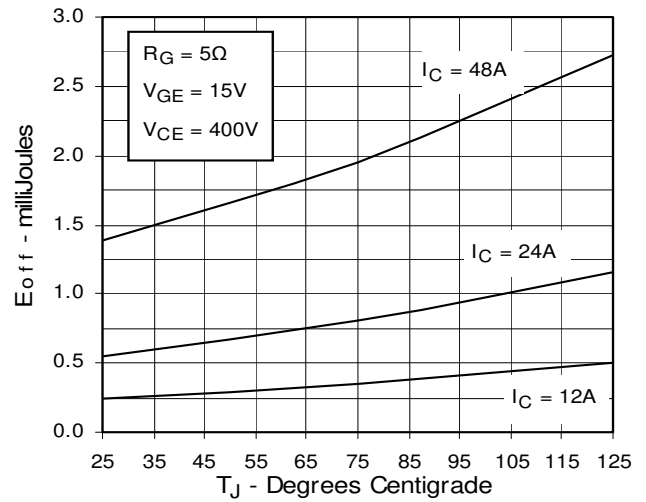


Fig. 11. Dependence of Turn-off Switching Time on  $R_G$



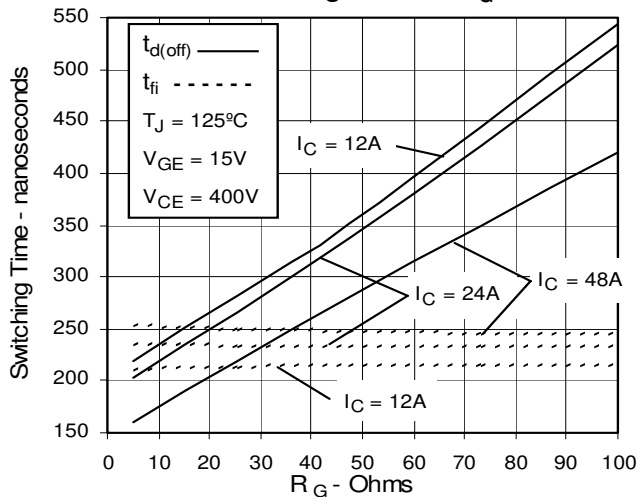



Fig. 12. Dependence of Turn-off Switching Time on  $I_C$

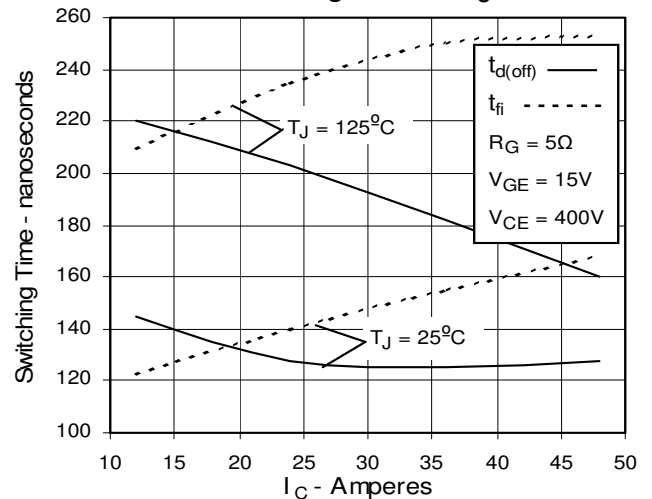


**Fig. 13. Dependence of Turn-off Switching Time on Temperature**

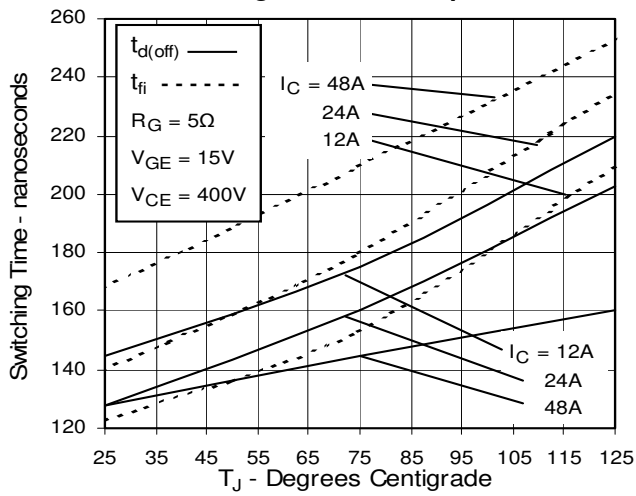


**Fig. 14. Gate Charge**

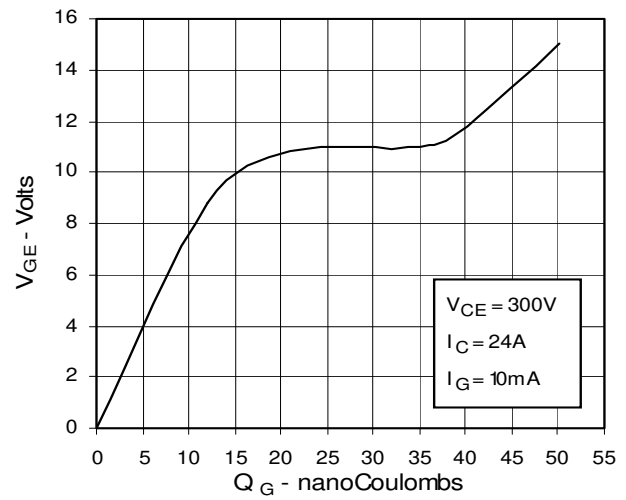


**Fig. 15. Capacitance**

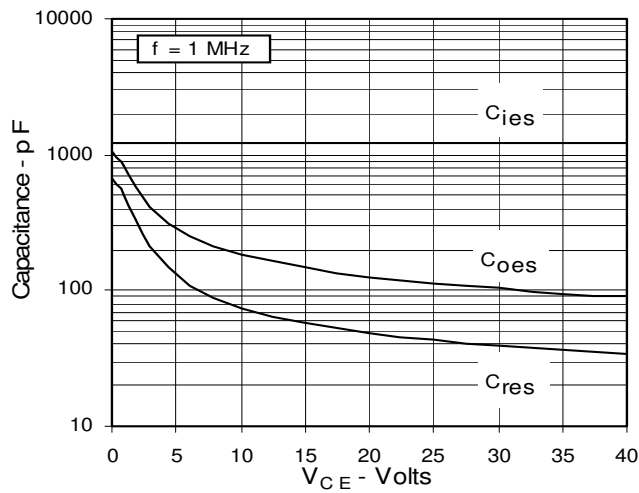


**Fig. 16. Reverse-Bias Safe Operating Area**

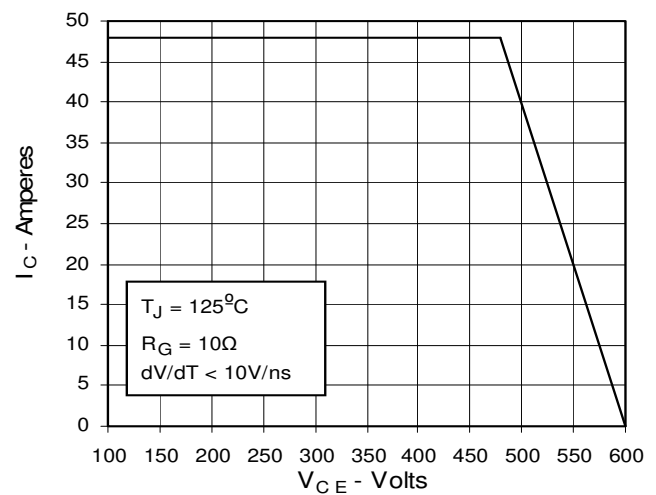


**Fig. 17. Maximum Transient Thermal Resistance**

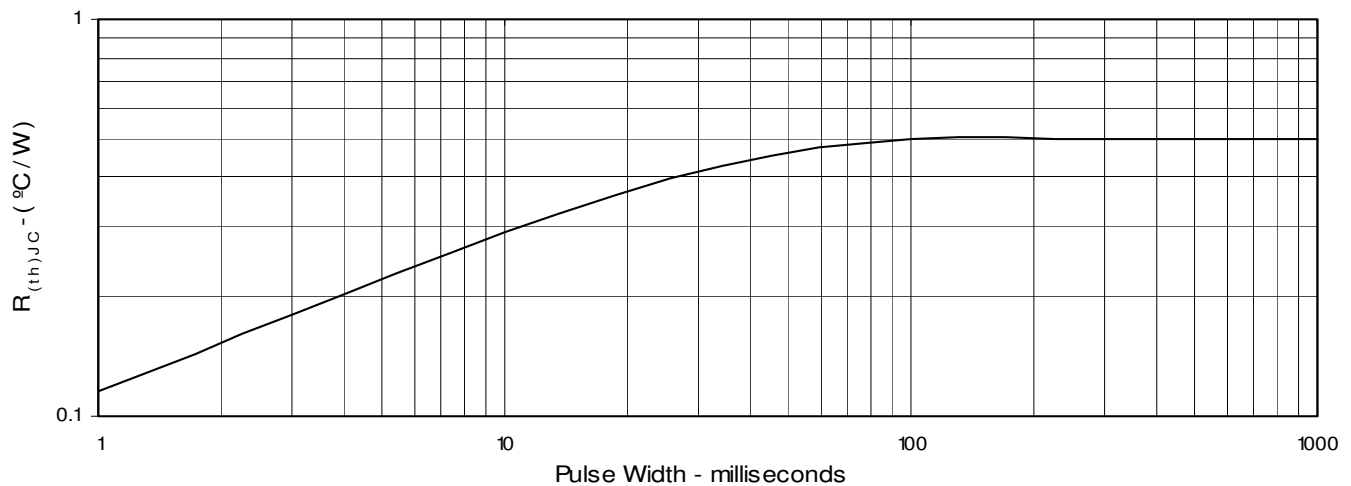


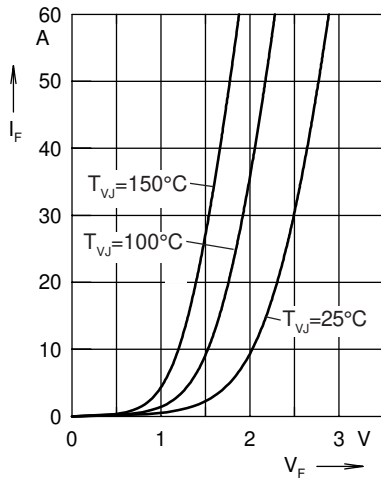


**Fig. 18. Forward current  $I_F$  versus  $V_F$**

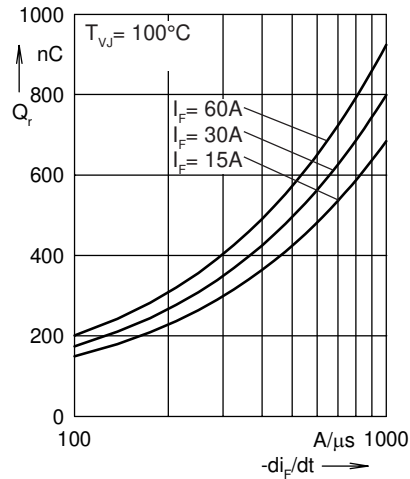


**Fig. 19. Reverse recovery charge**

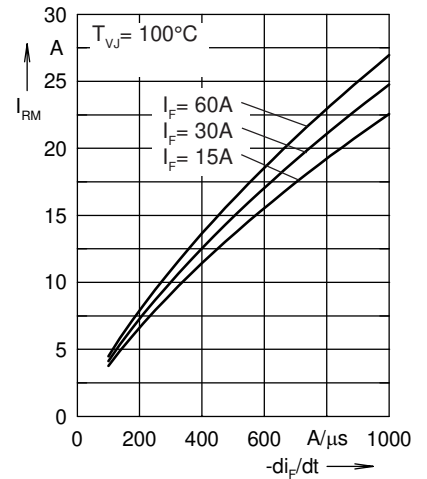


**Fig. 20. Peak reverse current  $I_{RM}$**

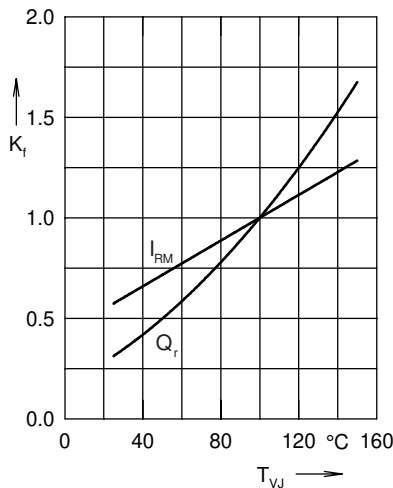


**Fig. 21. Dynamic parameters  $Q_r$ ,  $I_{RM}$**

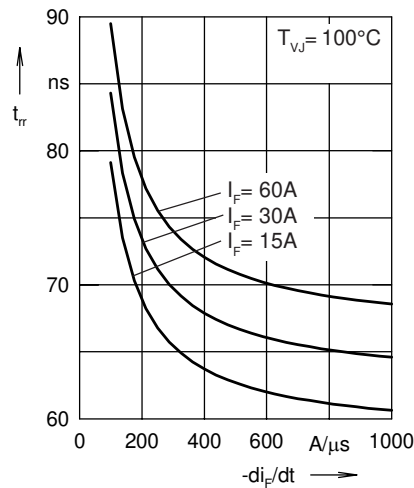

**Fig. 22. Recovery time  $t_{rr}$  versus**

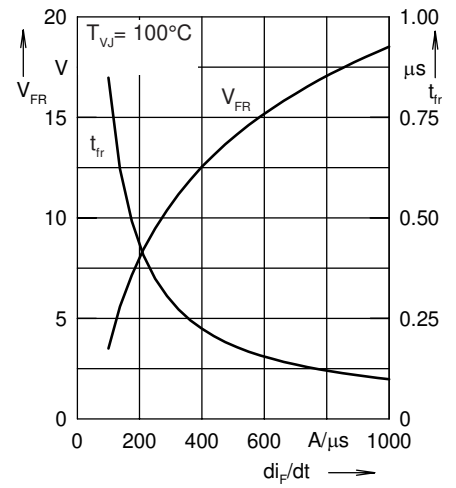

**Fig. 23. Peak forward voltage  $V_{FR}$**

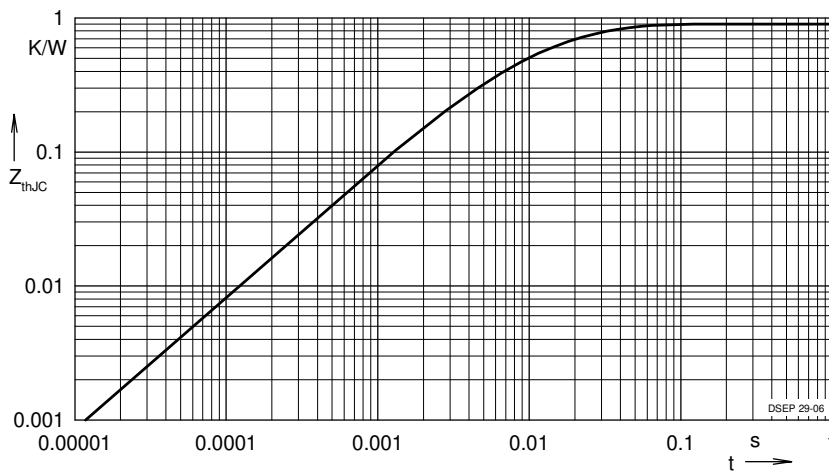

**Fig. 24. Transient thermal resistance junction to case**

Constants for  $Z_{thJC}$  calculation:

| i | $R_{thi}$ (K/W) | $t_i$ (s) |
|---|-----------------|-----------|
| 1 | 0.502           | 0.0052    |
| 2 | 0.193           | 0.0003    |