



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





High Reliability Silicon Power Rectifier

Qualified per MIL-PRF-19500/297

*Qualified Levels:
JAN, JANTX, and
JANTXV*

DESCRIPTION

This series of silicon power rectifier part numbers are qualified up to the JANTXV level for high reliability applications. They are constructed with glass passivated die and feature glass to metal seal construction. They have a 500 amp surge rating and provide a V_{RWM} up to 1000 volts.

Important: For the latest information, visit our website <http://www.microsemi.com>.

FEATURES

- High continuous current rating.
- Very low forward voltage.
- Low thermal resistance.
- JAN, JANTX and JANTXV qualifications are available per MIL-PRF-19500/297.
- RoHS compliant devices available (commercial grade only).

APPLICATIONS / BENEFITS

- High frequency switching circuits.
- Mechanically rugged DO-5 package.

MAXIMUM RATINGS @ $T_A = +25^\circ\text{C}$ unless otherwise stated

Parameters/Test Conditions	Symbol	Value	Unit
Junction and Storage Temperature	T_J and T_{STG}	-65 to +175	$^\circ\text{C}$
Thermal Resistance Junction-to-Case	$R_{\theta JC}$	0.8	$^\circ\text{C/W}$
Working Peak Reverse Voltage	V_{RWM}	100 200 400 600 800 1000	V
Maximum Average DC Output Current @ $T_C = 150^\circ\text{C}$ ⁽¹⁾	I_O	35	A
Non-Repetitive Sinusoidal Surge Current @ 1/120 s, $T_C = 150^\circ\text{C}$	I_{FSM}	500	A

NOTE: 1. Derate linearly 1.4 A $^\circ\text{C}$ between $T_C = 150^\circ\text{C}$ to $T_C = 175^\circ\text{C}$.



**DO-5 (DO-203AB)
Package**

MSC – Lawrence

6 Lake Street,
Lawrence, MA 01841
1-800-446-1158
(978) 620-2600
Fax: (978) 689-0803

MSC – Ireland


Gort Road Business Park,
Ennis, Co. Clare, Ireland
Tel: +353 (0) 65 6840044
Fax: +353 (0) 65 6822298

Website:

www.microsemi.com

MECHANICAL and PACKAGING

- CASE: Hermetically sealed metal and glass case body.
- TERMINALS: Hot solder dip (Sn63/Pb37) on standard commercial, JAN, JANTX, and JANTXV levels. RoHS compliant matte-tin on nickel is available on commercial grade only.
- MARKING: Polarity symbol and part number.
- POLARITY: Standard polarity devices are cathode to stud. Reverse polarity devices are anode to stud.
- WEIGHT: Approximately 14 grams.
- See [Package Dimensions](#) on last page.

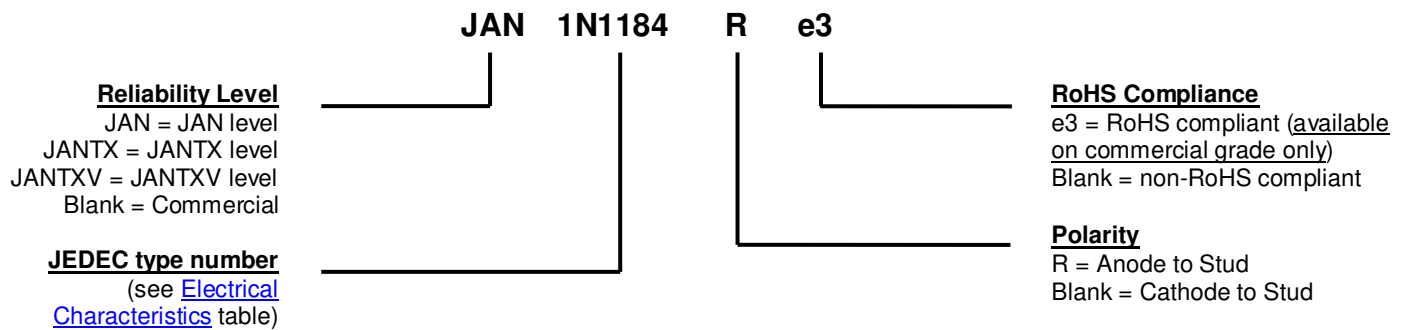PART NOMENCLATURE

SYMBOLS & DEFINITIONS

Symbol	Definition
I_F	Forward Current: The forward current dc value, no alternating component.
I_{FSM}	Maximum Forward Surge Current: The forward current, surge peak or rated forward surge current.
I_o	Average Rectified Output Current: The output current averaged over a full cycle with a 50 Hz or 60 Hz sine-wave input and a 180 degree conduction angle.
I_R	Reverse Current: The maximum reverse (leakage) current that will flow at the specified voltage and temperature.
V_F	Maximum Forward Voltage: The maximum forward voltage the device will exhibit at a specified current.
V_{RWM}	Working Peak Reverse Voltage: The maximum peak voltage that can be applied over the operating temperature range excluding all transient voltages (ref JESD282-B). Also sometimes known as PIV.

ELECTRICAL CHARACTERISTICS

Parameters / Test Conditions	Symbol	Min.	Max.	Unit
Forward Voltage $I_F = 110 \text{ A}, T_C = 25 \text{ }^\circ\text{C}^{(1)}$	V_F		1.4	V
Forward Voltage $I_F = 500 \text{ A}, T_C = 150 \text{ }^\circ\text{C}^{(2)}$	V_F		2.3	V
Reverse Current $V_{RWM} = 100 \text{ V}, T_J = 25 \text{ }^\circ\text{C}$ $V_{RWM} = 200 \text{ V}, T_J = 25 \text{ }^\circ\text{C}$ $V_{RWM} = 400 \text{ V}, T_J = 25 \text{ }^\circ\text{C}$ $V_{RWM} = 600 \text{ V}, T_J = 25 \text{ }^\circ\text{C}$ $V_{RWM} = 800 \text{ V}, T_J = 25 \text{ }^\circ\text{C}$ $V_{RWM} = 1000 \text{ V}, T_J = 25 \text{ }^\circ\text{C}$	I_R		10	μA
Reverse Current $V_{RWM} = 100 \text{ V}, T_J = 150 \text{ }^\circ\text{C}$ $V_{RWM} = 200 \text{ V}, T_J = 150 \text{ }^\circ\text{C}$ $V_{RWM} = 400 \text{ V}, T_J = 150 \text{ }^\circ\text{C}$ $V_{RWM} = 600 \text{ V}, T_J = 150 \text{ }^\circ\text{C}$ $V_{RWM} = 800 \text{ V}, T_J = 150 \text{ }^\circ\text{C}$ $V_{RWM} = 1000 \text{ V}, T_J = 150 \text{ }^\circ\text{C}$	I_R		1	mA

NOTES:

- $t_p < 8.3 \text{ ms}$, duty cycle ≤ 2 percent pulse.
- V_F shall be performed with either $t_p = 800 \text{ } \mu\text{s}$ or $t_p = 8.3 \text{ ms}$.

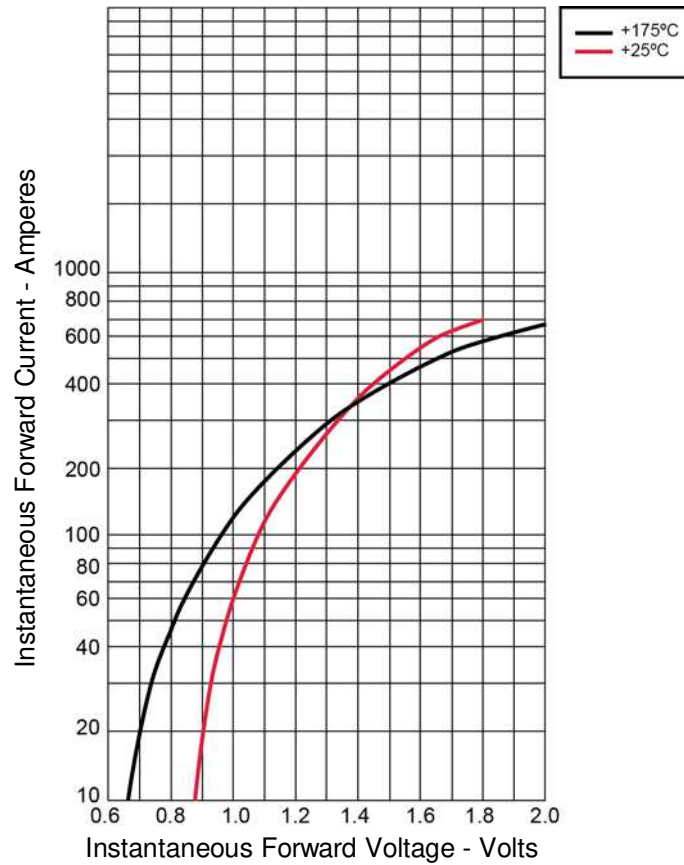
GRAPHS


FIGURE 1
Typical Forward Characteristics

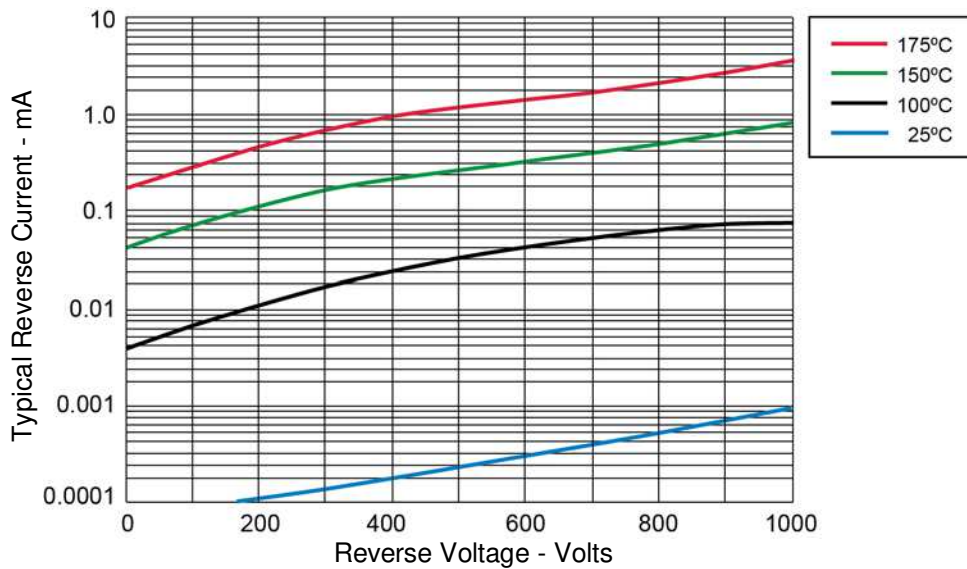


FIGURE 2
Typical Reverse Characteristics

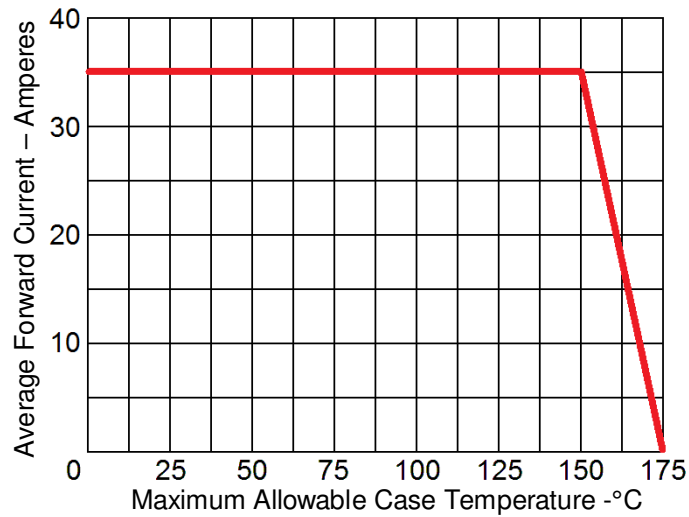
GRAPHS (continued)


FIGURE 3
Forward Current Derating

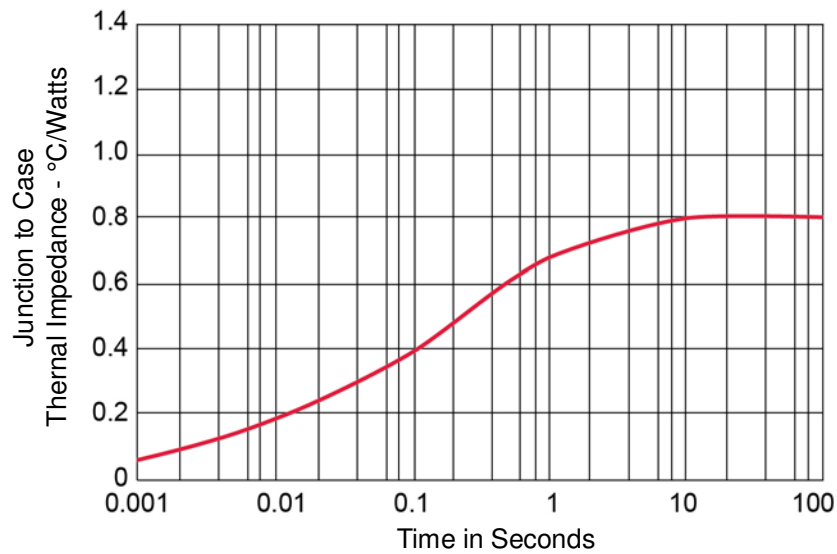
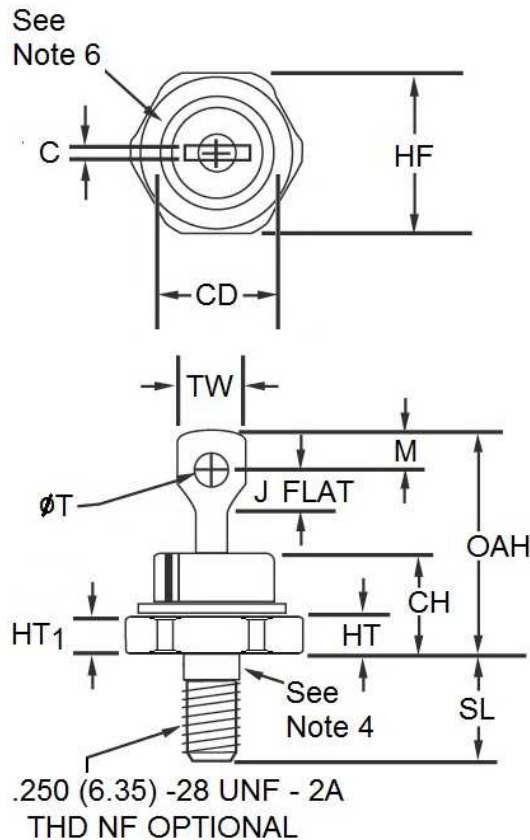


FIGURE 4
Transient Thermal Impedance

PACKAGE DIMENSIONS


Ltr	Dimensions			
	Inch		Millimeters	
	Min	Max	Min	Max
OAH	-	1.000	-	25.40
CH	-	0.450	-	11.43
HT	0.115	0.200	2.93	5.08
SL	0.422	0.453	10.72	11.50
HT1	0.060	-	1.53	-
B	0.250	0.375	6.35	9.52
CD	-	0.667	-	16.94
HF	0.667	0.687	16.95	17.44
J	0.156	-	3.97	-
ϕT	0.140	0.175	3.56	4.44
C	-	0.080	-	2.03
M	0.030	-	0.77	-

NOTES:

1. Dimensions are in inches.
2. Millimeters are given for general information only.
3. Units must not be damaged by torque of 30 inch-pounds applied to 0.250-28 UNF-28 nut assembled on thread.
4. Diameter of unthreaded portion 0.249 inch (6.32 mm) max and .220 inch (5.59 mm) min.
5. Complete threads to extend to within 2.5 threads of seating plane.
6. Angular orientation of this terminal is undefined.
7. Max pitch diameter of plated threads shall be basic pitch diameter 0.2268 inch (5.76 mm) reference FED-STD-H28.
8. A chamfer or undercut on one or both ends of the hex portion is optional; minimum base diameter at seating plane. 0.600 inch (15.24 mm).
9. In accordance with ASME Y14.5M, diameters are equivalent to Φx symbology.