



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



6 Lake Street, Lawrence, MA 01841
 1-800-446-1158 / (978) 620-2600 / Fax: (978) 689-0803
 Website: <http://www.microsemi.com>

SWITCHING DIODE

- METALLURGICALLY BONDED
- HERMETICALLY SEALED
- DOUBLE PLUG CONSTRUCTION

Qualified per MIL-PRF-19500/403

DEVICES

1N4500

QUALIFIED LEVELS

**JAN
JANTX**

MAXIMUM RATING AT 25°C

Operating Temperature:	-65°C to +175°C
Storage Temperature:	-65°C to +200°C
Surge Current A, sine 1S:	0.5A
Surge Current A, sine 1μS:	4A
Leakage Current: 100nA	75V, T _A = +25°C

DC ELECTRICAL CHARACTERISTICS

V _F				I _R				V _{BR}			
Ambient (°C)	I _F mA	Min V	Max V	Ambient (°C)	V _R V(dc)	Min μA	Max nA	Ambient (°C)	I _R μA	Min V	Max V
25	.250	0.47	0.56	25	75	--	100	25	100	80	--
25	1	0.52	0.60								
25	10	0.64	0.72								
25	20	0.67	0.77								
25	300	--	1.10								

NOTE: (1) Derate 2.0mA/dc/°C for T_A > =25°C


AC ELECTRICAL CHARACTERISTICS AT 25°C

	Min	Max	Unit
Capacitance @ 0V	--	4.0	pF
I _F = I _R = 10mA R _L = 100 ohms	--	6.0	ns



DO-35

PACKAGE DIMENSIONS

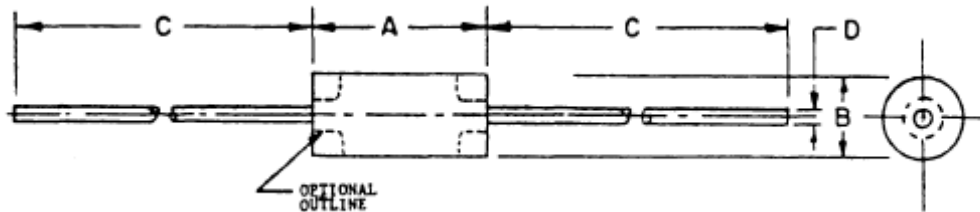

NOTES:

1. Metric equivalents (to the nearest .01mm) are give for general information only and are based upon 1 inch = 25.4mm.
2. Both leads shall be within the specified limits (see 3.3.1).
3. The maximum diameter of dimension B shall apply for dimension A.
4. The minimum diameter for dimension B shall apply over at least .075 (1.91mm) of dimension A.
5. The specified lead diameter applies in the zone between .050 (1.27mm) and 1.00 (25.4mm) from the diode body to the end of the lead. Outside of this zone the lead diameter shall not exceed diameter B.

Ltr	Dimensions				Note
	Inches		Millimeters		
	Min	Max	Min	Max	
A		.160		4.06	
B		.075		1.99	3, 4
C	1.000	1.500	25.40	38.10	2
D	.018	.022	.46	.56	5, 2

FIGURE 1: Physical dimensions diode: TYPE 1N4500

DESIGN DATA

Case: Hermetically sealed glass package per MIL-PRF-19500/403. DO-35 outline.

Lead Material: Copper clad steel

Lead Finish: Tin / Lead

Marking: 70°C/W maximum

Polarity: Cathode end is banded.