



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




# Zener Voltage Regulator Series

## 1N6321US thru 1N6349US



### Features

- JAN, JANTX, JANTXV and JANS available per MIL-PRF-19500/533
- Voidless hermetically sealed glass package
- Triple-layer passivation
- Internal "Category I" Metallurgical bonds for 1N6321US thru 1N6349US
- Also available in axial-leaded glass DO-35 style package.



### Description

This Zener Voltage Regulator series is military qualified to MIL-PRF-19500/533 and is ideal for high reliability applications where a failure cannot be tolerated. These industry-recognized 0.5 Watt Zener Voltage Regulators are hermetically sealed with voidless-glass construction using an internal metallurgical bond. It includes Zener selections from 7.5 to 110 volts in standard 5% tolerances as well as tighter tolerances identified by different suffix letters on the part number. They are also available in surface-mount packages. Aeroflex / Metelics also offers numerous other Zener products to meet higher and lower power ratings in both thru-hole and surface mount packages.

### Applications / Benefits

- DO-213AA, Hermetically sealed glass case. (MELF, SOD-80, LL34)
- Regulates voltage over a broad operating current and temperature range
- Extensive selection from 7.5 to 110 V
- Standard voltage tolerances are plus/minus 5% with no suffix
- Tight tolerances available in plus or minus 2% or 1% with C or D suffix respectively
- Extremely robust construction
- Flexible axial-lead mounting terminals
- Nonsensitive to ESD per MIL-STD-750 Method 1020

### Maximum Ratings

- Operating Temperature: -65°C to +175°C
- Storage Temperature: -65°C to +175°C
- Power Dissipation: 0.5 Watts @  $T_L = 75^\circ\text{C}$
- Thermal Resistance: 200°C/W junction to lead at 3/8 inch (10 mm) from body
- Thermal Impedance: 15°C/W at 10 ms
- Forward Voltage: 1.4 V at 1.0 A



### Electrical Characteristics


TYPE Note 1	V <sub>Z2</sub> Nominal +/-5% @ I <sub>Z2</sub>	V <sub>Z1</sub> Nominal +/-5% @ I <sub>Z1</sub>	Test Current I <sub>Z2</sub>	Dynamic Impedance Z <sub>Z</sub> @ I <sub>Z2</sub>	Dynamic Impedance Z <sub>Zk</sub> @ 250 mA	Maximum Current I <sub>ZM</sub>	Voltage Regulation V <sub>Z</sub> (reg) (ΔV <sub>Z</sub> ) Note 2	Surge Current @ 8.3 ms sq. wave I <sub>ZSM</sub>	Reverse Current V <sub>R</sub>	Maximum Reverse Current I <sub>R1</sub> @ V <sub>R</sub> 25 °C	Maximum Reverse Current I <sub>R2</sub> @ V <sub>R</sub> 150 °C	Maximum Noise Density ND @ 250 μA 1 to 3 kHz	Maximum Temperature Coefficient Zener Voltage α <sub>VZ</sub>	Maximum Capacitance @ 0 V
	Volts	Volts	mA	Ohms	Ohms	mA	Volts	Amps	Volts	μA	μA	mV / √Hz	%/°C	pF
1N6321US	7.5	6.6	20	4	400	57	0.4	1.16	5.0	2.0	10	5.0	+0.068	900
1N6322US	8.2	7.5	20	5	400	52	0.4	1.07	6.0	1.0	10	20	+0.075	800
1N6323US	9.1	8.4	20	6	500	47	0.5	0.97	7.0	1.0	10	40	+0.076	700
1N6324US	10	9.1	20	6	500	43	0.5	0.89	8.0	1.0	10	80	+0.079	600
1N6325US	11	10.0	20	7	550	39	0.5	0.83	8.5	1.0	10	100	+0.082	500
1N6326US	12	11.0	20	7	550	35	0.55	0.77	9.0	1.0	10	100	+0.083	450
1N6327US	13	11.9	9.5	8	550	33	0.55	0.71	9.9	0.05	10	100	+0.079	400
1N6328US	15	13.8	8.5	10	600	28	0.70	0.62	11	0.05	10	100	+0.082	350
1N6329US	16	14.7	7.8	12	600	27	0.75	0.58	12	0.05	10	100	+0.083	325
1N6330US	18	16.6	7.0	14	600	24	0.85	0.52	14	0.05	10	100	+0.085	300
1N6331US	20	18.5	6.2	18	500	21	0.95	0.47	15	0.05	10	100	+0.086	275
1N6332US	22	20.4	5.6	20	500	19	1.05	0.43	17	0.05	10	100	+0.087	260
1N6333US	24	22.3	5.2	24	500	18	1.15	0.39	18	0.05	10	100	+0.088	240
1N6334US	27	25.2	4.6	27	500	16	1.30	0.35	21	0.05	10	100	+0.090	220
1N6335US	30	28.0	4.2	32	500	14	1.45	0.31	23	0.05	10	100	+0.091	200
1N6336US	33	30.9	3.8	40	600	13	1.60	0.28	25	0.05	10	100	+0.092	185
1N6337US	36	33.7	3.4	50	600	12	1.75	0.26	27	0.05	10	100	+0.093	175
1N6338US	39	36.6	3.2	55	700	11	1.90	0.24	30	0.05	10	100	+0.094	170
1N6339US	43	40.4	3.0	65	800	9.9	2.10	0.22	33	0.05	10	80	+0.095	165
1N6340US	47	44.2	2.7	75	900	9.0	2.25	0.20	36	0.05	10	80	+0.095	155
1N6341US	51	48.0	2.5	85	1000	8.3	2.50	0.18	39	0.05	10	80	+0.096	145
1N6342US	56	52.7	2.2	100	1200	7.6	2.70	0.17	43	0.05	10	80	+0.007	135
1N6343US	62	58.4	2.0	125	1300	6.8	2.90	0.15	47	0.05	10	80	+0.097	130
1N6344US	68	64.1	2.8	155	1500	6.3	3.20	0.13	52	0.05	10	80	+0.098	120
1N6345US	75	70.8	1.7	180	1600	5.7	3.40	0.125	56	0.05	10	80	+0.098	110
1N6346US	82	77.4	1.5	220	1800	5.2	3.80	0.115	62	0.05	10	80	+0.099	105
1N6347US	91	86.0	1.4	270	2100	4.7	4.20	0.100	69	0.05	10	80	+0.099	100
1N6348US	100	94.5	1.3	340	2400	4.2	4.40	0.095	76	0.05	10	80	+0.110	85
1N6349US	110	104	1.1	500	2800	3.9	4.80	0.085	84	0.05	10	80	+0.110	90

NOTE 1: Tight tolerances available in plus or minus 2% or 1% with C or D suffix respectively, e.g. 1N6309C, 1N6335D, etc.

NOTE2: Voltage regulation V<sub>Z(reg)</sub> is the measured voltage change at thermal equilibrium between the current of 10% and 50% of Maximum Zener Current I<sub>ZM</sub> when the lead temperature is maintained at 25°C = +8°C, -2°C.



Outline Drawing

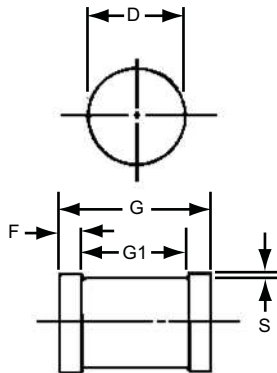

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
D	1.60	1.70	0.063	0.067
F	0.41	0.55	0.016	0.022
G	3.30	3.70	.130	.146
G1	2.54 REF.		.100 REF.	
S	0.03 MIN.		.001 MIN.	

LEADED DESIGN DATA

CASE: DO-213AA, Hermetically sealed glass case. (MELF, SOD-80, LL34)

LEAD FINISH: Tin / Lead

THERMAL RESISTANCE: ( $R_{\theta JEC}$ ): 100 °C/W maximum at L = 0 inch

THERMAL IMPEDANCE: ( $Z_{\theta JX}$ ): 25 °C/W maximum

POLARITY: Diode to be operated with the banded (cathode) end positive.

MOUNTING POSITION: Any.

Aeroflex / Metelics, Inc.

Hi-Rel Components

9 Hampshire Street,  
Lawrence, MA 01840  
Tel: (603) 641-3800  
Fax: (978) 683-3264

[www.aeroflex.com/metelics-hirelcomponents](http://www.aeroflex.com/metelics-hirelcomponents)

975 Stewart Drive,  
Sunnyvale, CA 94085  
Tel: (408) 737-8181  
Fax: (408) 733-7645

Sales: 888-641-SEMI (7364)

54 Grenier Field Road,  
Londonderry, NH 03053  
Tel: (603) 641-3800  
Fax: (603)-641-3500

[www.aeroflex.com/metelics](http://www.aeroflex.com/metelics)      [metelics-sales@aeroflex.com](mailto:metelics-sales@aeroflex.com)

Aeroflex / Metelics, Inc. reserves the right to make changes to any products and services herein at any time without notice. Consult Aeroflex or an authorized sales representative to verify that the information in this data sheet is current before using this product. Aeroflex does not assume any responsibility or liability arising out of the application or use of any product or service described herein, except as expressly agreed to in writing by Aeroflex; nor does the purchase, lease, or use of a product or service from Aeroflex convey a license under any patent rights, copyrights, trademark rights, or any other of the intellectual rights of Aeroflex or of third parties.

Copyright 2013 Aeroflex / Metelics. All rights reserved.

ISO 9001: 2008 certified companies



Our passion for performance is defined by three attributes represented by these three icons: solution-minded, performance-driven and customer-focused.