



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





# NPN Medium Power Silicon Transistor


2N3418, 2N3419, 2N3420 & 2N3421

2N3418S, 2N3419S, 2N3420S & 2N3421S



## Features

- Available in JAN, JANTX and JANTXV per MIL-PRF-19500/393
- TO-5, TO-39 (TO-205AD) Package



## Maximum Ratings

Ratings	Symbol	2N3418, S 2N3420, S	2N3419, S 2N3421, S	Units
Collector - Emitter Voltage	$V_{CEO}$	60	80	Vdc
Collector - Base Voltage	$V_{CBO}$	85	125	Vdc
Emitter - Base Voltage	$V_{EBO}$	8.0		Vdc
Collector Current $T_p \leq 1.0$ ms, duty cycle $\leq 50\%$	$I_C$	3.0 5.0		Adc
Total Power Dissipation @ $T_A = +25$ °C @ $T_C = +100$ °C	$P_T$	1.0 10.0		W W
Operating & Storage Temperature Range	$T_{op}, T_{stg}$	-65 to +200		°C

## Electrical Characteristics

OFF Characteristics	Symbol	Minimum	Maximum	Units
Collector - Emitter Breakdown Voltage $I_C = 50$ mAdc 2N3418, S, 2N3420, S 2N3419, S, 2N3421, S	$V_{(BR)CEO}$	60 80	---	Vdc
Collector - Emitter Cutoff Current $V_{CE} = 80$ Vdc, $V_{BE} = -0.5$ Vdc $V_{CE} = 120$ Vdc, $V_{BE} = -0.5$ Vdc 2N3418, S, 2N3420, S 2N3419, S, 2N3421, S	$I_{CEX}$	---	0.3 0.3	$\mu$ Adc
Collector - Emitter Cutoff Current $V_{CE} = 45$ Vdc $V_{CE} = 60$ Vdc 2N3418, S, 2N3420, S 2N3419, S, 2N3421, S	$I_{CEO}$	---	5.0 5.0	$\mu$ Adc
Emitter - Base Cutoff Current $V_{EB} = 6.0$ Vdc, $I_C = 0$ $V_{EB} = 8.0$ Vdc, $I_C = 0$	$I_{EBO}$	---	0.5 10.0	$\mu$ Adc




## Electrical Characteristics -con't

ON Characteristics (1)		Symbol	Minimum	Maximum	Unit
Forward Current Transfer Ratio					
$I_C = 100 \text{ mAdc}, V_{CE} = 2.0 \text{ Vdc}$	2N3418, S, 2N3419, S	$H_{FE}$	20	60	
	2N3420, S, 2N3421, S		40		
$I_C = 1.0 \text{ Adc}, V_{CE} = 2.0 \text{ Vdc}$	2N3418, S, 2N3419, S		20	120	
	2N3420, S, 2N3421, S		40		
$I_C = 2.0 \text{ Adc}, V_{CE} = 2.0 \text{ Vdc}$	2N3418, S, 2N3419, S	15	30		
	2N3420, S, 2N3421, S	30			
$I_C = 5.0 \text{ Adc}, V_{CE} = 5.0 \text{ Vdc}$	2N3418, S, 2N3419, S	10	15		
	2N3420, S, 2N3421, S	15			
Base - Emitter Voltage		$V_{BE(sat)}$			Vdc
$I_C = 1.0 \text{ Adc}, I_B = 0.1 \text{ Adc}$			0.6	1.2	
$I_C = 52.0 \text{ Adc}, I_B = 0.2 \text{ Adc}$			0.7	1.4	
Collector - Emitter Saturation Voltage		$V_{CE(on)}$			Vdc
$I_C = 250 \text{ mAdc}, I_B = 25 \text{ mAdc}$			---	0.25	
$I_C = 500 \text{ mAdc}, I_B = 50 \text{ mAdc}$			---	0.5	
<b>DYNAMIC Characteristics</b>					
Magnitude of Common Emitter Small-Signal Short-Circuit Forward Current Transfer Ratio					
$I_C = 0.1 \text{ Adc}, V_{CE} = 10.0 \text{ Vdc}, f = 20 \text{ MHz}$		$ h_{fe} $	1.3	8.0	
Output Capacitance					pF
$V_{CB} = 10 \text{ Vdc}, I_E = 0, 100 \text{ kHz} \leq f \leq 1.0 \text{ MHz}$		$C_{obo}$	---	150	
<b>Switching Characteristics</b>					
Delay Time	$V_{BE(off)} = -3.7 \text{ Vdc}$	$t_d$	---	0.08	$\mu\text{s}$
Rise Time	$I_C = 1.0 \text{ Adc}, I_{B2} = 100 \text{ mAdc}$	$t_r$	---	0.22	$\mu\text{s}$
Storage Time	$V_{BE(off)} = -3.7 \text{ Vdc}$	$t_s$	---	1.10	$\mu\text{s}$
Fall Time	$I_C = 1.0 \text{ Adc}, I_{B2} = -100 \text{ mAdc}$	$t_f$	---	0.20	$\mu\text{s}$
<b>SAFE OPERATING AREA</b>					
<b>DC Tests:</b>	$T_C = 100 \text{ }^\circ\text{C}, 1 \text{ Cycle}, t = 1.0 \text{ s s}$				
<b>Test 1:</b>	$V_{CE} = 5.0 \text{ Vdc}, I_C = 3.0 \text{ Adc}$				
<b>Test 2:</b>	$V_{CE} = 37 \text{ Vdc}, I_C = 0.4 \text{ Adc}$				
<b>Test 3:</b>	$V_{CE} = 60 \text{ Vdc}, I_C = 0.185 \text{ mAdc}$	2N3418, S;	2N3420, S		
	$V_{CE} = 80 \text{ Vdc}, I_C = 0.12 \text{ mAdc}$	2N3419, S;	2N3421, S		



Outline Drawing

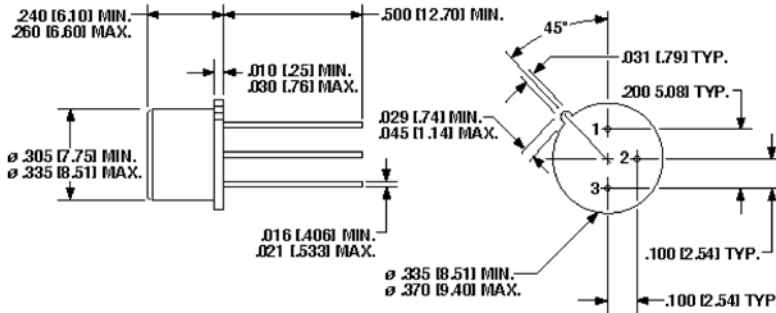

NOTE: Dimensions in Inches [mm]

**Aeroflex / Metelics, Inc.**

975 Stewart Drive,  
Sunnyvale, CA 94085  
Tel: (408) 737-8181  
Fax: (408) 733-7645

Sales: 888-641-SEMI (7364)

**Hi-Rel Components**

9 Hampshire Street,  
Lawrence, MA 01840  
Tel: (603) 641-3800  
Fax: (978) 683-3264

[www.aeroflex.com/metelicsHRC](http://www.aeroflex.com/metelicsHRC)

54 Grenier Field Road,  
Londonderry, NH 03053  
Tel: (603) 641-3800  
Fax: (603)-641-3500

**ISO 9001: 2008 certified companies**

[www.aeroflex.com/metelics](http://www.aeroflex.com/metelics)      [metelics-sales@aeroflex.com](mailto:metelics-sales@aeroflex.com)

Aeroflex / Metelics, Inc. reserves the right to make changes to any products and services herein at any time without notice. Consult Aeroflex or an authorized sales representative to verify that the information in this data sheet is current before using this product. Aeroflex does not assume any responsibility or liability arising out of the application or use of any product or service described herein, except as expressly agreed to in writing by Aeroflex; nor does the purchase, lease, or use of a product or service from Aeroflex convey a license under any patent rights, copyrights, trademark rights, or any other of the intellectual rights of Aeroflex or of third parties.

Copyright 2013 Aeroflex / Metelics. All rights reserved.



Our passion for performance is defined by three attributes represented by these three icons: solution-minded, performance-driven and customer-focused.