



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





# NPN High Power Silicon Transistors

## 2N3902 & 2N5157

### Features

- Available in JAN, JANTX, and JANTXV per MIL-PRF-19500/371
- TO-3 (TO-204AA) Package



### Maximum Ratings

Ratings	Symbol	2N3902	2N5157	Units
Collector - Emitter Voltage	$V_{CEO}$	400	500	Vdc
Emitter - Base Voltage	$V_{EBO}$	5.0	6.0	Vdc
Collector - Base Voltage	$V_{CBO}$	7.0		Vdc
Base Current	$I_B$	2.0		Adc
Collector Current	$I_C$	3.5		Adc
Total Power Dissipation @ $T_A = +25\text{ }^\circ\text{C}$ (1) @ $T_A = +25\text{ }^\circ\text{C}$ (2)	$P_T$	5.0		W
		100		W
Operating & Storage Temperature Range	$T_j, T_{stg}$	-65 to +200		$^\circ\text{C}$

### Thermal Characteristics

Characteristics	Symbol	Maximum	Units
Thermal Resistance, Junction-to-Case	$R_{\theta JC}$	1.25	$^\circ\text{C}/\text{W}$

- 1) Derate linearly @ 28.57 mW/ $^\circ\text{C}$  for  $T_A > +25\text{ }^\circ\text{C}$
- 2) Derate linearly @ 0.8 mW/ $^\circ\text{C}$  for  $T_C > +75\text{ }^\circ\text{C}$

### Electrical Characteristics

OFF Characteristics	Symbol	Minimum	Maximum	Units
Collector - Emitter Cutoff Current $V_{CE} = 325\text{ Vdc}$ 2N3902 $V_{CE} = 400\text{ Vdc}$ 2N5157	$I_{CEO}$	---	250 250	$\mu\text{Adc}$
Collector - Emitter Cutoff Current $V_{BE} = 1.5\text{ Vdc}, V_{CE} = 700\text{ Vdc}$	$I_{CEX}$	---	500	$\mu\text{Adc}$
Collector - Emitter Cutoff Current $V_{EB} = 5.0\text{ Vdc}$ 2N3902 $V_{EB} = 6.0\text{ Vdc}$ 2N5157	$I_{EBO}$	---	200 200	$\mu\text{Adc}$
<b>OFF Characteristics</b>				
Base - Emitter Saturation Voltage $I_C = 1.0\text{ Adc}, I_B = 0.1\text{ Vdc}$ $I_C = 3.5\text{ Adc}, I_B = 0.7\text{ Vdc}$	$V_{BE(sat)}$	---	1.5 2.0	Vdc
Collector - Emitter Saturation Voltage $I_C = 1.0\text{ Adc}, I_B = 0.1\text{ Adc}$ $I_C = 3.5\text{ Adc}, I_B = 0.7\text{ Adc}$	$V_{CE(sat)}$	---	0.8 2.5	Vdc




**Electrical Characteristics -con't**

<b>ON Characteristics (2) (con't)</b>		Symbol	Minimum	Maximum	Unit
Forward Current Transfer Ratio $I_C = 0.5 \text{ Adc}, V_{CE} = 5.0 \text{ Vdc}$ $I_C = 1.0 \text{ Adc}, V_{CE} = 5.0 \text{ Vdc}$ $I_C = 2.5 \text{ Adc}, V_{CE} = 5.0 \text{ Vdc}$ $I_C = 3.5 \text{ Adc}, V_{CE} = 5.0 \text{ Vdc}$		$H_{FE}$	25 30 10 5	90	
Collector - Emitter Sustaining Voltage $I_C = 100 \text{ mAdc}$	2N3902 2N5157	$V_{CE(sat)}$	--- ---	1.0 2.5	Vdc
<b>DYNAMIC Characteristic</b>					
Small-Signal Short-Circuit Forward Current Transfer Ratio $I_C = 0.2 \text{ Adc}, V_{CE} = 10 \text{ Vdc}, f = 1 \text{ MHz}$		$ h_{fe} $	2.5	25	
Output Capacitance $V_{CB} = 10 \text{ Vdc}, I_E = 0, 100 \text{ kHz} \leq f \leq 1.0 \text{ MHz}$		$C_{obo}$	---	500	pF
<b>Switching Characteristic</b>					
Turn-On Time $V_{CC} = 125 \text{ Vdc}, I_C = 1.0 \text{ Adc}, I_{B1} = 0.1 \text{ Adc}$		$t_{on}$	---	0.8	$\mu\text{s}$
Turn-Off Time $V_{CC} = 125 \text{ Vdc}, I_C = 1.0 \text{ Adc}, I_{B1} = 0.1 \text{ Adc}, -I_{B2} = 0.50 \text{ Adc}$		$t_{off}$	---	1.7	$\mu\text{s}$
<b>SAFE OPERATING AREA</b>					
<b>DC Tests:</b> $T_C = +25^\circ\text{C}, 1 \text{ Cycle}, t = 1.0 \text{ s}$ (See Figure 3 of MIL-PRF-19500/371)					
<b>Test 1:</b> $V_{CE} = 28.6 \text{ Vdc}, I_C = 3.5 \text{ Adc}$					
<b>Test 2:</b> $V_{CE} = 70 \text{ Vdc}, I_C = 1.43 \text{ Adc}$					
<b>TEST 3:</b> $V_{CE} = 325 \text{ Vdc}, I_C = 55 \text{ mAdc}$ 2N3902					
$V_{CE} = 400 \text{ Vdc}, I_C = 35 \text{ mAdc}$ 2N5157					
<b>Switching Test:</b>					
<b>Load condition C (unclamped inductive load)</b>					
$T_C = 25^\circ\text{C}, \text{duty cycle} \leq 10\%; R_S = 0.1 \Omega$ (See Figure 4 of MIL-PRF-19500/371)					
<b>Test 1:</b> $t_p = \text{approximately } 3 \text{ ms (vary to obtain } I_C), R_{BB1} = 20 \Omega, V_{BB1} = 10 \text{ Vdc}; R_{BB2} = 3 \text{ k}\Omega,$ $V_{BB2} = 1.5 \text{ Vdc}, V_{CC} = 50 \text{ Vdc}, I_C = 3.5 \text{ Adc}, L = 60 \text{ mH}, R = 3 \Omega; R_L \leq 14 \Omega$					
<b>Test 2:</b> $t_p = \text{approximately } 3 \text{ ms (vary to obtain } I_C), R_{BB1} = 100 \Omega, V_{BB1} = 10 \text{ Vdc}; R_{BB2} = 3 \text{ k}\Omega,$ $V_{BB2} = 1.5 \text{ Vdc}, I_C = 0.6 \text{ Adc}, V_{CC} = 50 \text{ Vdc}, L = 200 \text{ mH}, R = 8 \Omega; R_L \leq 83 \Omega$					
<b>Switching Tests:</b>					
<b>Load condition (clamped inductive load)</b>					
$T_C = 25^\circ\text{C}, \text{duty cycle} \leq 10\%$ (See Figure 5 of MIL-PRF-19500/371)					
<b>Test 1:</b> $t_p = \text{approximately } 30 \text{ ms (vary to obtain } I_C), R_S = 0.1 \Omega, R_{BB1} = 20 \Omega, V_{BB1} = 10 \text{ Vdc};$ $R_{BB2} = 100 \Omega, V_{BB2} = 1.5 \text{ Vdc}, V_{CC} = 50 \text{ Vdc}, I_C = 3.5 \text{ Adc}, L = 60 \text{ mH}, R = 3 \Omega; R_L \leq 0 \Omega$ (A suitable clamping circuit or diode can be used.) Clamp Voltage = 400 +0, -5 Vdc 2N3902 Clamp Voltage = 500 +0, -5 Vdc 2N5157 (Clamped voltage must be reached)					

 (2) Pulse Test: Pulse Width = 300  $\mu\text{s}$ , Duty Cycle  $\leq 2.0\%$ .

Outline Drawing

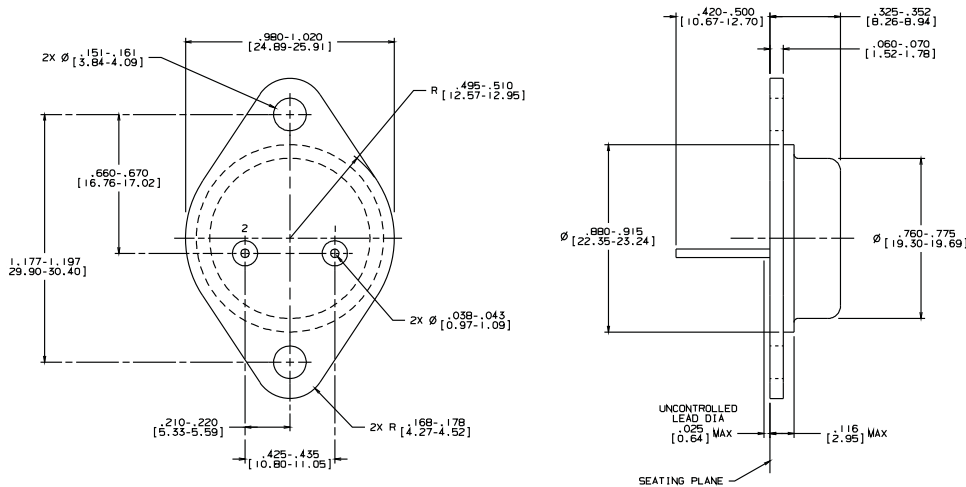

- NOTES:  
 1. STANDARD HEADER TYPE SOLID BASE.  
 2. STANDARD LEAD FINISH PER MIL-M-58510 TYPE X OR EQUIVALENT.  
 3. LEAD NOT BENT GREATER THAN 15°.  
 4. DIMENSIONS BASED ON JEDEC STANDARD TO-3 PUBLICATION 95, PA

**Aeroflex / Metelics, Inc.**

975 Stewart Drive,  
 Sunnyvale, CA 94085  
 Tel: (408) 737-8181  
 Fax: (408) 733-7645

Sales: 888-641-SEMI (7364)

**Hi-Rel Components**

9 Hampshire Street,  
 Lawrence, MA 01840  
 Tel: (603) 641-3800  
 Fax: (978) 683-3264

[www.aeroflex.com/metelics-hirelcomponents](http://www.aeroflex.com/metelics-hirelcomponents)

54 Grenier Field Road,  
 Londonderry, NH 03053  
 Tel: (603) 641-3800  
 Fax: (603)-641-3500

**ISO 9001: 2008 certified companies**

[www.aeroflex.com/metelics](http://www.aeroflex.com/metelics)      [metelics-sales@aeroflex.com](mailto:metelics-sales@aeroflex.com)

Aeroflex / Metelics, Inc. reserves the right to make changes to any products and services herein at any time without notice. Consult Aeroflex or an authorized sales representative to verify that the information in this data sheet is current before using this product. Aeroflex does not assume any responsibility or liability arising out of the application or use of any product or service described herein, except as expressly agreed to in writing by Aeroflex; nor does the purchase, lease, or use of a product or service from Aeroflex convey a license under any patent rights, copyrights, trademark rights, or any other of the intellectual rights of Aeroflex or of third parties.

Copyright 2012 Aeroflex / Metelics. All rights reserved.



Our passion for performance is defined by three attributes represented by these three icons: solution-minded, performance-driven and customer-focused.