



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us





Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



版 数 REV.	年月日 DATE	DCN NO.	変 更 内 容 DESCRIPTION	製 図 DR.	担 当 CHK.	査 閲 APPD.	承 認 APPD.
2	26.Jan.2007	062114	REVISED FORM etc.	————	N.SASANO	E.MATSUMOTO	A.ONOGAWA
3	14.May.2007	062960	REVISED TITLE	————	T.TAKESHITA	E.Matsumoto	A.Onogawa

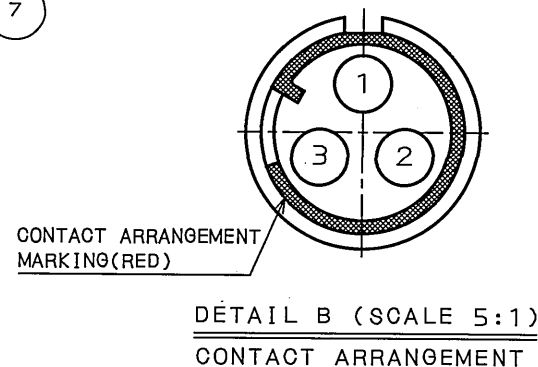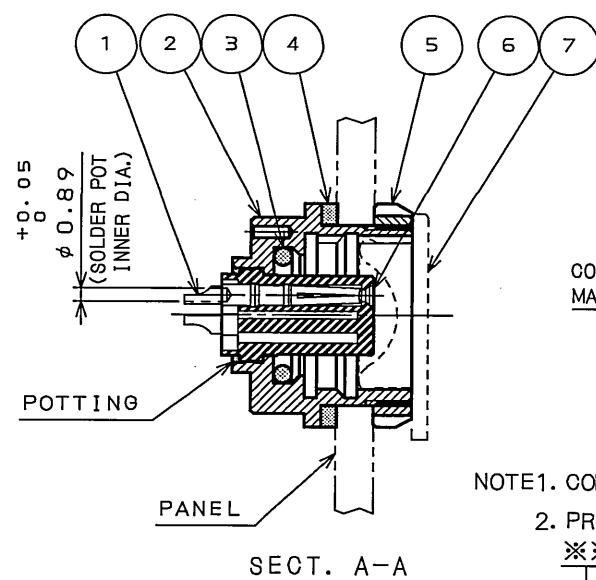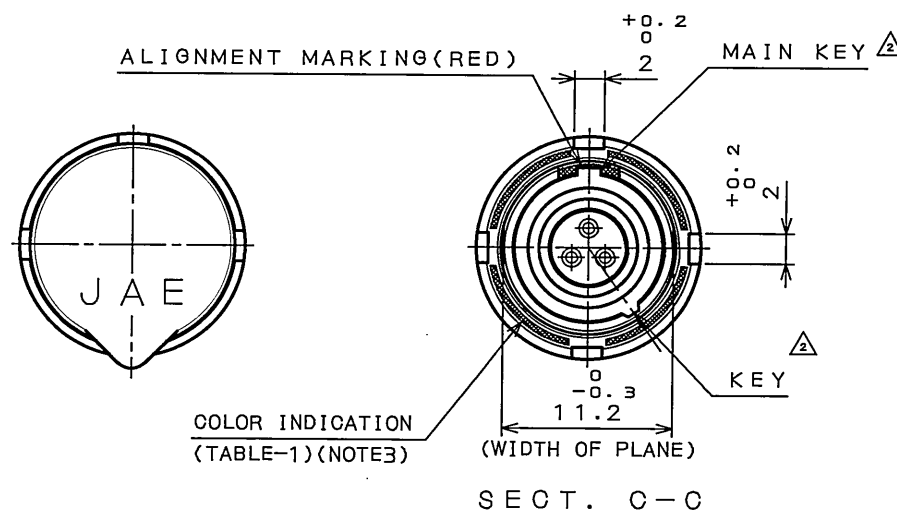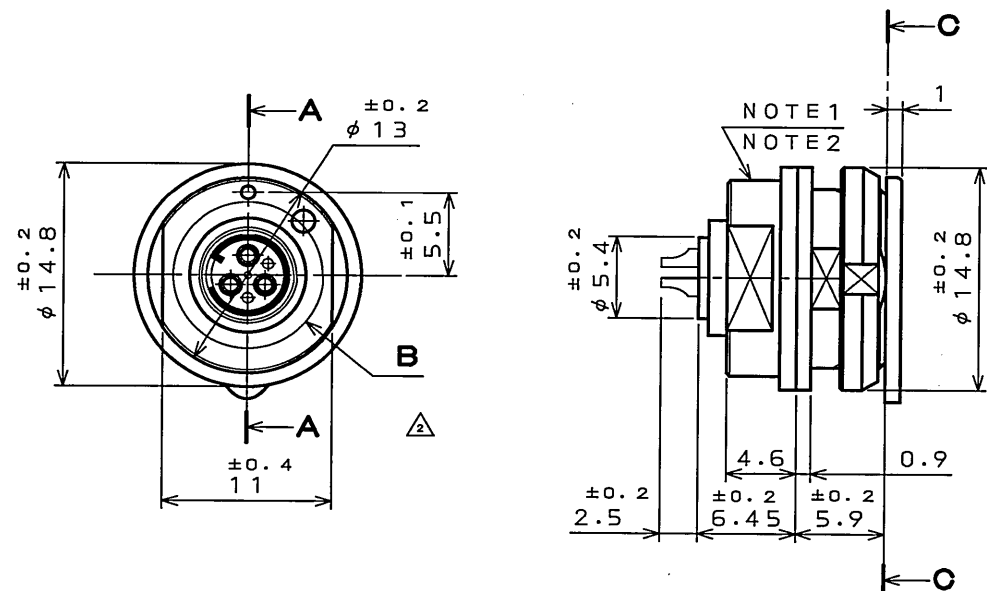

No.	ASSEMBLY NUT COLOR INDICATION
0	NONE
1	BLACK
2	BLUE
3	RED
4	YELLOW

<u>SPECIFICATION</u>	
NUMBER OF CONTACT	: 3 Δ
RATED VOLTAGE	: 320VAC
RATED CURRENT	: 3A MAX per CONTACT
DIELECTRIC WITHSTANDING VOLTAGE	: 1500VAC (INITIAL)
INSURATION RESISTANCE	: 1000M Ω MIN (AT 500VDC, INITIAL)
APPLICABLE WIRE	: AWG#22 MAX
WATERPROOF	: IP68 (MATED AND UNMATED)

仕様	
芯数	: 3芯 
定格電圧	: 320VAC
定格電流	: 3A以下/1芯
耐電圧	: 1500VAC (初期値)
絶縁抵抗	: 1000MΩ以上 (500VDCにて、初期値)
適用電線	: AWG #22以下
防水性能	: IP68 (単体及び嵌合時)

NOTE1. COMPANY LOGO "JAE" APPEARS IN THE AREA SHOWN.

2. PRODUCTION LOT NUMBER ARE MARKED AS INDICATED.

※※※

MANUFACTURER MONTH(1 ~ 9 , X , Y , Z)
(JAN.~SEP.,OCT.,NOV.,DEC.)

MANUFACTURER YEAR('05,'06,'07, . . .)

3. TABLE-1 INDICATES THE COLOR OF THE ASSEMBLY NUT.
No. "0" INDICATES NO COLOR INDICATION. THE STANDARD
TYPE WOULD BE No. "0" (NO COLOR CODE).

4. RECOMMENDED TORQUE FOR ASSEMBLY NUT: 0.6~0.8Nm.
PLEASE APPLY "LOCTITE" OR SIMILAR MATERIAL TO
PREVENT THREAD LOOSENING.

注1. 図示の位置に社名を表示する。【JAE】

2. 図示の位置に製造ロットNo.を表示する.

✕ ✕ ✕

製造月(1~9月,X:10月,Y:11月,Z:12月)

製造年('05,'06,'07,...)

3. TABLE-1はアセンブリナットのカラー表示を示す。No. “0”はカラー表示が無いことを示す。尚、標準品はNo. “0”（カラー表示無し）となる。

4. アッセンブリナット締付け推奨トルク: 0.6~0.8Nm.
尚、緩み止めとして "LOCTITE" 又は相当品をご使用下さい。

7	DUST CAP	1	SYNTHETIC RUBBER	_____	
6	INSULATOR	1	SYNTHETIC RESIN	_____	
5	ASSEMBLY NUT	1	COPPER ALLOY	CHROMIUM PLATING	(NOTE3,4)
4	GASKET	1	SYNTHETIC RUBBER	_____	
3	"O "RING	1	SYNTHETIC RUBBER	_____	
2	SHELL	1	COPPER ALLOY	CHROMIUM PLATING	
1	SOCKET CONTACT	3	COPPER ALLOY	GOLD PLATING OVER NICKEL	Au : 0.76μm MIN
符 号 NO.	名 称 DESCRIPTION	個 数 QTY.	材 料 MATERIAL	仕 上 FINISH	備 考 REMARKS

仕様書 (SPECIFICATION)		第1版 (ORIGINAL DATE)		JAE 航空電子工業株式会社 (JAE AVIATION ELECTRONICS INDUSTRY CO., LTD.)		REMARKS	
JACS-50001-1 JABL-50001-1		7.Jun.2005		JAE AVIATION ELECTRONICS INDUSTRY CO., LTD.		日本航空電子工業株式会社	
公差 (GENERAL TOLERANCE)		担当 CHK. T.OKAMURA		JB5CS03FL※ON		JAPAN AVIATION ELECTRONICS INDUSTRY, LTD.	
寸法 (DIMENSION)		承認 APPD. M.MAJIME		JAM NUT RECEPTACLE (SOLDER TYPE)		図面番号 (DRAWING NO.)	
角度 (ANGLES)				質量 (MASS)		SJ104322	
. ± 0.8		X° ±		.X ± 0.4		.XX ± 0.1	
.X ± 0.4		X°X' ±		.XX ± 0.1		.XXX ±	
.XX ± 0.1							
.XXX ±							