



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



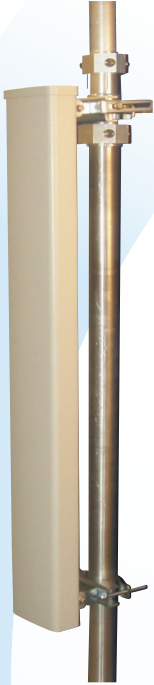

2.5 GHz HIGH-PERFORMANCE 90° BEAMWIDTH DUAL 45° SLANT SECTOR

The Laird Technologies SKS230090-16N-001 wideband, dual slant sector antenna, covers frequencies from 2.3 to 2.7 GHz. Significantly reduced upper side lobes and null fill below the horizon are achieved thanks to our highly skilled engineering staff and the utilization of our proprietary Artificial Intelligence RF Optimizing development tool. Laird Technologies' suite of high-performance sector antennas features proprietary design elements and low-loss feed network, resulting in extremely high levels of system performance and ruggedness while maintaining very slim profiles with low wind and ice loading.





FEATURES

- Suppression of the first two upper side lobes
- 1st null fill below the horizon
- Low-loss feed stripline feed network and efficient dipole radiators provide high efficiency and gain
- Excellent matching of the radiating elements and feed network allows for superior pattern control in elevation
- Optimized for maximum ratio combining
- Two Type N-f connectors at the bottom for easy installation

MARKETS

- High multi-path environment
- Large carrier class deployment
- WiMAX service provider
- Ideal base station antenna for high density wireless network coverage in mobile and fixed applications

ANTENNA PATTERNS

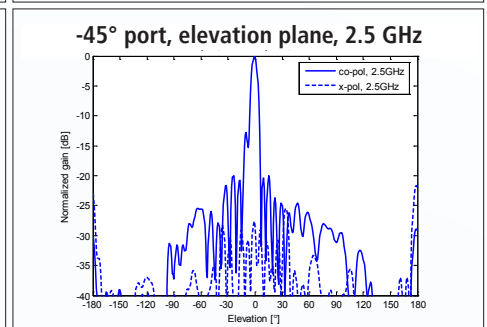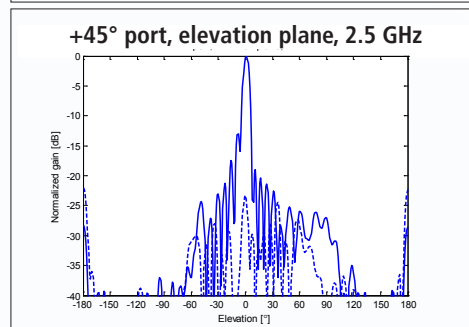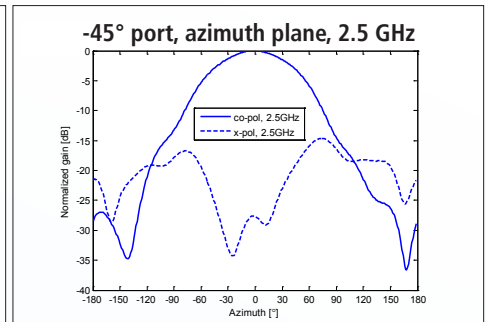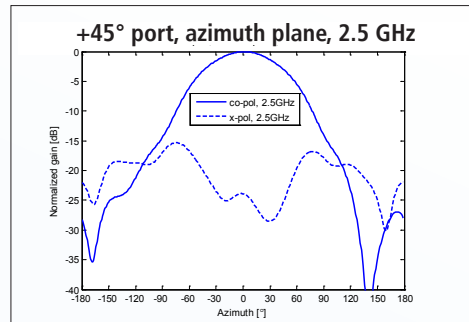

global solutions: local support™

Americas: +1.847.839.6907
IAS-AmericasEastSales@lairdtech.com


Europe: +1.32.80.7866.12
IAS-EUSales@lairdtech.com

Asia: +1.65.6.243.8022
IAS-AsiaSales@lairdtech.com

www.lairdtech.com

SPECIFICATIONS

PARAMETER	SPECIFICATIONS
Antenna part number	SKS230090-16N-001
Frequency range	2.3-2.7 GHz
Gain @ 2.5 GHz	16.5 dBi
Maximum VSWR	1.5:1
3 dB beamwidth- Azimuth	90°
3 dB beamwidth- Elevation	5.5°-6.5°
Elevation null fill	1st null > -20 dB
Upper sidelobe level reduction (1st and 2nd)	< -16 dB
Polarization	+45° and -45°
Cross-polarization level in zero azimuth	< -20 dB
Cross-polarization ratio within ±60° azimuth	> 10 dB
Port-to-port isolation	> 25 dB
Front-to-back ratio (co-polar)	> 25 dB
Maximum input power	20 W average, 480 W peak
Input impedance	50 ohm
Mechanical size	1140 mm x 165 mm x 75 mm
Antenna weight	3.9 kg (8.5 lbs); 6.3 kg (13.0 lbs) with bracket
Wind survival rating	Operational 100 mph / Survival 136 mph
Antenna connection	Type N female at the bottom
Radome	Light grey UV resistant plastic
Mount style	Mast mount
Mounting hardware	Tilt mount kit 1.5 in to 4.5 in dia.
Temperature	-40°C to +65°C
Lightning protection	DC-grounded



Mounting Kit:
JBXRK-01-TM5

ANT-DS-SKS230090-16N-001 0511

Any information furnished by Laird Technologies, Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird Technologies materials rests with the end user, since Laird Technologies and its agents cannot be aware of all potential uses. Laird Technologies makes no warranties as to the fitness, merchantability or suitability of any Laird Technologies materials or products for any specific or general uses. Laird Technologies shall not be liable for incidental or consequential damages of any kind. All Laird Technologies products are sold pursuant to the Laird Technologies' Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2010 Laird Technologies, Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Technologies Logo, and other marks are trade marks or registered trade marks of Laird Technologies, Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird Technologies or any third party intellectual property rights.