



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



4-6 Watts

JCD Series



- 2:1 Input Range
- Industry Standard Package
- 1600 VDC Isolation
- Continuous Short Circuit Protection
- -40 °C to +100 °C Operating Temperature
- Single & Dual Outputs
- 3 Year Warranty

Specification

Input

Input Voltage Range	<ul style="list-style-type: none"> • 5 V (4.5-9 VDC) • 12 V (9-18 VDC) • 24 V (18-36 VDC) • 48 V (36-72 VDC)
Input Current	<ul style="list-style-type: none"> • See table
Input Reflected Ripple Current	<ul style="list-style-type: none"> • 35 mA rms through 12 μH inductor
Input Filter	<ul style="list-style-type: none"> • Pi network
Input Surge	<ul style="list-style-type: none"> • 5 V models 15 VDC for 100 ms • 12 V models 24 VDC for 100 ms • 24 V models 40 VDC for 100 ms • 48 V models 80 VDC for 100 ms

Output

Output Voltage	<ul style="list-style-type: none"> • See table
Setpoint Accuracy	<ul style="list-style-type: none"> • $\pm 1\%$ ($\pm 2\%$ for JCD0412/24/48S3V3 & D03 models)
Voltage Balance	<ul style="list-style-type: none"> • $\pm 1\%$ ($\pm 2\%$ D03 models)
Minimum Load	<ul style="list-style-type: none"> • No minimum load required
Line Regulation	<ul style="list-style-type: none"> • $\pm 0.5\%$
Load Regulation	<ul style="list-style-type: none"> • $\pm 0.5\%$ single outputs, $\pm 1.5\%$ for S3V3 & D03 models
Cross Regulation	<ul style="list-style-type: none"> • $\pm 5\%$ (see note 1)
Ripple & Noise	<ul style="list-style-type: none"> • 60 mV pk-pk, 20 MHz bandwidth. See note 2
Start Up Delay	<ul style="list-style-type: none"> • 20 ms typical for 5 V input models, 500 ms typical for 12/24/48 V input models
Transient Response	<ul style="list-style-type: none"> • 3% max deviation, recovery to within 1% in 250 μs (5% & 300 μs for JCD0412/24/48S3V3 & D03 models) for a 25% load change
Temperature Coefficient	<ul style="list-style-type: none"> • 0.02%/°C
Overload Protection	<ul style="list-style-type: none"> • 150% of full load on 5 V input models only
Short Circuit Protection	<ul style="list-style-type: none"> • Indefinite with auto recovery
Maximum Capacitive Load	<ul style="list-style-type: none"> • See table

General

Efficiency	<ul style="list-style-type: none"> • See table
Isolation Voltage	<ul style="list-style-type: none"> • 1600 VDC Input to Output • For optional high isolation versions 3500 VDC Input to Output add suffix -H to model number • 1600 VDC Input to Case • 1600 VDC Output to Case
Isolation Capacitance	<ul style="list-style-type: none"> • 500 pF typical input to output
Isolation Resistance	<ul style="list-style-type: none"> • $10^9 \Omega$
Switching Frequency	<ul style="list-style-type: none"> • 266 kHz typical
Power Density	<ul style="list-style-type: none"> • 4 W: 10 W/in³, 5 W: 12.5 W/in³, 6 W: 15 W/in³
MTBF	<ul style="list-style-type: none"> • >1.1 Mhrs to MIL-STD-217F at 25 °C, GB

Environmental

Operating Temperature	<ul style="list-style-type: none"> • -40 °C to +100 °C (see derating curve)
Case Temperature	<ul style="list-style-type: none"> • +100 °C max
Storage Temperature	<ul style="list-style-type: none"> • -40 °C to +125 °C
Cooling	<ul style="list-style-type: none"> • Convection-cooled
Operating Humidity	<ul style="list-style-type: none"> • Up to 95% RH, non-condensing

EMC

Emissions	<ul style="list-style-type: none"> • EN55022 Class A conducted with external components, see application note
ESD Immunity	<ul style="list-style-type: none"> • EN61000-4-2, level 3, Perf Criteria B
Radiated Immunity	<ul style="list-style-type: none"> • EN61000-4-3, 10 V/m, Perf Criteria A
EFT/Burst	<ul style="list-style-type: none"> • EN61000-4-4, level 3 Perf Criteria B*
Surge	<ul style="list-style-type: none"> • EN61000-4-5, level 2, Perf Criteria A*
Conducted Immunity	<ul style="list-style-type: none"> • EN61000-4-6, 10 Vrms, Perf Criteria B*
Magnetic Field	<ul style="list-style-type: none"> • EN61000-4-8, 1 A/m, Perf Criteria B*

*External input capacitor required, 220 μ F/100 V


Models and Ratings

Input Voltage	Output Voltage	Output Current	Input Current ⁽¹⁾		Maximum Capacitive Load	Efficiency	Model Number
			No Load	Full Load			
4.5-9 VDC	3.3 V	1200 mA	25 mA	1084 mA	3300 µF	73%	JCD0405S3V3
	5.0 V	800 mA	25 mA	1026 mA	1000 µF	78%	JCD0405S05
	12.0 V	333 mA	30 mA	974 mA	220 µF	82%	JCD0405S12
	15.0 V	266 mA	30 mA	973 mA	100 µF	82%	JCD0405S15
	±3.3 V	±600 mA	25 mA	1042 mA	±680 µF	76%	JCD0405D03
	±5.0 V	±400 mA	30 mA	1012 mA	±470 µF	79%	JCD0405D05
	±12.0 V	±166 mA	35 mA	963 mA	±100 µF	83%	JCD0405D12
	±15.0 V	±133 mA	40 mA	985 mA	±47 µF	81%	JCD0405D15
9-18 VDC	3.3 V	1200 mA	30 mA	445 mA	680 µF	74%	JCD0412S3V3
	5.0 V	800 mA	30 mA	427 mA	1000 µF	78%	JCD0412S05
	9.0 V	444 mA	30 mA	416 mA	470 µF	80%	JCD0412S09
	12.0 V	333 mA	30 mA	406 mA	100 µF	82%	JCD0412S12
	15.0 V	266 mA	30 mA	401 mA	100 µF	83%	JCD0412S15
	24.0 V	166 mA	30 mA	406 mA	22 µF	82%	JCD0412S24
	±3.3 V	±600 mA	30 mA	438 mA	±680 µF	76%	JCD0412D03
	±5.0 V	±400 mA	30 mA	427 mA	±470 µF	78%	JCD0412D05
	±9.0 V	±220 mA	30 mA	416 mA	±220 µF	80%	JCD0412D09
	±12.0 V	±166 mA	30 mA	427 mA	±47 µF	78%	JCD0412D12
	±15.0 V	±133 mA	30 mA	416 mA	±150 µF	80%	JCD0412D15
	±24.0 V	±83 mA	30 mA	416 mA	±10 µF	80%	JCD0412D24
18-36 VDC	3.3 V	1200 mA	20 mA	216 mA	1000 µF	77%	JCD0424S3V3
	5.0 V	800 mA	20 mA	208 mA	1000 µF	80%	JCD0424S05
	9.0 V	444 mA	20 mA	203 mA	470 µF	82%	JCD0424S09
	12.0 V	333 mA	20 mA	198 mA	330 µF	84%	JCD0424S12
	15.0 V	266 mA	20 mA	203 mA	330 µF	82%	JCD0424S15
	24.0 V	166 mA	20 mA	200 mA	1000 µF	83%	JCD0424S24
	±3.3 V	±600 mA	20 mA	216 mA	±1000 µF	77%	JCD0424D03
	±5.0 V	±400 mA	20 mA	208 mA	±330 µF	80%	JCD0424D05
	±9.0 V	±220 mA	20 mA	200 mA	±220 µF	83%	JCD0424D09
	±12.0 V	±166 mA	20 mA	200 mA	±68 µF	83%	JCD0424D12
	±15.0 V	±133 mA	20 mA	203 mA	±220 µF	82%	JCD0424D15
	±24.0 V	±83 mA	20 mA	210 mA	±47 µF	79%	JCD0424D24
36-72 VDC	3.3 V	1200 mA	15 mA	108 mA	1000 µF	76%	JCD0448S3V3
	5.0 V	800 mA	15 mA	104 mA	1000 µF	80%	JCD0448S05
	9.0 V	444 mA	15 mA	100 mA	470 µF	83%	JCD0448S09
	12.0 V	333 mA	15 mA	99 mA	330 µF	84%	JCD0448S12
	15.0 V	266 mA	15 mA	102 mA	68 µF	81%	JCD0448S15
	24.0 V	166 mA	15 mA	98 mA	68 µF	85%	JCD0448S24
	±3.3 V	±600 mA	15 mA	109 mA	±1000 µF	76%	JCD0448D03
	±5.0 V	±400 mA	15 mA	104 mA	±470 µF	80%	JCD0448D05
	±9.0 V	±220 mA	15 mA	100 mA	±220 µF	83%	JCD0448D09
	±12.0 V	±166 mA	15 mA	100 mA	±220 µF	83%	JCD0448D12
	±15.0 V	±133 mA	15 mA	100 mA	±47 µF	83%	JCD0448D15
	±24.0 V	±83 mA	15 mA	105 mA	±100 µF	79%	JCD0448D24

Notes

- When one output is set at 100% load and the other varies between 25% & 100% load.
- Measured with 20 MHz bandwidth and 1 µF ceramic capacitor across output rails.
- Input current specified at nominal 5 V, 12 V, 24 V or 48 V input.
- For optional 3500 VDC isolation add suffix -H to part number e.g. JCD0424S12-H

Mechanical Details

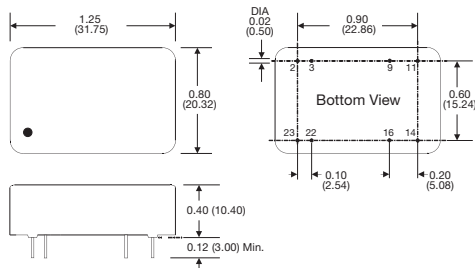


Pin	Single	Dual
2	-Vin	-Vin
3	-Vin	-Vin
9	No Pin	Common
11	N.C.	-Vout
14	+Vout	+Vout
16	-Vout	Common
22	+Vin	+Vin
23	+Vin	+Vin

Notes


- All dimensions are in inches (mm)
- Weight: 0.04 lbs (18 g) approx.
- Pin diameter: 0.02 ±0.002 (0.5 ±0.005)
- Pin pitch and length tolerance: ±0.014 (±0.35)
- Case tolerance: ±0.02 (±0.5)
- Package: 24 pin DIL nickel-coated copper

Application Notes

Derating Curve

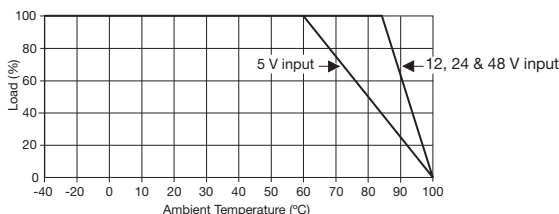

Input Filter

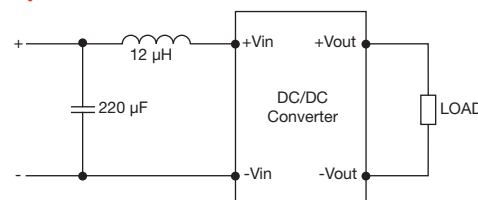


Models and Ratings

Input Voltage	Output Voltage	Output Current	Input Current ⁽¹⁾		Maximum Capacitive Load	Efficiency	Model Number ⁽⁴⁾
			No Load	Full Load			
4.5-9 VDC	3.3 V	1300 mA	25 mA	1159 mA	1000 µF	74%	JCD0505S3V3
	5.0 V	1000 mA	25 mA	1298 mA	1000 µF	77%	JCD0505S05
	12.0 V	417 mA	30 mA	1220 mA	330 µF	82%	JCD0505S12
	15.0 V	333 mA	30 mA	1218 mA	220 µF	82%	JCD0505S15
	±3.3 V	±750 mA	25 mA	1302 mA	±680 µF	76%	JCD0505D03
	±5.0 V	±500 mA	30 mA	1265 mA	±330 µF	79%	JCD0505D05
	±12.0 V	±208 mA	35 mA	1217 mA	±100 µF	82%	JCD0505D12
	±15.0 V	±167 mA	40 mA	1221 mA	±47 µF	82%	JCD0505D15
9-18 VDC	3.3 V	1300 mA	30 mA	483 mA	1000 µF	74%	JCD0512S3V3
	5.0 V	1000 mA	30 mA	541 mA	1000 µF	77%	JCD0512S05
	9.0 V	555 mA	30 mA	520 mA	470 µF	80%	JCD0512S09
	12.0 V	417 mA	30 mA	508 mA	330 µF	82%	JCD0512S12
	15.0 V	333 mA	30 mA	508 mA	100 µF	82%	JCD0512S15
	24.0 V	208 mA	30 mA	508 mA	68 µF	82%	JCD0512S24
	±3.3 V	±750 mA	30 mA	595 mA	±1000 µF	70%	JCD0512D03
	±5.0 V	±500 mA	30 mA	541 mA	±1000 µF	77%	JCD0512D05
	±9.0 V	±278 mA	30 mA	527 mA	±330 µF	79%	JCD0512D09
	±12.0 V	±208 mA	30 mA	520 mA	±47 µF	80%	JCD0512D12
	±15.0 V	±167 mA	30 mA	527 mA	±47 µF	79%	JCD0512D15
	±24.0 V	±104 mA	30 mA	514 mA	±10 µF	81%	JCD0512D24
18-36 VDC	3.3 V	1300 mA	20 mA	239 mA	1000 µF	75%	JCD0524S3V3
	5.0 V	1000 mA	20 mA	261 mA	1000 µF	80%	JCD0524S05
	9.0 V	555 mA	20 mA	254 mA	470 µF	82%	JCD0524S09
	12.0 V	417 mA	20 mA	251 mA	1000 µF	83%	JCD0524S12
	15.0 V	333 mA	20 mA	248 mA	220 µF	84%	JCD0524S15
	24.0 V	208 mA	20 mA	248 mA	1000 µF	84%	JCD0524S24
	±3.3 V	±750 mA	20 mA	274 mA	±470 µF	76%	JCD0524D03
	±5.0 V	±500 mA	20 mA	263 mA	±680 µF	79%	JCD0524D05
	±9.0 V	±278 mA	20 mA	251 mA	±220 µF	83%	JCD0524D09
	±12.0 V	±208 mA	20 mA	251 mA	±220 µF	83%	JCD0524D12
	±15.0 V	±167 mA	20 mA	251 mA	±22 µF	83%	JCD0524D15
	±24.0 V	±104 mA	20 mA	254 mA	±22 µF	82%	JCD0524D24
36-72 VDC	3.3 V	1300 mA	12 mA	117 mA	1000 µF	76%	JCD0548S3V3
	5.0 V	1000 mA	12 mA	130 mA	1000 µF	80%	JCD0548S05
	9.0 V	555 mA	12 mA	124 mA	100 µF	84%	JCD0548S09
	12.0 V	417 mA	12 mA	132 mA	470 µF	80%	JCD0548S12
	15.0 V	333 mA	12 mA	127 mA	330 µF	82%	JCD0548S15
	24.0 V	208 mA	12 mA	122 mA	220 µF	85%	JCD0548S24
	±3.3 V	±750 mA	12 mA	140 mA	±1000 µF	74%	JCD0548D03
	±5.0 V	±500 mA	12 mA	130 mA	±470 µF	80%	JCD0548D05
	±9.0 V	±278 mA	12 mA	127 mA	±220 µF	82%	JCD0548D09
	±12.0 V	±208 mA	12 mA	124 mA	±100 µF	84%	JCD0548D12
	±15.0 V	±167 mA	12 mA	128 mA	±220 µF	81%	JCD0548D15
	±24.0 V	±104 mA	12 mA	128 mA	±22 µF	81%	JCD0548D24

Notes

- When one output is set at 100% load and the other varies between 25% & 100% load.
- Measured with 20 MHz bandwidth and 1 µF ceramic capacitor across output rails.
- Input current specified at nominal 5 V, 12 V, 24 V or 48 V input.
- For optional 3500 VDC isolation add suffix -H to part number e.g. JCD0524S12-H

Mechanical Details

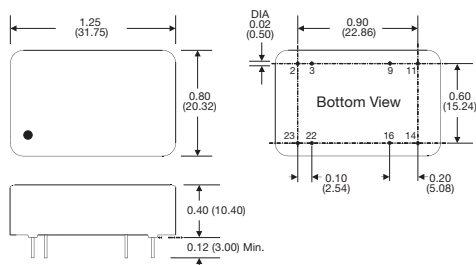


Pin	Single	Dual
2	-Vin	-Vin
3	-Vin	-Vin
9	No Pin	Common
11	N.C.	-Vout
14	+Vout	+Vout
16	-Vout	Common
22	+Vin	+Vin
23	+Vin	+Vin

Notes


- All dimensions are in inches (mm)
- Weight: 0.04 lbs (18 g) approx.
- Pin diameter: 0.02 ±0.002 (0.5 ±0.005)
- Pin pitch and length tolerance: ±0.014 (±0.35)
- Case tolerance: ±0.02 (±0.5)
- Package: 24 pin DIL nickel-coated copper

Application Notes

Derating Curve

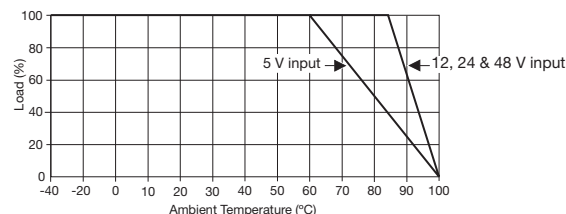

Input Filter

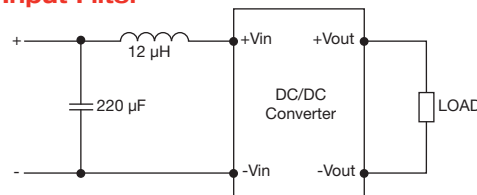


Models and Ratings

Input Voltage	Output Voltage	Output Current	Input Current ⁽¹⁾		Maximum Capacitive Load	Efficiency	Model Number ⁽⁴⁾
			No Load	Full Load			
4.5-9 VDC	3.3 V	1400 mA	25 mA	1232 mA	1000 µF	75%	JCD0605S3V3
	5.0 V	1200 mA	25 mA	1558 mA	1000 µF	77%	JCD0605S05
	12.0 V	500 mA	25 mA	1445 mA	330 µF	83%	JCD0605S12
	15.0 V	400 mA	30 mA	1445 mA	220 µF	83%	JCD0605S15
	±3.3 V	±909 mA	25 mA	1578 mA	±680 µF	76%	JCD0605D03
	±5.0 V	±600 mA	25 mA	1500 mA	±330 µF	80%	JCD0605D05
	±12.0 V	±250 mA	35 mA	1428 mA	±100 µF	84%	JCD0605D12
	±15.0 V	±200 mA	40 mA	1428 mA	±47 µF	84%	JCD0605D15
9-18 VDC	3.3 V	1400 mA	30 mA	520 mA	220 µF	74%	JCD0612S3V3
	5.0 V	1200 mA	30 mA	649 mA	1000 µF	77%	JCD0612S05
	9.0 V	666 mA	30 mA	632 mA	680 µF	79%	JCD0612S09
	12.0 V	500 mA	30 mA	617 mA	1000 µF	81%	JCD0612S12
	15.0 V	400 mA	30 mA	604 mA	100 µF	82%	JCD0612S15
	24.0 V	250 mA	30 mA	617 mA	100 µF	81%	JCD0612S24
	±3.3 V	±909 mA	30 mA	675 mA	±1000 µF	74%	JCD0612D03
	±5.0 V	±600 mA	30 mA	657 mA	±680 µF	76%	JCD0612D05
	±9.0 V	±333 mA	30 mA	617 mA	±22 µF	81%	JCD0612D09
	±12.0 V	±250 mA	30 mA	632 mA	±330 µF	79%	JCD0612D12
	±15.0 V	±200 mA	30 mA	625 mA	±100 µF	80%	JCD0612D15
	±24.0 V	±125 mA	30 mA	625 mA	±10 µF	80%	JCD0612D24
18-36 VDC	3.3 V	1400 mA	20 mA	256 mA	1000 µF	75%	JCD0624S3V3
	5.0 V	1200 mA	20 mA	313 mA	1000 µF	80%	JCD0624S05
	9.0 V	666 mA	20 mA	301 mA	680 µF	83%	JCD0624S09
	12.0 V	500 mA	20 mA	301 mA	1000 µF	83%	JCD0624S12
	15.0 V	400 mA	20 mA	301 mA	100 µF	83%	JCD0624S15
	24.0 V	250 mA	20 mA	294 mA	470 µF	85%	JCD0624S24
	±3.3 V	±909 mA	20 mA	328 mA	±1000 µF	76%	JCD0624D03
	±5.0 V	±600 mA	20 mA	308 mA	±680 µF	81%	JCD0624D05
	±9.0 V	±333 mA	20 mA	301 mA	±220 µF	83%	JCD0624D09
	±12.0 V	±250 mA	20 mA	301 mA	±470 µF	83%	JCD0624D12
	±15.0 V	±200 mA	20 mA	301 mA	±100 µF	83%	JCD0624D15
	±24.0 V	±125 mA	20 mA	304 mA	±100 µF	82%	JCD0624D24
36-72 VDC	3.3 V	1400 mA	12 mA	128 mA	2200 µF	75%	JCD0648S3V3
	5.0 V	1200 mA	12 mA	156 mA	1000 µF	80%	JCD0648S05
	9.0 V	666 mA	12 mA	148 mA	1000 µF	84%	JCD0648S09
	12.0 V	500 mA	12 mA	148 mA	470 µF	84%	JCD0648S12
	15.0 V	400 mA	12 mA	154 mA	1000 µF	81%	JCD0648S15
	24.0 V	250 mA	12 mA	147 mA	220 µF	85%	JCD0648S24
	±3.3 V	±909 mA	12 mA	164 mA	±1000 µF	76%	JCD0648D03
	±5.0 V	±600 mA	12 mA	156 mA	±680 µF	80%	JCD0648D05
	±9.0 V	±333 mA	12 mA	150 mA	±680 µF	83%	JCD0648D09
	±12.0 V	±250 mA	12 mA	148 mA	±330 µF	84%	JCD0648D12
	±15.0 V	±200 mA	12 mA	152 mA	±330 µF	82%	JCD0648D15
	±24.0 V	±125 mA	12 mA	150 mA	±150 µF	83%	JCD0648D24

Notes

- When one output is set at 100% load and the other varies between 25% & 100% load.
- Measured with 20 MHz bandwidth and 1 µF ceramic capacitor across output rails.
- Input current specified at nominal 5 V, 12 V, 24 V or 48 V input.
- For optional 3500 VDC isolation add suffix -H to part number e.g. JCD0624S12-H

Mechanical Details

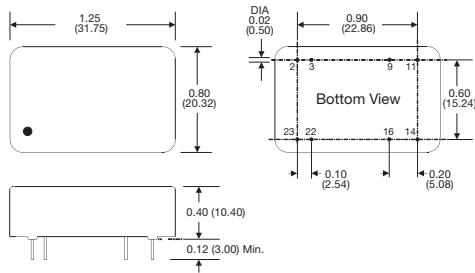


Pin	Single	Dual
2	-Vin	-Vin
3	-Vin	-Vin
9	No Pin	Common
11	N.C.	-Vout
14	+Vout	+Vout
16	-Vout	Common
22	+Vin	+Vin
23	+Vin	+Vin

Notes

- All dimensions are in inches (mm)
- Weight: 0.04 lbs (18 g) approx.
- Pin diameter: 0.02 ±0.002 (0.5 ±0.005)
- Pin pitch and length tolerance: ±0.014 (±0.35)
- Case tolerance: ±0.02 (±0.5)
- Package: 24 pin DIL nickel-coated copper

Application Notes

Derating Curve

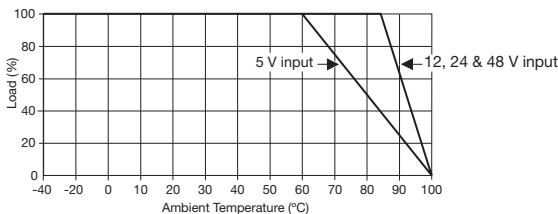

Input Filter

