



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



JCJ Series



- 2:1 Input Range
- DIP-24 Metal Package
- Operating Temperature $-40\text{ }^{\circ}\text{C}$ to $+100\text{ }^{\circ}\text{C}$
- Single & Dual Outputs
- Continuous Short Circuit Protection
- 1500 VDC Isolation
- 3 Year Warranty

Specification

Input

Input Voltage Range	<ul style="list-style-type: none"> • 12 V (9-18 VDC) • 24 V (18-36 VDC) • 48 V (36-75 VDC)
Input Current	<ul style="list-style-type: none"> • See table
Input Filter	<ul style="list-style-type: none"> • Pi network
Input Reflected Ripple Current	<ul style="list-style-type: none"> • JCJ08: 35 mA, JCJ10: 20 mA pk-pk through 12 μH inductor
Input Surge	<ul style="list-style-type: none"> • 12 V models 24/25 VDC for 100 ms • 24 V models 40/50 VDC for 100 ms • 48 V models 100 VDC for 100 ms
Undervoltage Lockout	<ul style="list-style-type: none"> • None
Reverse Voltage Protection	<ul style="list-style-type: none"> • None

Output

Output Voltage	<ul style="list-style-type: none"> • See table
Output Voltage Balance	<ul style="list-style-type: none"> • $\pm 1\%$ max, dual output models
Minimum Load	<ul style="list-style-type: none"> • No minimum load required
Initial Set Accuracy	<ul style="list-style-type: none"> • $\pm 1\%$ max
Line Regulation	<ul style="list-style-type: none"> • $\pm 0.5\%$ max
Load Regulation	<ul style="list-style-type: none"> • $\pm 0.7\%$ for 2.5-3.3 V models, $\pm 0.5\%$ for all other models (see note 2)
Cross Regulation	<ul style="list-style-type: none"> • $\pm 5\%$ on dual output models (see note 3)
Transient Response	<ul style="list-style-type: none"> • $< 3\%$ max deviation, recovery to within 1% in 200 μs for a 25% load change
Ripple & Noise	<ul style="list-style-type: none"> • 75 mV pk-pk, 20 MHz bandwidth, (see note 4)
Overvoltage Protection	<ul style="list-style-type: none"> • JCJ10: 3.3 V models: 3.9 V typ., 5 V models: 6.2 V typ., 12 V models: 15.0 V typ., 15 V models: 18.0 V typ., $\pm 12\text{ V}$ models: $\pm 15.0\text{ V}$ typ., $\pm 15\text{ V}$ models: $\pm 18.0\text{ V}$ typ. JCJ08: No OVP
Overload Protection	<ul style="list-style-type: none"> • $> 150\%$ of full load
Short Circuit Protection	<ul style="list-style-type: none"> • Trip & restart (hiccup) with auto recovery
Maximum Capacitive Load	<ul style="list-style-type: none"> • See tables
Temperature Coefficient	<ul style="list-style-type: none"> • $\pm 0.02/^{\circ}\text{C}$ max

General

Efficiency	<ul style="list-style-type: none"> • See tables
Isolation	<ul style="list-style-type: none"> • 1500 VDC Input to Output • 1000 VDC Input to Case • 1000 VDC Output to Case
Isolation Capacitance	<ul style="list-style-type: none"> • 1200 pF max
Switching Frequency	<ul style="list-style-type: none"> • 330 kHz typical
Power Density	<ul style="list-style-type: none"> • JCJ10: 25 W/in³ • JCJ08: 20 W/in³
MTBF	<ul style="list-style-type: none"> • $> 900\text{ KHrs}$ to MIL-HDBK-217F at 25 $^{\circ}\text{C}$, GB

Environmental

Operating Temperature	<ul style="list-style-type: none"> • $-40\text{ }^{\circ}\text{C}$ to $+100\text{ }^{\circ}\text{C}$, derate from 100% load at $+60\text{ }^{\circ}\text{C}$ to no load at $+100\text{ }^{\circ}\text{C}$
Case Temperature	<ul style="list-style-type: none"> • $+100\text{ }^{\circ}\text{C}$ max
Storage Temperature	<ul style="list-style-type: none"> • $-40\text{ }^{\circ}\text{C}$ to $+125\text{ }^{\circ}\text{C}$
Humidity	<ul style="list-style-type: none"> • Up to 95% RH, non-condensing
Cooling	<ul style="list-style-type: none"> • Natural convection

EMC


Emissions	<ul style="list-style-type: none"> • EN55022 Class A conducted & radiated with external components, see application note
ESD Immunity	<ul style="list-style-type: none"> • EN61000-4-2, 8 kV air discharge, 4 kV contact discharge • JCJ10: 6 kV contact discharge, Perf Criteria A
EFT/Burst	<ul style="list-style-type: none"> • EN61000-4-4, level 1 • JCJ10: level 3, Perf Criteria A, (see note 5)
Surge	<ul style="list-style-type: none"> • JCJ08: EN61000-4-5, installation class 2, JCJ10: installation class 3, Perf Criteria A, (see note 5)
Conducted Immunity	<ul style="list-style-type: none"> • EN61000-4-6, 3 Vrms • JCJ10: 10 Vrms, Perf Criteria A
Magnetic Field	<ul style="list-style-type: none"> • EN61000-4-8, 1 A/m Perf Criteria A

Input Voltage	Output Voltage	Output Current	Input Current ⁽¹⁾		Maximum Capacitive Load	Efficiency	Model Number
			No Load	Full Load			
9-18 V	3.3 V	2.000 A	20 mA	0.69 A	3300 µF	80%	JCJ0812S3V3
	5.0 V	1.500 A	20 mA	0.76 A	2200 µF	82%	JCJ0812S05
	12.0 V	0.665 A	20 mA	0.78 A	470 µF	85%	JCJ0812S12
	15.0 V	0.535 A	20 mA	0.80 A	220 µF	83%	JCJ0812S15
	±5.0 V	±0.800 A	20 mA	0.81 A	±1000 µF	82%	JCJ0812D05
	±12.0 V	±0.335 A	20 mA	0.79 A	±220 µF	84%	JCJ0812D12
18-36 V	3.3 V	2.000 A	15 mA	0.34 A	3300 µF	80%	JCJ0824S3V3
	5.0 V	1.500 A	15 mA	0.38 A	2200 µF	82%	JCJ0824S05
	12.0 V	0.665 A	15 mA	0.39 A	470 µF	85%	JCJ0824S12
	15.0 V	0.535 A	15 mA	0.40 A	220 µF	84%	JCJ0824S15
	±5.0 V	±0.800 A	15 mA	0.41 A	±1000 µF	82%	JCJ0824D05
	±12.0 V	±0.335 A	15 mA	0.40 A	±220 µF	83%	JCJ0824D12
36-75 V	3.3 V	2.000 A	15 mA	0.17 A	3300 µF	80%	JCJ0848S3V3
	5.0 V	1.500 A	15 mA	0.19 A	2200 µF	82%	JCJ0848S05
	12.0 V	0.665 A	15 mA	0.20 A	470 µF	84%	JCJ0848S12
	15.0 V	0.535 A	15 mA	0.20 A	220 µF	84%	JCJ0848S15
	±5.0 V	±0.800 A	15 mA	0.20 A	±1000 µF	82%	JCJ0848D05
	±12.0 V	±0.335 A	15 mA	0.20 A	±220 µF	85%	JCJ0848D12
9-18 V	2.5 V	3.000 A	10 mA	0.79 A	2200 µF	81%	JCJ1012S2V5
	3.3 V	3.000 A	10 mA	1.01 A	2200 µF	84%	JCJ1012S3V3
	5.0 V	2.000 A	10 mA	0.99 A	2200 µF	86%	JCJ1012S05
	12.0 V	0.833 A	10 mA	0.98 A	820 µF	87%	JCJ1012S12
	15.0 V	0.667 A	10 mA	0.96 A	470 µF	89%	JCJ1012S15
	±12.0 V	±0.416 A	10 mA	0.98 A	±220 µF	87%	JCJ1012D12
18-36 V	2.5 V	3.000 A	10 mA	0.38 A	2200 µF	84%	JCJ1024S2V5
	3.3 V	3.000 A	10 mA	0.50 A	2200 µF	85%	JCJ1024S3V3
	5.0 V	2.000 A	10 mA	0.48 A	2200 µF	89%	JCJ1024S05
	12.0 V	0.833 A	10 mA	0.49 A	820 µF	88%	JCJ1024S12
	15.0 V	0.667 A	10 mA	0.49 A	470 µF	88%	JCJ1024S15
	±12.0 V	±0.416 A	10 mA	0.49 A	±220 µF	88%	JCJ1024D12
36-75 V	2.5 V	3.000 A	10 mA	0.19 A	2200 µF	84%	JCJ1048S2V5
	3.3 V	3.000 A	10 mA	0.25 A	2200 µF	85%	JCJ1048S3V3
	5.0 V	2.000 A	10 mA	0.24 A	2200 µF	88%	JCJ1048S05
	12.0 V	0.833 A	10 mA	0.25 A	820 µF	87%	JCJ1048S12
	15.0 V	0.667 A	10 mA	0.24 A	470 µF	88%	JCJ1048S15
	±12.0 V	±0.416 A	10 mA	0.25 A	±220 µF	87%	JCJ1048D12
36-75 V	2.5 V	3.000 A	10 mA	0.19 A	2200 µF	84%	JCJ1048S2V5
	3.3 V	3.000 A	10 mA	0.25 A	2200 µF	85%	JCJ1048S3V3
	5.0 V	2.000 A	10 mA	0.24 A	2200 µF	88%	JCJ1048S05
	12.0 V	0.833 A	10 mA	0.25 A	820 µF	87%	JCJ1048S12
	15.0 V	0.667 A	10 mA	0.24 A	470 µF	88%	JCJ1048S15
	±12.0 V	±0.416 A	10 mA	0.25 A	±220 µF	87%	JCJ1048D12

Notes

1. Input current measured at nominal input voltage.
2. From 10% to 100% load.
3. When one output is set at 100% load and the other varied between 25% and 100% load
4. Measured with 20 MHz bandwidth and 1 µF ceramic capacitor across output rails.
5. A 220 µF/100 V capacitor across the input is required to meet EN61000-4-4 and EN61000-4-5

Mechanical Details and Application Note

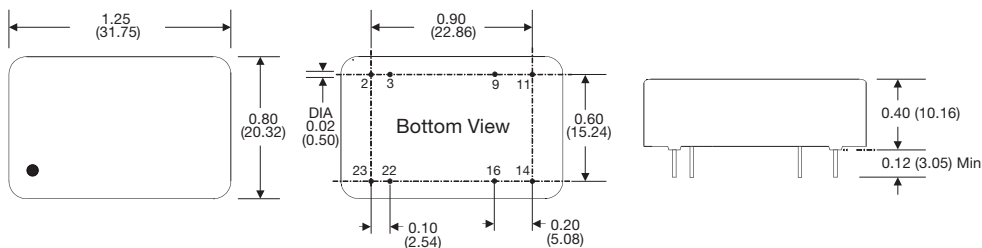

Pin Connections					
Pin	Single	Dual	Pin	Single	Dual
2	-Vin	-Vin	14	+Vout	+Vout
3	-Vin	-Vin	16	-Vout	Common
9	No Pin	Common	22	+Vin	+Vin
11	N.C.	-Vout	23	+Vin	+Vin

Notes

1. All dimensions are in inches (mm)
2. Weight: 0.04 lbs (17 g) approx.
3. Pin pitch and length tolerance: ±0.014 (±0.35)
4. Pin diameter tolerance: 0.02 ±0.002 (0.5 ±0.05)
5. Case tolerance: ±0.02 (±0.5)
6. Package: 24 in DIL nickel-coated copper.

Input Filter

