



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# 15 Watts

## JCK Series



- 2:1 Input Range
- Industry Standard Package
- 1500 VDC Isolation
- Continuous Short Circuit Protection
- High Efficiency – up to 89%
- -40 °C to +100 °C Operating Temperature
- 3 Year Warranty

### Specification

#### Input

Input Voltage Range	<ul style="list-style-type: none"> <li>• 12 V (9-18 VDC)</li> <li>• 24 V (18-36 VDC)</li> <li>• 48 V (36-75 VDC)</li> </ul>
Input Current	<ul style="list-style-type: none"> <li>• See table</li> </ul>
Input Reflected Ripple Current	<ul style="list-style-type: none"> <li>• 20 mA rms through 12 <math>\mu</math>H inductor, 5 Hz to 20 MHz</li> </ul>
Under Voltage Lockout	<ul style="list-style-type: none"> <li>• 12 V models On 8.6 V, Off 7.9 V typical</li> <li>• 24 V models On 17.8 V, Off 16 V typical</li> <li>• 48 V models On 33.5 V, Off 30.5 V typical</li> </ul>
Input Surge	<ul style="list-style-type: none"> <li>• 12 V models 30 VDC for 100 ms</li> <li>• 24 V models 50 VDC for 100 ms</li> <li>• 48 V models 100 VDC for 100 ms</li> </ul>

#### Output

Output Voltage	<ul style="list-style-type: none"> <li>• See table</li> </ul>
Minimum Load	<ul style="list-style-type: none"> <li>• No minimum load required</li> </ul>
Line Regulation	<ul style="list-style-type: none"> <li>• <math>\pm 0.5\%</math> max</li> </ul>
Load Regulation	<ul style="list-style-type: none"> <li>• <math>\pm 0.5\%</math> max for single and dual outputs except <math>\pm 0.8\%</math> for D03 versions</li> </ul>
Cross Regulation	<ul style="list-style-type: none"> <li>• <math>\pm 5\%</math> max on dual output models (see note 2)</li> </ul>
Setpoint Accuracy	<ul style="list-style-type: none"> <li>• <math>\pm 1.0\%</math> max</li> </ul>
Start Up Delay	<ul style="list-style-type: none"> <li>• &lt;20 ms</li> </ul>
Start Up Rise Time	<ul style="list-style-type: none"> <li>• &lt;5 ms</li> </ul>
Ripple & Noise	<ul style="list-style-type: none"> <li>• 75 mV pk-pk max (see note 3)</li> </ul>
Transient Response	<ul style="list-style-type: none"> <li>• <math>\pm 3\%</math> max deviation, recovery to within 1% in 250 <math>\mu</math>s for a 25% load change</li> </ul>
Temperature Coefficient	<ul style="list-style-type: none"> <li>• 0.02%/°C</li> </ul>
Overload Protection	<ul style="list-style-type: none"> <li>• &gt;140% of full load at nominal input</li> </ul>
Short Circuit Protection	<ul style="list-style-type: none"> <li>• Trip &amp; restart (hiccup mode) with auto recovery</li> </ul>
Maximum Capacitive Load	<ul style="list-style-type: none"> <li>• See table</li> </ul>

#### General

Efficiency	<ul style="list-style-type: none"> <li>• See table</li> </ul>
Isolation Voltage	<ul style="list-style-type: none"> <li>• 1600 VDC Input to Output, optional 3500 V (see note 4)</li> <li>• 1600 VDC Input to Case</li> <li>• 1600 VDC Output to Case</li> </ul>
Isolation Capacitance	<ul style="list-style-type: none"> <li>• 1200 pF typical</li> </ul>
Isolation Resistance	<ul style="list-style-type: none"> <li>• <math>10^9 \Omega</math> min</li> </ul>
Switching Frequency	<ul style="list-style-type: none"> <li>• 300 kHz typical</li> </ul>
Power Density	<ul style="list-style-type: none"> <li>• 18.75 W/in<sup>3</sup></li> </ul>
MTBF	<ul style="list-style-type: none"> <li>• &gt;1.1 Mhrs to MIL-HDBK-217F at 25 °C, GB</li> </ul>

#### Environmental

Operating Temperature	<ul style="list-style-type: none"> <li>• -40 °C to +100 °C, derate from 100% load at +70 °C to 0% load at +100 °C</li> </ul>
Case Temperature	<ul style="list-style-type: none"> <li>• +100 °C max</li> </ul>
Storage Temperature	<ul style="list-style-type: none"> <li>• -40 °C to +125 °C</li> </ul>
Cooling	<ul style="list-style-type: none"> <li>• Convection-cooled</li> </ul>
Operating Humidity	<ul style="list-style-type: none"> <li>• Up to 95% RH, non-condensing</li> </ul>

#### EMC

Emissions	<ul style="list-style-type: none"> <li>• EN55022, Class A conducted &amp; radiated with external components, see application note</li> </ul>
ESD Immunity	<ul style="list-style-type: none"> <li>• EN61000-4-2, 8 kV air, 6 kV contact, Perf Criteria A</li> </ul>
Radiated Immunity	<ul style="list-style-type: none"> <li>• EN61000-4-3 10 V/m, Perf Criteria A</li> </ul>
EFT/Burst	<ul style="list-style-type: none"> <li>• EN61000-4-4 level 3, Perf Criteria B*</li> </ul>
Surge	<ul style="list-style-type: none"> <li>• EN61000-4-5 level 2, Perf Criteria B*</li> </ul>
Conducted Immunity	<ul style="list-style-type: none"> <li>• EN61000-4-6 10 V/rms, Perf Criteria A</li> </ul>
Magnetic Field	<ul style="list-style-type: none"> <li>• EN61000-4-8 1 A/m, Perf Criteria A</li> </ul>

\*External input capacitor required 220  $\mu$ F/100 V.




## Models and Ratings

Input Voltage	Output Voltage	Output Current	Input Current <sup>(1)</sup>		Maximum Capacitive Load	Efficiency	Model Number <sup>(4)</sup>
			No Load	Full Load			
9-18 VDC	3.3 V	3.00 A	30 mA	1.03 A	3300 µF	82%	JCK1512S3V3
	5.0 V	3.00 A	30 mA	1.52 A	3300 µF	84%	JCK1512S05
	12.0 V	1.250 A	30 mA	1.45 A	1000 µF	88%	JCK1512S12
	15.0 V	1.000 A	30 mA	1.44 A	680 µF	89%	JCK1512S15
	±3.3 V	±1.500 A	30 mA	1.03 A	±1000 µF	82%	JCK1512D03
	±5.0 V	±1.500 A	30 mA	1.50 A	±1000 µF	85%	JCK1512D05
	±12.0 V	±0.625 A	30 mA	1.45 A	±470 µF	88%	JCK1512D12
	±15.0 V	±0.500 A	30 mA	1.45 A	±330 µF	88%	JCK1512D15
18-36 VDC	3.3 V	3.000 A	25 mA	0.52 A	3300 µF	82%	JCK1524S3V3
	5.0 V	3.000 A	25 mA	0.75 A	3300 µF	85%	JCK1524S05
	12.0 V	1.250 A	25 mA	0.72 A	1000 µF	89%	JCK1524S12
	15.0 V	1.000 A	25 mA	0.72 A	680 µF	89%	JCK1524S15
	±3.3 V	±1.500 A	25 mA	0.52 A	±1000 µF	82%	JCK1524D03
	±5.0 V	±1.500 A	25 mA	0.75 A	±1000 µF	85%	JCK1524D05
	±12.0 V	±0.625 A	25 mA	0.72 A	±470 µF	88%	JCK1524D12
	±15.0 V	±0.500 A	25 mA	0.72 A	±330 µF	88%	JCK1524D15
36-75 VDC	3.3 V	3.000 A	20 mA	0.26 A	3300 µF	82%	JCK1548S3V3
	5.0 V	3.000 A	20 mA	0.38 A	3300 µF	85%	JCK1548S05
	12.0 V	1.250 A	20 mA	0.36 A	1000 µF	89%	JCK1548S12
	15.0 V	1.000 A	20 mA	0.36 A	680 µF	89%	JCK1548S15
	±3.3 V	±1.500 A	20 mA	0.26 A	±1000 µF	82%	JCK1548D03
	±5.0 V	±1.500 A	20 mA	0.38 A	±1000 µF	85%	JCK1548D05
	±12.0 V	±0.625 A	20 mA	0.36 A	±470 µF	88%	JCK1548D12
	±15.0 V	±0.500 A	20 mA	0.36 A	±330 µF	88%	JCK1548D15

### Notes

1. Measured at nominal input voltage.
2. When one output is set at 100% load and other varied between 25% and 100% load.
3. Measured with 20 MHz bandwidth and 1 µF ceramic capacitor across output rails.
4. For optional 3.5 kV isolation version, add suffix -H to part number eg. JCK1524S12-H.
5. For heatsink option add '-HK' to the end of the part number.


## Mechanical Details

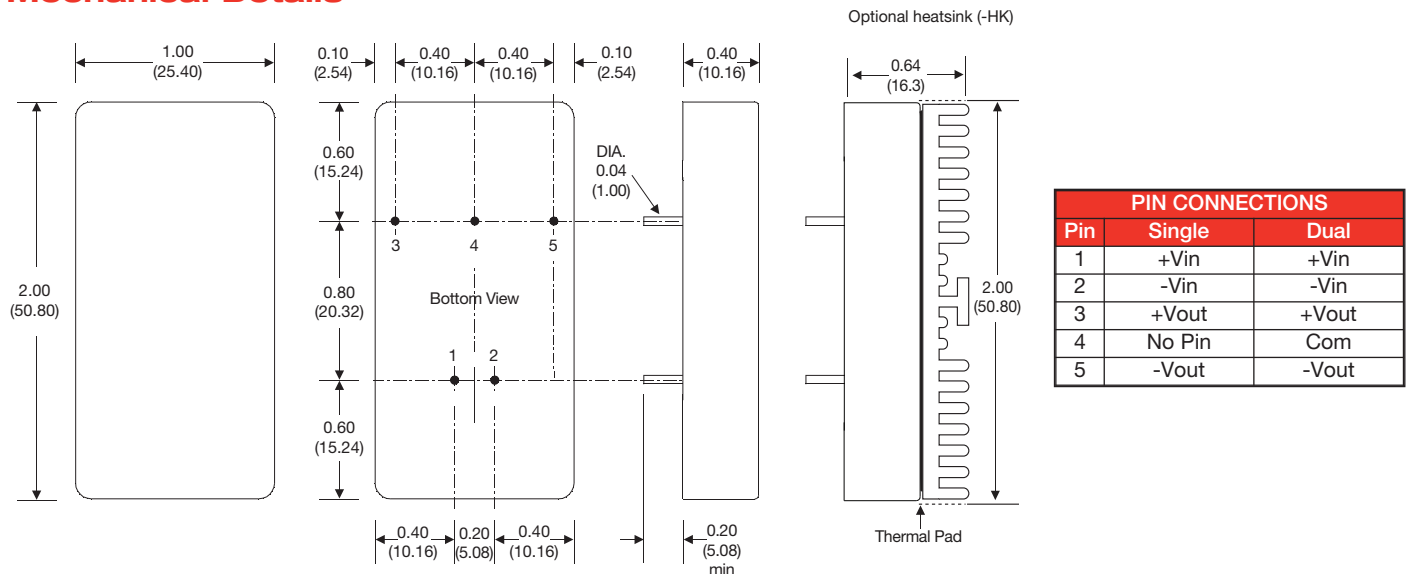

### Notes

1. All dimensions are in inches (mm).
2. Weight: 0.07 lbs (30 g)
3. Pin diameter: 0.04 ±0.002 (1.0 ±0.05)
4. Pin pitch tolerance: ±0.014 (±0.35)
5. Case tolerance: ±0.02 (±0.5)

Derating Curve

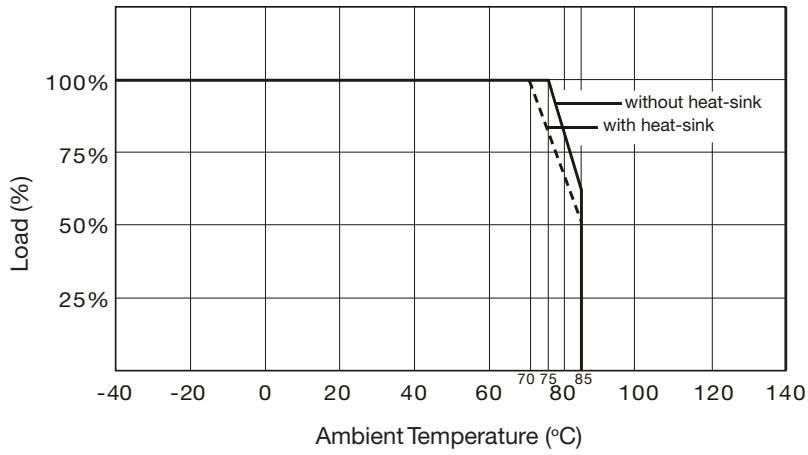

Input Filter

