



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



4

3

2

1

THIS DRAWING IS UNPUBLISHED.


RELEASED FOR PUBLICATION

© COPYRIGHT — TE Connectivity Ltd.



ALL RIGHTS RESERVED.

REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	—	SEE SHEET 1	—	—	—

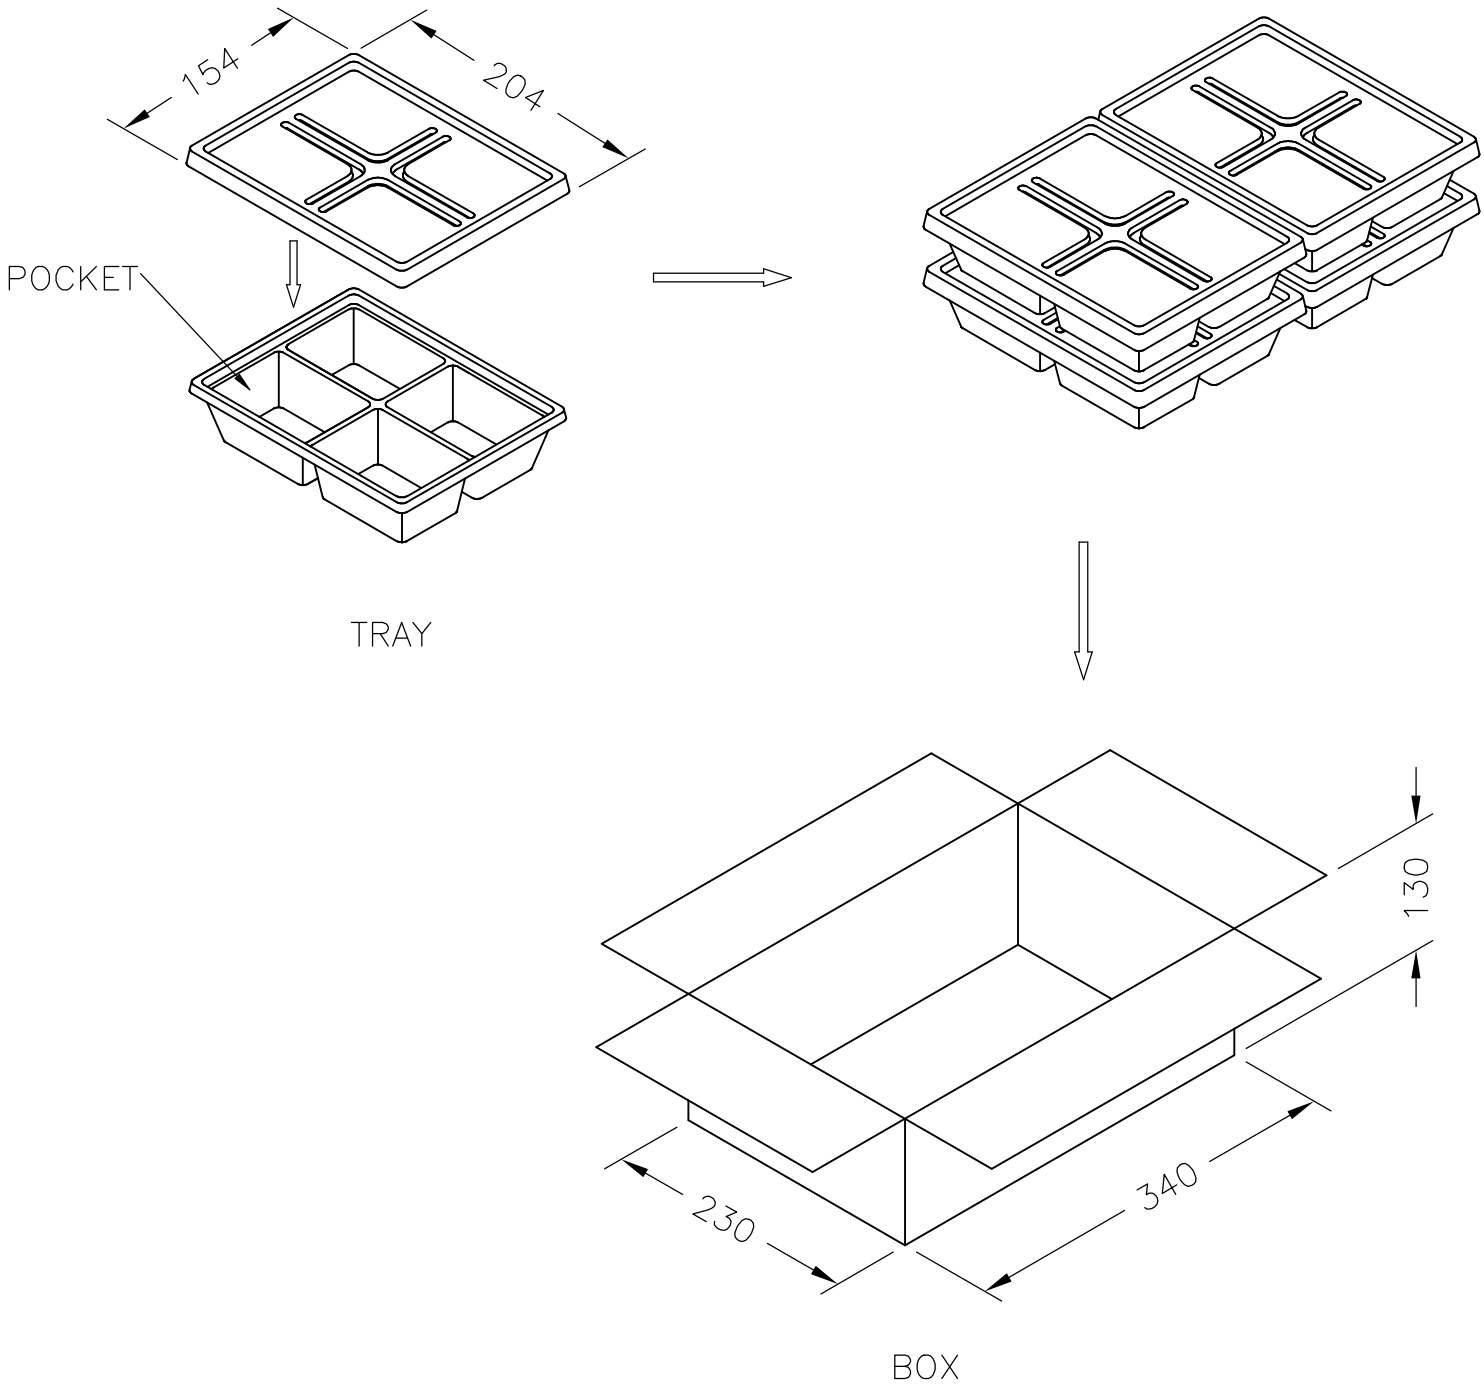

400 SWITCHES PER TRAY, 1,600 PER BOX

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN RAVI.S 20APR2018	 TE Connectivity Ltd.		
		CHK ALEXANDER SHARPE 20APR2018			
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD ALEXANDER SHARPE 20APR2018	NAME DETECTOR SWITCH, JJP SERIES, 10.6X10.0mm, VERTICAL, SNAP-IN, POSTS		
	0 PLC ± — 1 PLC ± — 2 PLC ± 0.30 3 PLC ± — 4 PLC ± — ANGLES ± —	PRODUCT SPEC —			
MATERIAL —	FINISH —	APPLICATION SPEC —	SIZE A3	CAGE CODE 00779	DRAWING NO C-2331331
		WEIGHT	RESTRICTED TO —		
CUSTOMER DRAWING			SCALE 1:1	SHEET 2 of 3	REV A

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	—	SEE SHEET 1	—	—	—

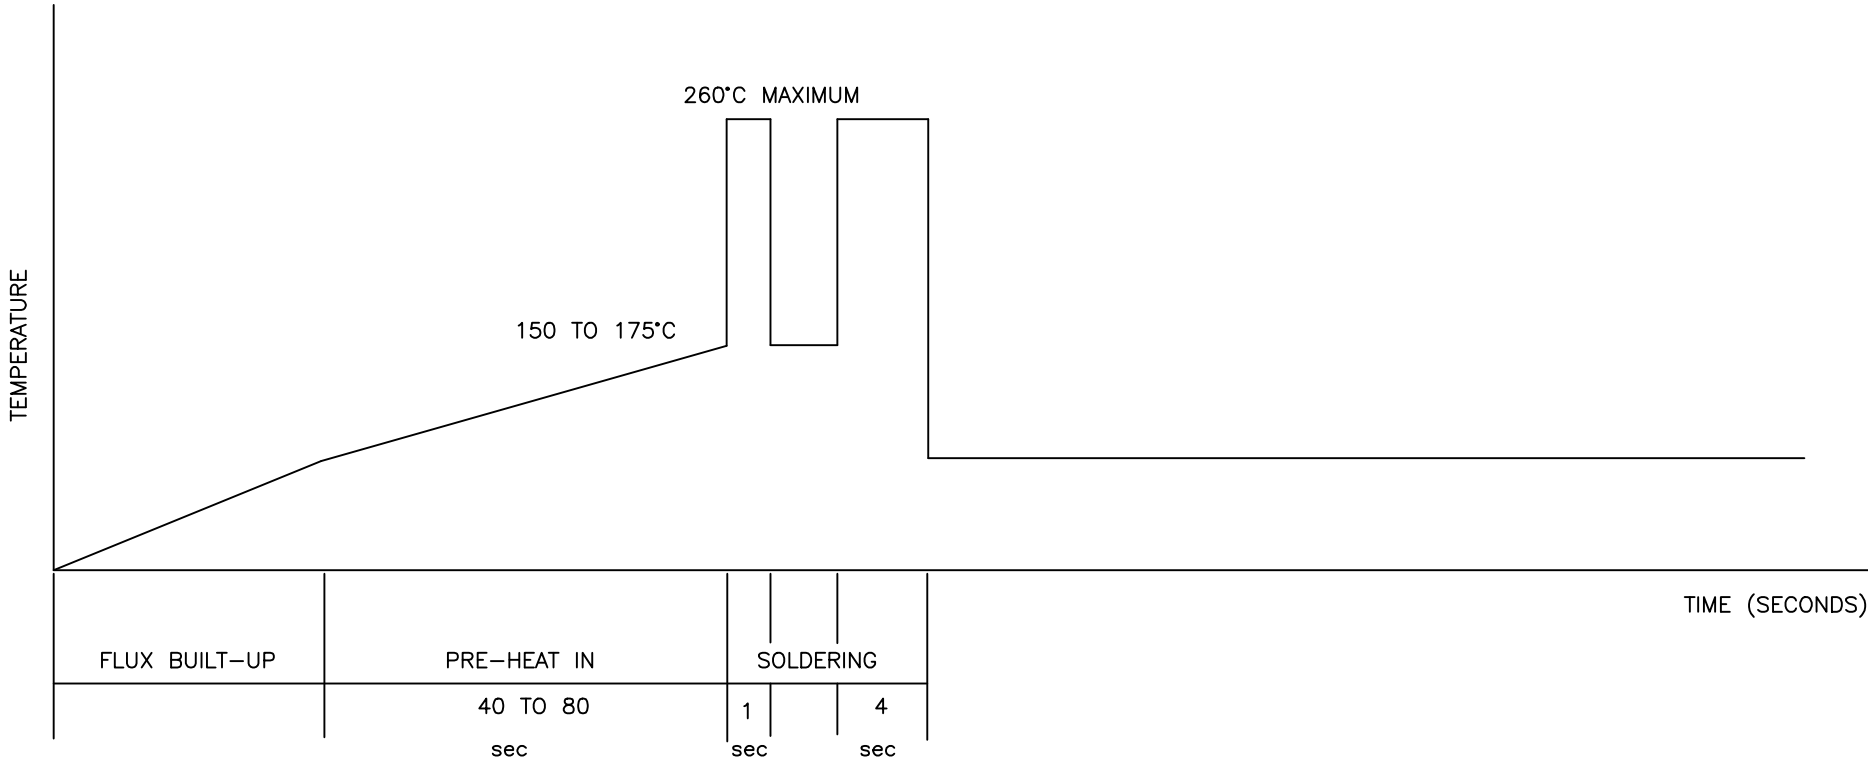

1. RATING: DC 5V 1.0mA
2. OPERATING FORCE: 50gf(MAX)
3. CONTACT RESISTANCE: 500mΩ(MAX)
4. LIFE CYCLE: 100,000 CYCLES WITHOUT LOAD
5. INSULATION RESISTANCE: 100MΩ MINIMUM
6. OPERATING TEMPERATURE: −10 TO 60°C
7. COMPLIANCE— ALL MATERIALS AND FINISHES SHALL COMPLY WITH EU DIRECTIVE 2002/95/EC OF 27JAN 2003 (RoHS)

TEMPERATURE PROFILE

SOLDERING CONDITIONS:

1. PREHEAT: 150 TO 175°C, 40 TO 80 SECONDS
2. PEAK TEMPERATURE: 260°C MAXIMUM
3. SOLDERING AREA TEMPERATURE: 260°C, 1 TO 4 SECONDS, 2 TIMES MAXIMUM

JJPHOUS830NOPPRLO	2331331−1
SMART PART NUMBER	PART NUMBER

—	—	SILVER CLAD	COPPER ALLOY	CONTACTOR
—	—	SILVER PLATING	BRASS	TERMINAL
NATURAL	UL 94HB	—	THERMOPLASTIC	ACTUATOR
BLACK	UL 94HB	—	THERMOPLASTIC	COVER
BLACK	UL 94HB	—	THERMOPLASTIC	CASE
COLOR	RATING	FINISH	MATERIAL	PART NAME

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 20APR2018 RAVI.S	TE Connectivity Ltd.		
		CHK 20APR2018 ALEXANDER SHARPE			
DIMENSIONS: mm	<p>TOLERANCES UNLESS OTHERWISE SPECIFIED:</p> <p>0 PLC ± − 1 PLC ± − 2 PLC ± 0.30 3 PLC ± − 4 PLC ± − ANGLES ± −</p>	APVD 20APR2018 ALEXANDER SHARPE	NAME DETECTOR SWITCH, JJP SERIES, 10.6X10.0mm, VERTICAL, SNAP-IN, POSTS		
		PRODUCT SPEC			
		APPLICATION SPEC			
MATERIAL		FINISH	WEIGHT		
—	—	—	—		
CUSTOMER DRAWING			SCALE 1:1	SHEET 3 of 3	REV A