



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



8 Watts

- Regulated Single & Dual Output
- 2:1 Input Range
- DIP16 Package
- 1500 VDC Isolation
- Operating Temperature -40 °C to +105 °C
- ITE Safety Approvals
- High Power Density
- Metal Case
- 3 Year Warranty



Dimensions:

JSE08:
0.94 x 0.54 x 0.31" (23.8 x 13.7 x 8.0 mm)

Models & Ratings



Input voltage	Output voltage	Output current	Input current ⁽¹⁾		Maximum capacitive load ⁽²⁾	Efficiency	Model number
			No load	Full load			
9-18V	3V3	1600 mA	10 mA	565 mA	680 µF	78%	JSE0812S3V3
	5 V	1600 mA		825 mA	680 µF	81%	JSE0812S05
	12 V	665 mA		790 mA	330 µF	84%	JSE0812S12
	15 V	535 mA		795 mA	330 µF	84%	JSE0812S15
	24 V	335 mA		790 mA	150 µF	85%	JSE0812S24
	±12 V	±335 mA		790 mA	±150 µF	85%	JSE0812D12
	±15 V	±265 mA		790 mA	±150 µF	84%	JSE0812D15
18-36V	3V3	1600 mA	10 mA	280 mA	680 µF	78%	JSE0824S3V3
	5 V	1600 mA		405 mA	680 µF	82%	JSE0824S05
	12 V	665 mA		390 mA	330 µF	85%	JSE0824S12
	15 V	535 mA		395 mA	330 µF	85%	JSE0824S15
	24 V	335 mA		390 mA	150 µF	86%	JSE0824S24
	±12 V	±335 mA		395 mA	±150 µF	85%	JSE0824D12
	±15 V	±265 mA		385 mA	±150 µF	86%	JSE0824D15
36-75V	3V3	1600 mA	8 mA	140 mA	680 µF	78%	JSE0848S3V3
	5 V	1600 mA		205 mA	680 µF	81%	JSE0848S05
	12 V	665 mA		195 mA	330 µF	85%	JSE0848S12
	15 V	535 mA		195 mA	330 µF	85%	JSE0848S15
	24 V	335 mA		195 mA	150 µF	86%	JSE0848S24
	±12 V	±335 mA		195 mA	±150 µF	86%	JSE0848D12
	±15 V	±265 mA		195 mA	±150 µF	86%	JSE0848D15

Notes

1. Input currents measured at nominal input voltage.

2. Maximum capacitive load is per output.

Mechanical Details

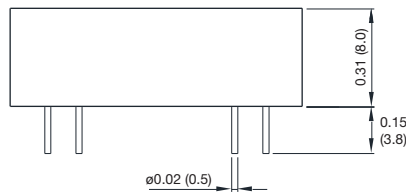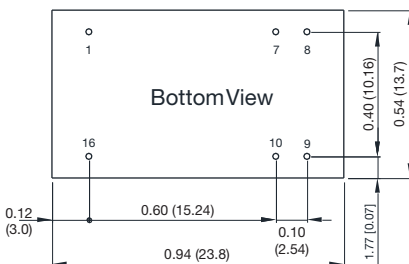

Pin Connections		
Pin	Single	Dual
1	-Vin	-Vin
7	No Connection	No Connection
8	No Connection	Common
9	+Vout	+Vout
10	-Vout	-Vout
16	+Vin	+Vin

Input

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Input Voltage Range	9.0		18	VDC	12 V nominal
	18.0		36	VDC	24 V nominal
	36.0		75	VDC	48 V nominal
Input Filter	Internal Pi type				
Undervoltage Lockout	ON at >9V, OFF at <8 V				12 V models
	ON at >18V, OFF at <16 V				24 V models
	ON at >36V, OFF at <34 V				48 V models
Input Surge			25	VDC for 1 s	12 V models
			50		24 V models
			100		48 V models

Output

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Output Voltage	3.3		30	VDC	See Models and Ratings table
Initial Set Accuracy			±2.0	%	At full load
Output Voltage Balance		±1.0	±2.0	%	For dual output with balanced loads
Minimum Load				A	No minimum load required
Line Regulation		±0.2	±0.8	%	From minimum to maximum input at full load
Load Regulation		±0.5	±1.0	%	From 0 to full load
Cross Regulation			±5.0	%	On dual output models when one load is varied between 25% and 100% and other is fixed at 100%
Transient Response		3	5	% deviation	Recovery within 1% in less than 250 µs for a 25% load change.
Ripple & Noise			55	mV pk-pk	20 MHz bandwidth. Measured using 0.47 µF ceramic capacitor.
Overload Protection			150	%	
Short Circuit Protection					Continuous Trip & Restart (Hiccup mode), with auto recovery
Maximum Capacitive Load					See Models and Ratings table
Temperature Coefficient			0.02	%/°C	

General

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Efficiency		85		%	See Models and Ratings table
Isolation: Input to Output	1500/1800			VDC	60 s/1 s
Isolation Resistance	10 ⁹			Ω	At 500 VDC
Isolation Capacitance		500		pF	
Switching Frequency		370		kHz	
Power Density			50.8	W/in ³	
Mean Time Between Failure		1		MHrs	MIL-HDBK-217F, +25 °C GB
Weight		0.013 (6.1)		lb (g)	

Environmental

Characteristic	Minimum	Typical	Maximum	Units	Notes & Conditions
Operating Temperature	-40		+105	°C	See Derating Curve.
Storage Temperature	-50		+125	°C	
Case Temperature			+105	°C	
Humidity			95	%RH	Non-condensing
Cooling					Natural convection
Case Flammability	UL 94V-0 Rated				

EMC: Emissions

Phenomenon	Standard	Test Level	Notes & Conditions
Conducted	EN55022	Class A	No filter required


EMC: Immunity

Phenomenon	Standard	Test Level	Criteria	Notes & Conditions
ESD	EN61000-4-2	±8 kV air discharge, ±6 kV contact	A	
Radiated	EN61000-4-3	10 V/m	A	
EFT/Burst	EN61000-4-4	±2 kV	A	With external capacitor, suggested part is CHEMI-CON KY 330µF/100V
Surge	EN61000-4-5	±1 kV	A	With external capacitor, suggested part is CHEMI-CON KY 330µF/100V
Conducted	EN61000-4-6	10 V rms	A	

Safety Approvals

Safety Agency	Safety Standard	Notes & Conditions
CB Report	IEC60950-1	Information Technology
UL	UL/cUL60950-1	Information Technology

Mechanical Details

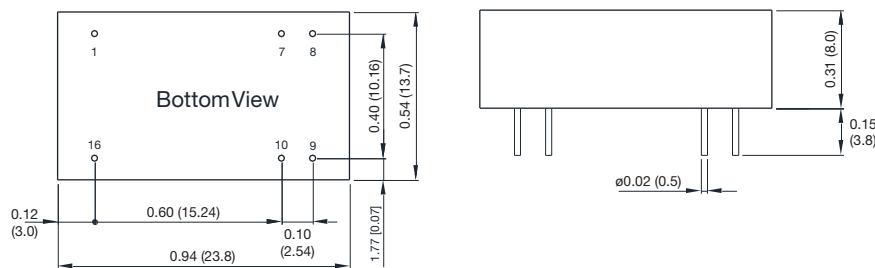

Pin Connections		
Pin	Single	Dual
1	-Vin	-Vin
7	No Connection	No Connection
8	No Connection	Common
9	+Vout	+Vout
10	-Vout	-Vout
16	+Vin	+Vin

Notes

- All dimensions are in inches (mm)
- Weight: 0.013 lbs (6.1 g) approx.
- Tolerance: X.XX±0.01 (X.X±0.25)
X.XXX±0.005 (X.XX±0.13)
- Pin Tolerance: ±0.002 (±0.05)

Application Notes

Derating Curve

