



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




## Triple Output Industrial Power Supplies

### Features

- ◆ 5 Year Warranty
- ◆ Power factor Corrected
- ◆ Approved to VDE0160 Machinery Directive
- ◆ Universal Input (85 - 265VAC)
- ◆ Level B EMI

### Key Market Segments & Applications

- ◆ Factory Automation Process Control, NC-Machining, Automotive, Packaging Equipment, Materials Handling, Chemical Processing, Robots
- ◆ Test & Measurement Burn-in & Test, Automated Test, Instrumentation, Measurement, Detection

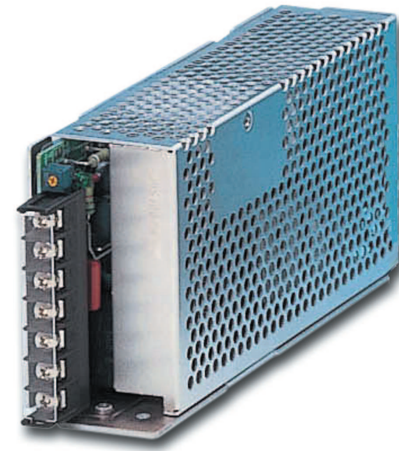

Not recommended for new designs - see HWS series

Specifications		JWT75	JWT100
Model		JWT75	JWT100
Max Output Power	W	75	100
Efficiency (Typ)	%	72	
Input Voltage range	-	85 - 265VAC (47 - 63Hz) or 120 - 330VDC	
Input Current Typ	A	1.2 / 0.6	1.4 / 0.7
Inrush Current	A	14A at 100VAC, 28A at 200VAC input	
Power Factor	-	Meets EN61000-3-2	
Output Voltage Accuracy	-	V1 variable, V2 & V3 +/-5%	
Temperature Coefficient	-	V1 & V2 <0.02%/°C, V3 <0.03%/°C	
Overcurrent Protection	-	>105%	
Overvoltage Protection	V	Main output only: 5.7 - 7V	
Hold Up Time (Typ)	ms	20	
Leakage Current	-	0.75mA Max, 0.44mA typical at 230VAC	
Operating Temperature	-	-10°C to +65°C, derate linearly to 50% load from 50°C to 65°C -10°C to +50°C, derate linearly to 60% load from 40°C to 50°C with cover	
Storage Temperature	-	-30 to +85°C	
Humidity	-	30 - 90% RH (operating), 10 - 95% RH (non operating)	
Cooling	-	Convection	
Withstand Voltage	-	Input to Ground 2kVAC (20mA), Input to Output 3kVAC (20mA), Output to Ground 500VAC (100mA) for 1 min.	
Isolation Resistance	-	>100M at 25°C & 70%RH, Output to Ground 500VDC	
Vibration (non operating)	-	10 - 55Hz (1 minute sweep), 2G constant X, Y, Z 1 hour	
Shock	-	<20G	
Safety Agency Approvals	-	UL60950-1, CSA60950-1, EN60950-1, VDE0160, CE Mark, Built to meet DENTORI	
Conducted & Radiated EMI	-	EN55011 / EN55022-B, FCC Class B, VCCI-B	
Recommended EMI Filter	-	RSEL-2002W	
Weight (Typ)	g	600	720
Size (WxHxD)	mm	42 x 92 x 188	48 x 92 x 203
Warranty	-	Five Years	


Model Selector								
Model	Output	Voltage	Adjust. Range	Min Current (A)	Max Current (A)	Load Reg (mV)	Line Reg (mV)	Ripple Noise (mV)
JWT75-522/A	V1	+5V	5 - 5.25	0.8	8	40	20	120
	V2	+12V	-	0	4	100	48	150
	V3	-12V	-	0	0.5	150	48	150
JWT75-5FF/A	V1	+5V	5 - 5.25	0.8	8	40	20	120
	V2	+15V	-	0	3.2	120	60	150
	V3	-15V	-	0	0.5	150	60	150
JWT75-525/A	V1	+5V	5 - 5.25	0.8	8	40	20	120
	V2	+12V	-	0	4	100	48	150
	V3	-5V	-	0	0.5	100	20	150
JWT100-522/A	V1	+5V	5 - 5.25	1.3	13	40	20	120
	V2	+12V	-	0	5.5	100	48	150
	V3	-12V	-	0	1	150	48	150
JWT100-5FF/A	V1	+5V	5 - 5.25	1.3	13	40	20	120
	V2	+15V	-	0	4.5	120	60	150
	V3	-15V	-	0	1	150	60	150
JWT100-525/A	V1	+5V	5 - 5.25	1.3	13	40	20	120
	V2	+12V	-	0	5.5	100	48	150
	V3	-5V	-	0	1	100	20	150

Dimensions Table			
	Height (H)	Width (W)	Depth (D)
JWT75	1.65	3.62	7.40
JWT100	1.89	3.62	7.99

Options	
Suffix	Description
Blank	Screw terminals, no cover
/A	Screw terminals, cover (Standard US stock item)
/B	Molex terminals, no cover
/C	Molex terminals, cover
/R	Remote On / Off
Example	JWT75-525/RC

Other Industrial Products	
HWS	15 to 1500W Single output
JWS, JWS-P	50W to 600W Single output
DLP/DSP/DPP	10 to 480W DIN Rail Single Output
NV175	175W Triple & Quad 3" x 5"

For Additional Information, please visit [us.tdk-lambda.com/lp/products/jws-series.htm](http://us.tdk-lambda.com/lp/products/jws-series.htm)

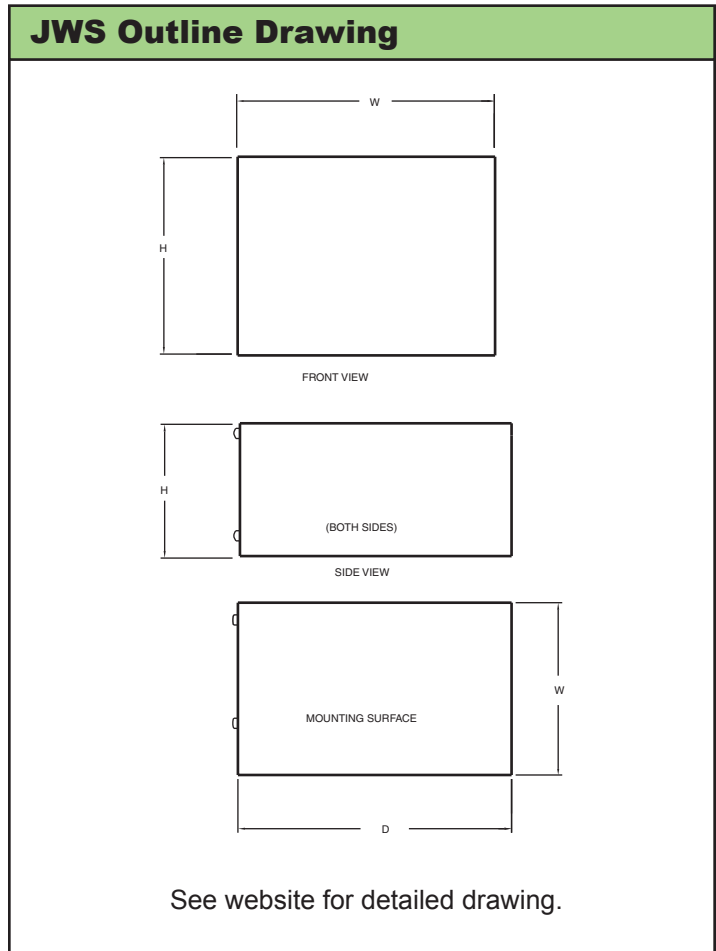

**Not recommended for new designs - see HWS series**