imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





Is Now Part of



ON Semiconductor®

To learn more about ON Semiconductor, please visit our website at <u>www.onsemi.com</u>

Please note: As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (_), the underscore (_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at www.onsemi.com. Please email any questions regarding the system integration to Fairchild_questions@onsemi.com.

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized applications, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an equif prese






KA4558 Dual Operational Amplifier

Features


- No frequency compensation required.
- No latch up.
- Large common mode and differential voltage range.
- Parameter tracking over temperature range.
- Gain and phase match between amplifiers.
- Internally frequency compensated.
- Low noise input transistors.


Descriptions

The KA4558 is a monolithic integrated circuit designed for dual operational amplifier.




Internal Block Diagram





Schematic Diagram

(One Section Only)

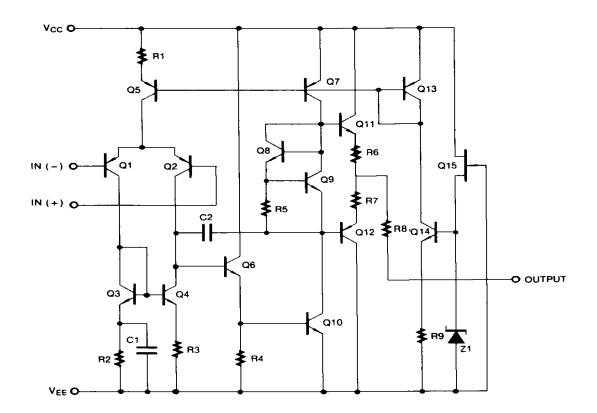

Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
Supply Voltage	Vcc	±22	V
Differential Input Voltage	VI(DIFF)	30	V
Input Voltage	VI	±15	V
Power Dissipation	PD	400	mW
Operating Temperature Range KA4558 KA4558I	Topr	0 ~ 70 -40 ~ 85	°C
Storage Temperature Range	TSTG	-65 ~ 150	°C

Electrical Characteristics

(VCC = 15V, VEE = - 15V , TA = 25 °C unless otherwise specified)

Devenenter	O maked	Conditions		KA4558/KA4558I			
Parameter	Symbol			Min	Тур	Max	Unit
Input Offset Voltage	Mic	Rs≤10KΩ		-	2	6	
	VIO		Note 1	-	-	7.5	mV
Input Offset Current				-	5	200	
	lio		TA=TA(MAX)	-	-	300	nA
			TA =TA(MIN)	-	-	300	
Input Bias Current			ł		30	500	nA
	IBIAS	TA=TA(MAX)		-	-	800	
			TA =TA(MIN)	-	-	800	1
Large Signal		VO(P-P)= ±1	0V,RL≤2KΩ	20	200	-	V/mV
Voltage Gain	Gv		Note 1	-	-	-	V/mV
Common Mode Input Voltage Range	Vuo			±12	±13	-	v
	VI(R)		Note 1	-	-	-	
Common Mode Rejection Ratio	CMRR	Rs≤10KΩ		70	90	-	dB
	Civinn		Note 1	-	-	-	
Supply Voltage Rejection Ratio	PSRR	Rs≤10KΩ		76	90	-	dB
	FONN		Note 1	76	90	-	
Output Voltage Swing	VO(P-P)	RL≥10KΩ	- Note1	±12	±14	-	V
	VO(P-P)	RL≥2KΩ	NOLET	±10	±13	-	
Supply Current (Both Amplifiers)				-	3.5	5.8	mA
	Icc		TA =TA(MAX)	-	-	5.0	
			TA =TA(MIN)	-	-	6.7	
Power Consumption (Both Amplifiers)				-	70	170	
	PC	$T_{a} = T_{A}(MAX)$ $T_{a} = T_{A}(MIN)$		-	-	150	mW
				-	-	200	
Slew Rate (Note2)	SR	VI =10V, RL≥2KΩ CI≤100pF		1.2	-	-	V/µs
Rise Time (Note2)	TR	VI =20mV, RL≥2KΩ CI≤100pF		-	0.3	-	μs
Overshoot (Note2)	OS	VI =20mV, RL≥2KΩ CI≤100pF		-	15	-	%

Note :

 $1. \text{ KA4558}: \text{T}_{A}(\text{MIN}) \leq \text{T}_{A} \leq \text{T}_{A}(\text{MAX}) = 0 \leq \text{T}_{A} \leq 70 \ ^{\circ}\text{C} \ , \ \text{KA4558I}: \text{T}_{A}(\text{MIN}) \leq \text{T}_{A} \leq \text{T}_{A}(\text{MAX}) = -40 \leq \text{T}_{A} \leq +85 \ ^{\circ}\text{C} \ \text{C} \ \text{C} \ , \ \text{C} = -40 \leq \text{T}_{A} \leq +85 \ ^{\circ}\text{C} \ \text{C} \$

2. Guaranteed by design.






Figure 1. Burst Noise vs Source Resistance




Figure 3. Output Noise vs Source Resistance




Figure 5. Open Loop Frequency Response




Figure 2. RMS Noise vs Source Resistance




Figure 4. Spectral Noise Density




Figure 6. Phase Margin vs Frequency

Typical Performance Characteristics (continued)




Figure 7. Positive Output Voltage Swing vs Load Resistance




Figure 9. Power Bandwidth (Large Signal Output Swing vs Frequency)





Figure 8. Negative Output Voltage Swing vs Load Resistance

Mechanical Dimensions


Package

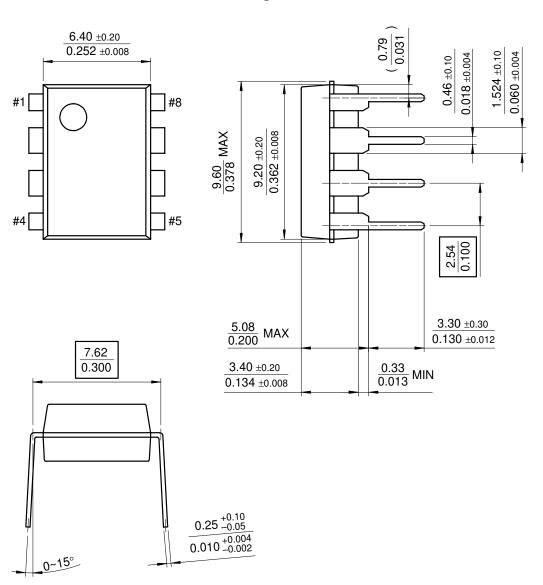

8-DIP

Mechanical Dimensions (Continued)

Package

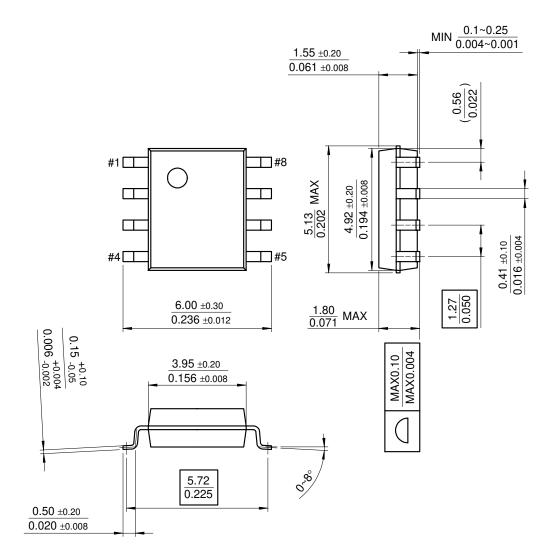


8-SOP






#1

KA4558

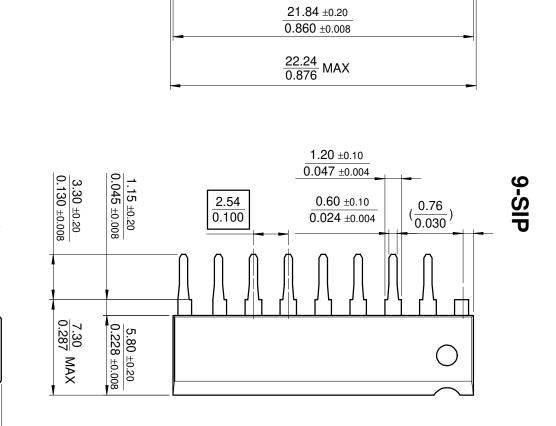

8#



Ordering Information

Product Number	Package	Operating Temperature
KA4558	8-DIP	
KA4558D	8-SOP	0 ~ + 70°C
KA4558S	9-SIP	
KA4558I	8-DIP	-40 ~ + 85°C

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
- A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

www.fairchildsemi.com

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <u>www.onsemi.com/site/pdf/Patent-Marking.pdf</u>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor has against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death ass

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800–282–9855 Toll Free USA/Canada Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910

Japan Customer Focus Center Phone: 81-3-5817-1050 ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative

© Semiconductor Components Industries, LLC