

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

KAC 600V 1-1000A



For new installations, Bussmann recommends the 700 volt FWP series fuse. The 600V fuses are supplied as replacements only.

Type	Ordering Information			Dimensions	
	Part Number		Carton Qty.	Carton Weight (lbs)	Figure Number
KAC 600V	KAC-1	KAC-7	KAC-17.5	10	Fig. 1
	KAC-2	KAC-8	KAC-20		
	KAC-3	KAC-9	KAC-25	10	Fig. 1
	KAC-4	KAC-10	KAC-30		
	KAC-5	KAC-12		10	Fig. 1
	KAC-6	KAC-15			
	KAC-35	KAC-45	KAC-60	5	Fig. 2
	KAC-40	KAC-50			
	KAC-70	KAC-90		1	Fig. 2
	KAC-80	KAC-100			
	KAC-110	KAC-150	KAC-200	1	Fig. 1
	KAC-125	KAC-175			
	KAC-225	KAC-300	KAC-400	1	Fig. 1
	KAC-250	KAC-350			
	KAC-450	KAC-600	KAC-800	1	Fig. 1
	KAC-500	KAC-700			
	KAC-1000			1	Fig. 1

†U.L. Recognition on 1 through 600 amperes only. 1 kg = 2.2 lbs 1 lb = 0.45 kg

- Interrupting rating 200kA RMS Symmetrical.
- Consult Bussmann for DC ratings.

Dimensions

Fig. 1: 1-30 & 450-1000 Amp Range


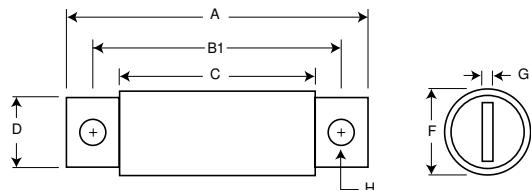


Fig. 2: 35-400 Amp Range

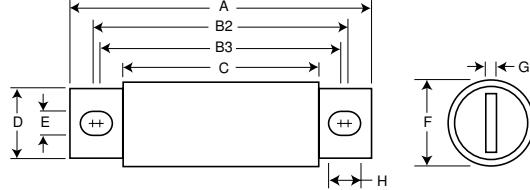

Order #	Fig.	A	B1	B2	B3	C	D	E	F	G	H
KAC-1-30	1	2.875	2.500	—	—	1.875	0.406	—	0.563	0.063	0.257
KAC-35-60	2	4.375	—	3.750	3.500	2.750	0.625	0.343	0.813	0.094	0.468
KAC-70-100	2	5.000	—	4.063	3.656	2.750	0.750	0.406	1.000	0.125	0.609
KAC-110-200	2	5.140	—	4.390	3.766	2.906	1.000	0.406	1.500	0.188	0.718
KAC-225-400	2	6.182	—	4.815	4.565	3.000	1.625	0.562	2.000	0.250	0.687
KAC-450-800	1	6.250	4.750	—	—	3.063	2.000	—	2.500	0.250	0.563
KAC-1000	1	7.250	4.750	—	—	3.063	2.750	—	3.500	0.375	0.563

Dimension in inches.

1mm = 0.0394" 1" = 25.4mm

The only controlled copy of this BIF document is the electronic read-only version located on the Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.