# imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





Is Now Part of



## **ON Semiconductor**®

To learn more about ON Semiconductor, please visit our website at <u>www.onsemi.com</u>

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor dates sheds, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor dates sheds and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights of others. ON Semiconductor products are not designed, intended, or authorized for use on similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor and its officers, employees, subsidiaries, affliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out or i, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconduc



### KSA1156

#### High Voltage Switching Low Power Switching Regulator DC-DC Converter

- High Breakdown Voltage
- Low Collector Saturation Voltage
- High Speed Switching



#### **PNP Silicon Transistor**

Absolute Maximum Ratings  $T_{C}=25^{\circ}C$  unless otherwise noted

Symbol	Parameter	Ratings	Units
V <sub>CBO</sub>	Collector-Base Voltage	- 400	V
V <sub>CEO</sub>	Collector-Emitter Voltage	- 400	V
V <sub>EBO</sub>	Emitter-Base Voltage	- 7	V
I <sub>B</sub>	Base Current	- 0.25	А
I <sub>C</sub>	Collector Current (DC)	- 0.5	А
I <sub>CP</sub>	Collector Current (Pulse)	- 1	А
P <sub>C</sub>	Collector Dissipation (T <sub>a</sub> =25°C)	1	W
P <sub>C</sub>	Collector Dissipation (T <sub>C</sub> =25°C)	10	W
TJ	Junction Temperature	150	°C
T <sub>STG</sub>	Storage Temperature	- 55 ~ 150	°C

### **Electrical Characteristics** $T_C=25^{\circ}C$ unless otherwise noted


Symbol	Parameter	Test Condition	Min.	Max.	Units
$V_{\text{CEO}}(\text{sus})$	Collector-Emitter Sustaining Voltage	I <sub>C</sub> = - 100mA, I <sub>B</sub> = - 10mA L = - 20mH	- 400		V
V <sub>CEX</sub> (sus)	Collector-Emitter Sustaining Voltage	$I_{C} = -200$ mA, $I_{B1} = -I_{B2} = -20$ mA $V_{BE}(off) = 5$ V, L = 10mH	- 400		V
I <sub>CBO</sub>	Collector Cut-off Current	$V_{CB} = -400V, I_E = 0$		- 100	μΑ
I <sub>EBO</sub>	Emitter Cut-off Current	$V_{EB} = -5V, I_{C} = 0$		- 10	μΑ
I <sub>CEX1</sub>	Collector Cut-off Current	$V_{CE} = -400V, V_{BE}(off) = 1.5V$		- 100	μΑ
I <sub>CEX2</sub>	Collector Cut-off Current	$V_{CE} = -400V, V_{BE}(off) = 1.5V$ T <sub>C</sub> = 125°C		- 1	mA
h <sub>FE</sub>	DC Current Gain	V <sub>CE</sub> = - 5V, I <sub>C</sub> = - 100mA	30	200	
V <sub>CE</sub> (sat)	Collector-Emitter Saturation Voltage	I <sub>C</sub> = - 100mA, I <sub>B</sub> = - 10mA		- 1	V
V <sub>BE</sub> (sat)	Base-Emitter Saturation Voltage	I <sub>C</sub> = - 100mA, I <sub>B</sub> = - 10mA		- 1.2	V
t <sub>ON</sub>	Turn On Time	V <sub>CC</sub> = - 150V, I <sub>C</sub> = - 100mA		1	μs
t <sub>STG</sub>	Storage Time	$I_{B1} = -10 \text{mA}$ , $I_{B2} = 20 \text{mA}$		4	μs
t <sub>F</sub>	Fall Time	$R_{L} = 1.5 K\Omega$		1	μs

#### h<sub>FE</sub> Classification


Classification	N	R	0	Y
h <sub>FE</sub>	30 ~ 60	40 ~ 80	60 ~ 120	100 ~ 200

©2000 Fairchild Semiconductor International


KSA1156

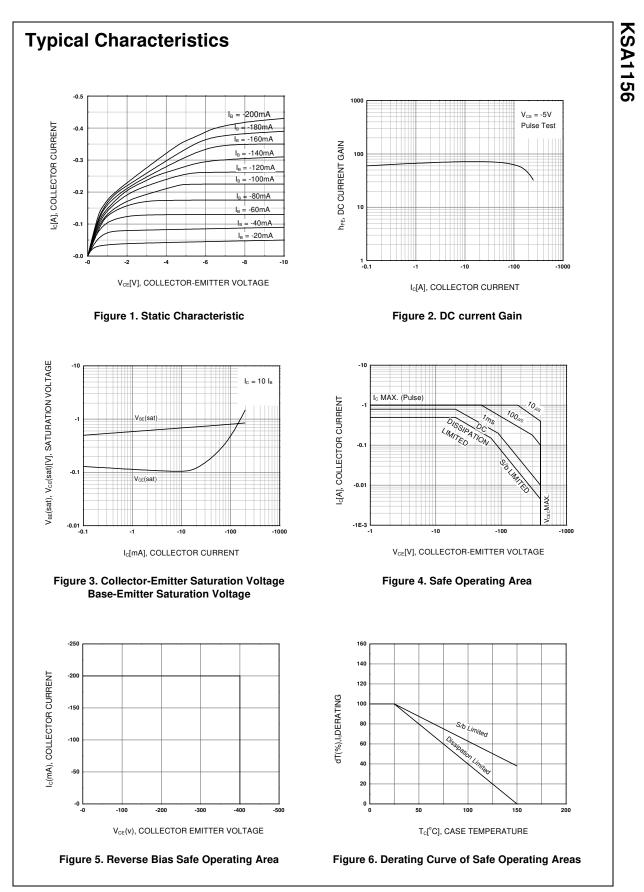

©2000 Fairchild Semiconductor International

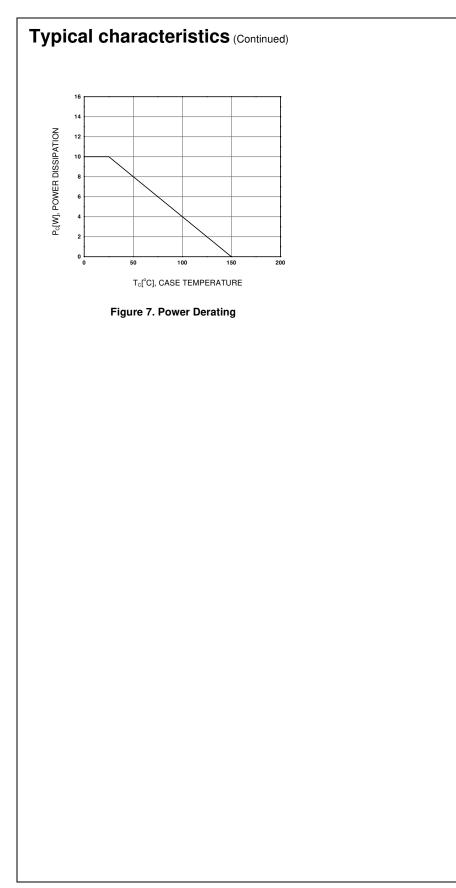



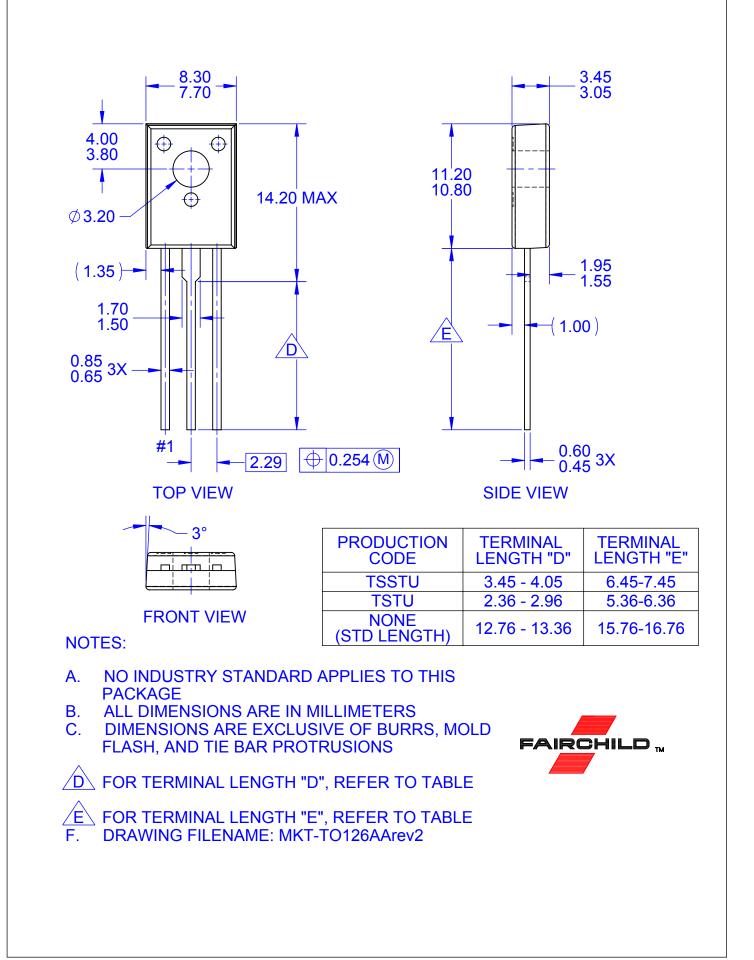

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <u>www.onsemi.com/site/pdf/Patent-Marking.pdf</u>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor has against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death ass

#### PUBLICATION ORDERING INFORMATION

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800–282–9855 Toll Free USA/Canada Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910

Japan Customer Focus Center Phone: 81-3-5817-1050 ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative

© Semiconductor Components Industries, LLC