



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




# KSD1589

KSD1589

## Low Frequency Power Amplifier Low Speed Switching Industrial Use

- Complement to KSB1098




## NPN Silicon Darlington Transistor

### Absolute Maximum Ratings $T_C=25^\circ\text{C}$ unless otherwise noted

| Symbol    | Parameter  | Value      | Units            |
|-----------|--|------------|------------------|
| $V_{CBO}$ | Collector-Base Voltage                           | 150        | V                |
| $V_{CEO}$ | Collector-Emitter Voltage                        | 100        | V                |
| $V_{EBO}$ | Emitter-Base Voltage                             | 7          | V                |
| $I_C$     | Collector Current (DC)                           | 5          | A                |
| $I_{CP}$  | *Collector Current (Pulse)                       | 8          | A                |
| $I_B$     | Base Current                                     | 0.5        | A                |
| $P_C$     | Collector Dissipation ( $T_a=25^\circ\text{C}$ ) | 1.5        | W                |
|           | Collector Dissipation ( $T_C=25^\circ\text{C}$ ) | 20         | W                |
| $T_J$     | Junction Temperature                             | 150        | $^\circ\text{C}$ |
| $T_{STG}$ | Storage Temperature                              | - 55 ~ 150 | $^\circ\text{C}$ |

\*  $PW \leq 10\text{ms}$ , Duty Cycles  $\leq 50\%$



### Electrical Characteristics $T_C=25^\circ\text{C}$ unless otherwise noted

| Symbol                 | Parameter                             | Test Condition  | Min.      | Typ. | Max. | Units         |
|------------------------|---------------------------------------|---|-----------|------|------|---------------|
| $I_{CBO}$              | Collector Cut-off Current             | $V_{CB} = 100\text{V}$ , $I_E = 0$  |           |      | 1    | $\mu\text{A}$ |
| $h_{FE1}$<br>$h_{FE2}$ | *DC Current Gain                      | $V_{CE} = 2\text{V}$ , $I_C = 3\text{A}$<br>$V_{CE} = 2\text{V}$ , $I_C = 5\text{A}$                | 2K<br>500 | 6K   | 15K  |               |
| $V_{CE(sat)}$          | *Collector-Emitter Saturation Voltage | $I_C = 3\text{A}$ , $I_B = 3\text{mA}$  |           | 0.9  | 1.5  | V             |
| $V_{BE(sat)}$          | Base-Emitter Saturation Voltage       | $I_C = 3\text{A}$ , $I_B = 3\text{mA}$  |           | 1.6  | 2    | V             |
| $t_{ON}$               | Turn On Time                          | $V_{CC} = 50\text{V}$ , $I_C = 3\text{A}$<br>$I_{B1} = - I_{B2} = 3\text{mA}$<br>$R_L = 16.7\Omega$ |           | 1    |      | $\mu\text{s}$ |
| $t_{stg}$              | Storage Time                          |   |           | 3.5  |      | $\mu\text{s}$ |
| $t_f$                  | Fall Time                             |   |           | 1.2  |      | $\mu\text{s}$ |

\* Pulse Test:  $PW \leq 350\mu\text{s}$ , Duty Cycle  $\leq 2\%$  Pulsed

### $h_{FE}$ Classification

| Classification | R           | O           | Y            |
|----------------|-------------|-------------|--------------|
| $h_{FE1}$      | 2000 ~ 5000 | 3000 ~ 7000 | 5000 ~ 15000 |

# Typical Characteristics

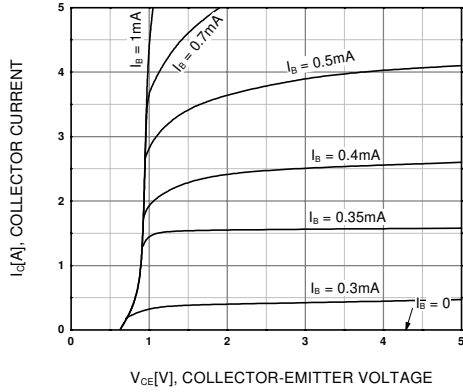


Figure 1. Static Characteristic

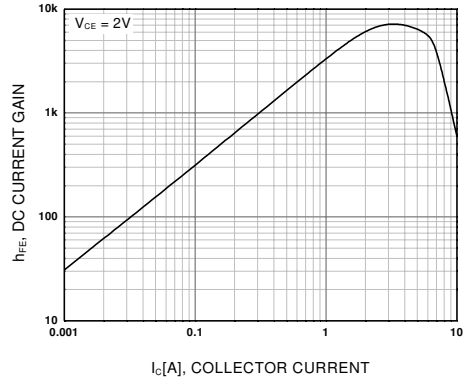


Figure 2. DC current Gain

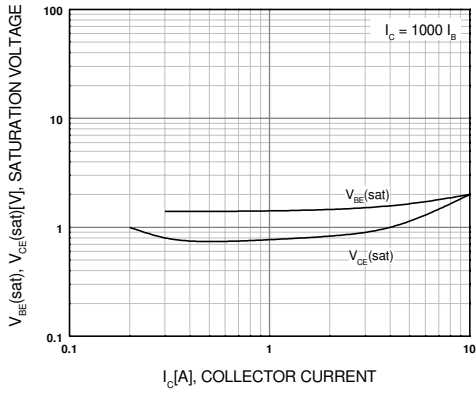


Figure 3. Base-Emitter Saturation Voltage  
Collector-Emitter Saturation Voltage

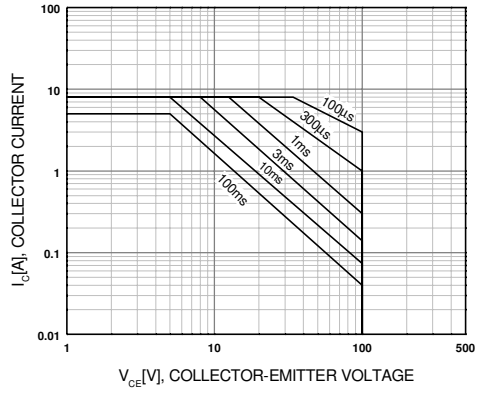


Figure 4. Safe Operating Area


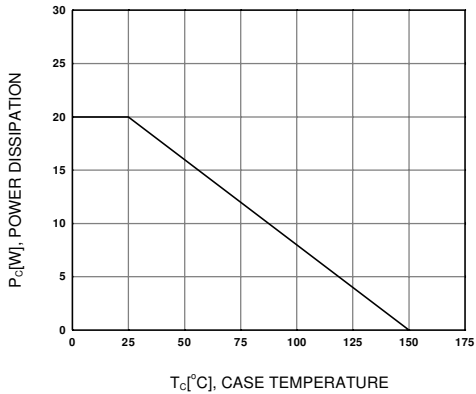


Figure 5. Power Derating

# Package Dimensions

KSD1589

## TO-220F

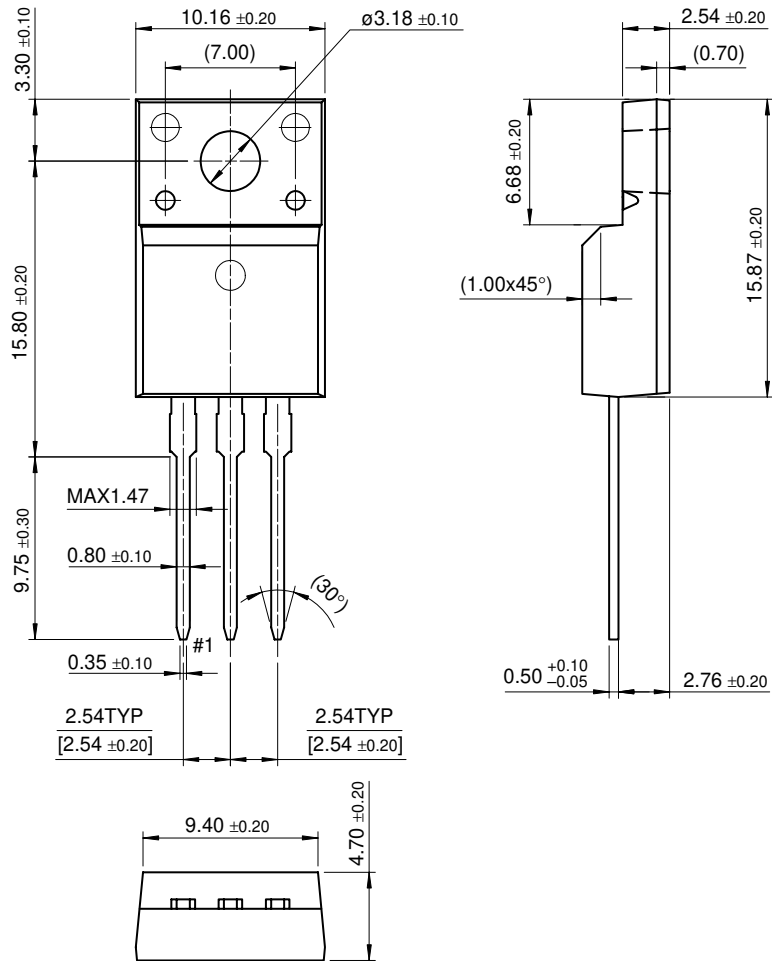

Dimensions in Millimeters

## TRADEMARKS

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

|   |                                  |                            |                                  |                              |
|---|----------------------------------|----------------------------|----------------------------------|------------------------------|
| ACE <sup>x</sup> <sup>TM</sup>                    | FACT Quiet Series <sup>TM</sup>  | LittleFET <sup>TM</sup>    | Power247 <sup>TM</sup>           | SuperSOT <sup>TM</sup> -6    |
| ActiveArray <sup>TM</sup>                         | FAST <sup>®</sup>                | MICROCOUPLER <sup>TM</sup> | PowerTrench <sup>®</sup>         | SuperSOT <sup>TM</sup> -8    |
| Bottomless <sup>TM</sup>                          | FAST <sup>r</sup> <sup>TM</sup>  | MicroFET <sup>TM</sup>     | QFET <sup>®</sup>                | SyncFET <sup>TM</sup>        |
| CoolFET <sup>TM</sup>                             | FRFET <sup>TM</sup>              | MicroPak <sup>TM</sup>     | QS <sup>TM</sup>                 | TinyLogic <sup>®</sup>       |
| CROSSVOL <sup>TM</sup>                            | GlobalOptoisolator <sup>TM</sup> | MICROWIRE <sup>TM</sup>    | QT Optoelectronics <sup>TM</sup> | TINYOPTO <sup>TM</sup>       |
| DOME <sup>TM</sup>                                | GTO <sup>TM</sup>                | MSX <sup>TM</sup>          | Quiet Series <sup>TM</sup>       | TruTranslation <sup>TM</sup> |
| EcoSPARK <sup>TM</sup>                            | HiSeC <sup>TM</sup>              | MSXPro <sup>TM</sup>       | RapidConfigure <sup>TM</sup>     | UHC <sup>TM</sup>            |
| E <sup>2</sup> CMOS <sup>TM</sup>                 | I <sup>2</sup> C <sup>TM</sup>   | OCX <sup>TM</sup>          | RapidConnect <sup>TM</sup>       | UltraFET <sup>®</sup>        |
| EnSigna <sup>TM</sup>                             | ImpliedDisconnect <sup>TM</sup>  | OCXPro <sup>TM</sup>       | SILENT SWITCHER <sup>®</sup>     | VCX <sup>TM</sup>            |
| FACT <sup>TM</sup>                                | ISOPLANAR <sup>TM</sup>          | OPTOLOGIC <sup>®</sup>     | SMART START <sup>TM</sup>        |                              |
| Across the board. Around the world. <sup>TM</sup> |                                  | OPTOPLANAR <sup>TM</sup>   | SPM <sup>TM</sup>                |                              |
| The Power Franchise <sup>TM</sup>                 |                                  | PACMAN <sup>TM</sup>       | Stealth <sup>TM</sup>            |                              |
| Programmable Active Droop <sup>TM</sup>           |                                  | POP <sup>TM</sup>          | SuperSOT <sup>TM</sup> -3        |                              |

## DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

## LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.
- A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

## PRODUCT STATUS DEFINITIONS

### Definition of Terms

| Datasheet Identification | Product Status         | Definition  |
|--------------------------|------------------------|---|
| Advance Information      | Formative or In Design | This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.  |
| Preliminary              | First Production       | This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design. |
| No Identification Needed | Full Production        | This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.   |
| Obsolete                 | Not In Production      | This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.   |