



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



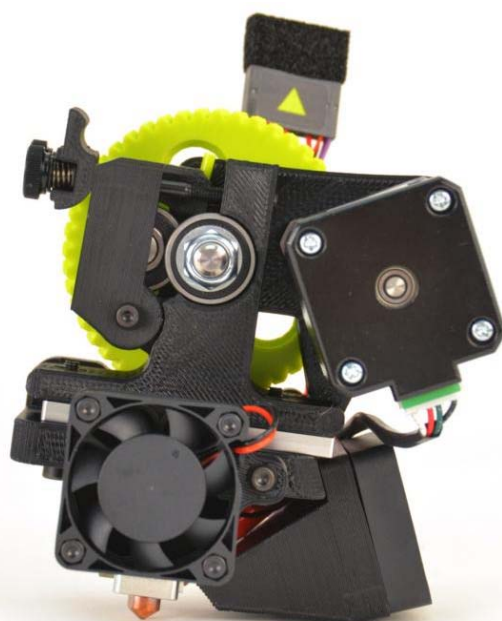

Suited for Intermediate Users

LulzBot Mini Single Extruder Tool Head v2.1

This replacement standard tool head for the LulzBot Mini 3D printer features improved cooling through the larger heat sink fan and a redesigned extruder idler made to be stronger and more reliable. We use the popular Wade's Accessible Reloaded extruder and feature the LulzBot v2 all-metal hot end (capable of temperatures up to 300°C) mounted on our LulzBot Mini Extruder Mount. This tool head ships assembled, aligned, and with all the connections terminated for ease of installation onto the LulzBot Mini.

Works with: LulzBot Mini

Features

Updates include the Beefy Extruder Idler, designed for strength and reliability, an updated larger heat sync cooling fan, and Moons stepper motors with modular connector plugs, all used on the latest generation of LulzBot Mini 3D printers.

Parts & Specifications

Parts Included

LulzBot v2 All Metal Hot End

Wade's Accessible Extruder

LulzBot Mini Extruder Mount

Tools Required

2.5mm Hex Key

4mm Hex Key

Optional Printable Upgrade

X-Axis Carriage Cap with Integrated Wire Management

Specifications

Recommended filament diameter: 3mm

Hot end temperature range: 120°C - 300°C

Nozzle diameter: 0.5mm

Fans: Heat sink and nozzle fans included

Weight: 0.73 kg (1.6 lbs)