



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



USB ADAPTER

10 WATT, Universal Input Wall-mount Adapter

CEC LEVEL V



FEATURES

- ✔ **5V USB OUTPUT**
- ✔ **CEC LEVEL V**
- ✔ **10 WATT OUTPUT POWER**
- ✔ **UNIVERSAL INPUT**
- ✔ **OVERCURRENT PROTECTION**
- ✔ **SHORT CIRCUIT PROTECTION**
- ✔ **INPUT PROTECTION**
- ✔ **RoHS COMPLIANT**

SAFETIES/APPROVALS

UL-60950-1 2ND EDITION 2007-3-27

CSA C22.2 NO.60950-1-07 2ND EDITION

ELECTRICAL SPECIFICATIONS

All specifications are typical at nominal input, full load

INPUT SPECIFICATIONS

Input Voltage.....100 ~ 240VAC
Input Frequency.....47 ~ 63Hz
Input Current.....0.4A Max.
Inrush Current.....40A Max

OUTPUT SPECIFICATIONS

Output Voltage5V
Minimum Load.....None
Efficiency73.36%
Short Circuit Protection2A Inner Current Fuse
Over-Current ProtectionAutomatic Recovery
Ripple and Noise.100mVp-p max.
Turn OnTime.....20~30mS nom
Line Regulation.....2% Max
Output Regulation.....4.7 -5.4V

GENERAL SPECIFICATIONS

Insulation Resistance
Primary to Secondary.....50M
CEC.....Level V
Input Power Consumption(no load)0.3W Max


ENVIRONMENTAL SPECIFICATIONS

Operating Temperature10°C ~ +40°C
Cooling.....Convection
Temperature Coefficient0.05% / °C
Humidity.....5 ~ 95%Rh (non-condensing)
Storage Temperature.....-20°C ~ +80°C

PHYSICAL SPECIFICATIONS

46mm x 52mm x 28.9mm

MODEL	Output Voltage	Output Current (100 ~ 240 VAC)	Efficiency (%)
KUSB1052	5VDC	2.0A	73.36%

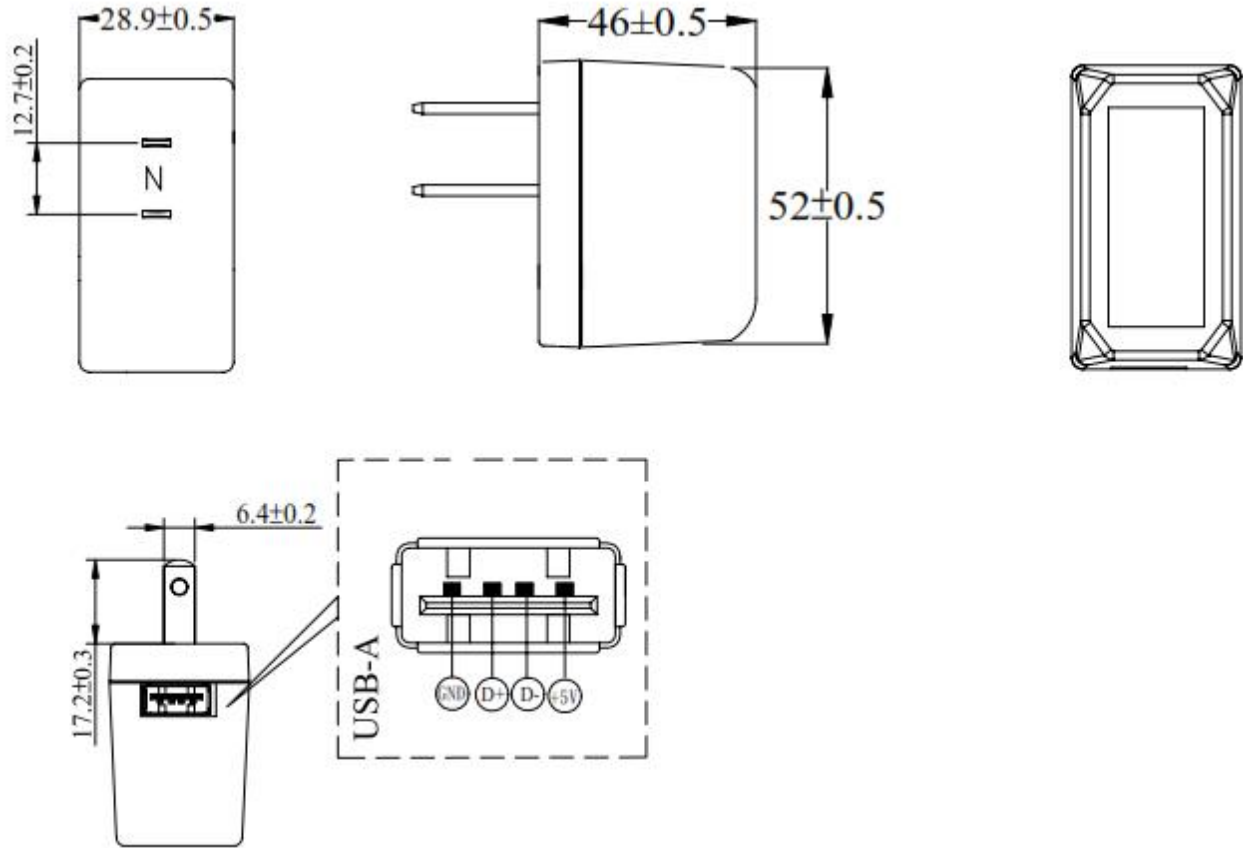

Note:

- Measurements in millimeter (mm) unless otherwise specified

NOTE:

Avoid sustained operation in overload or dead short conditions.
Specifications subject to changes without notice.