

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







Series KU

Base Mount Double Row Terminal Blocks

SPECIFICATIONS

Rating: 60A, 600V*

Center Spacing: .625" (15.88 mm)

Number of poles: 2 - 12 Wire Size: AWG #6 CU max.

Screw Size: #10-32 brass nickel plated

Torque Rating: 20 in/lb max.

Distance Between Barriers: .437" (11.09 mm) **Mounting**: Base mount. For 35mm DIN rail

mountable, consult factory.

Material: Molded base: Black, UL rated 94V-0 thermoplastic. Terminal plating: Nickel over brass.

Screws: Nickel plated brass.

Operating Temperature: 105°C max.


Approvals: UL E62622; CSA LR15364; CE Pending


No. of	A	(U	KUX only
Poles		B	A
2 3 4 5 6 7 8 9	2.50 3.12 3.75 4.37 5.00 5.62 6.25 6.87 7.50	1.62 2.25 2.87 3.50 4.12 4.75 5.37 6.00 6.62	2.00 2.62 3.25 3.87 4.50 5.12 5.75 6.37 7.00
7	5.62	4.75	5.12
8	6.25	5.37	5.75
9	6.87	6.00	6.37

Dimensions in inches. To convert to millimeters, multiply by 25.4.

*60A rating achieved with #6 copper wire crimped to ring terminal



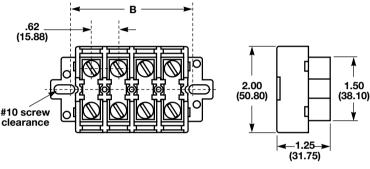



Part Numbering System

Poles

Series

KU ____

KU - Standard block 2 to 12

KUX - Short block

KUSC - Standard w/shorting strap & 4 shorting screws KURL - Standard w/removable link KUXSC - Short block w/shorting strap

& 4 shorting screws **KUXRL** - Short block w/removable link

Screw Options



oo - screws shipped bulkw - brass washer head,

nickel plated

P - Steel screw w/pressure plate
zinc plated

B - brass washer head, no plating

Covers



WC - Top cover & 2 end plates

Marking Strip



MT - Matte finish

NU - Numbered 1 to 12, horizontal

NUV - Numbered 1 to 12, vertical

PT - Marker strip for cover

Accessories



MTMU## Molded Marking Tape Matte Finish



NUM## Molded Marking Tape



JU12 Jumper 12 Circuits



NUE End Piece for NUC



NUC## Cover