



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



RF CERAMIC CHIP INDUCTORS



High frequency multi-layer chip inductors feature a monolithic body made of low loss ceramic and high conductivity metal electrodes to achieve optimal high frequency performance.

These RF chip inductors are compact in size and feature lead-free tin plated nickel barrier terminations and tape and reel packaging which makes them ideal for small size/high volume wireless applications.

APPLICATIONS & FEATURES


- CELL/PCS Modules
- Broadband Components
- RF Tranceivers
- RoHS Compliant (Standard, "V" Code)
- Sn/Pb Terminations Optional ("T" Code)
- Wireless LAN
- RFID
- 01005 Mini. Size Available

PRODUCT RANGE SUMMARY

EIA SIZE (mm)	SIZE CODE	L RANGE	Q FACTOR (Min.)	SRF (Typ.)	TEMPERATURE
01005 (0402)	L-03	0.8 - 3.9 nH	2 (100 MHz)	>21 GHz (1.0 nH)	-40°C to + 100°C
0201 (0603)	L-05	0.6 - 39 nH	4 (100 MHz)	>21 GHz (1.0 nH)	-40°C to + 100°C
0402 (1005)	L-07	1.0 - 120 nH	8 (100 MHz)	>21 GHz (1.0 nH)	-40°C to + 100°C
0603 (1608)	L-14	1.0 - 220 nH	12 (100 MHz)	>23 GHz (1.0 nH)	-40°C to + 100°C
0805 (2012)	L-15	1.5 - 680 nH	8 (100 MHz)	>21 GHz (1.5 nH)	-40°C to + 100°C

MECHANICAL CHARACTERISTICS

	01005 (0402)		0201 (0603)		0402 (1005)		0603 (1608)		0805 (2012)	
	Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
Length	.016 ±.001"	(0.4 ± 0.03)	.024 ±.001"	(0.6 ± 0.03)	.039 ±.004"	(1.00 ±.10)	.063 ±.006"	(1.60 ±.15)	.079 ±.008"	(2.00 ±.20)
Width	.008 ±.001"	(0.2 ± 0.03)	.012 ±.001"	(0.3 ± 0.03)	.020 ±.004"	(0.50 ±.10)	.031 ±.006"	(0.80 ±.15)	.047 ±.008"	(1.20 ±.20)
Thickness	.008 ±.001"	(0.2 ± 0.03)	.012 ±.001"	(0.3 ± 0.03)	.020 ±.004"	(0.50 ±.10)	.031 ±.006"	(0.80 ±.15)	.033 ±.008"	(0.85 ±.20)
End Band	.004 ±.002"	(0.1 ± 0.05)	.006 ±.002"	(0.15 ± 0.05)	.009 ±.004"	(0.23 ±.10)	.012 ±.008"	(0.30 ±.20)	.020 ±.012"	(0.50 ±.30)



HOW TO ORDER

L-	07	C	10N	J	V	6	T
DEVICE	SIZE	TYPE	VALUE	TOLERANCE	TERMINATION	MARKING	TAPE & REEL
Inductor	05 = 0201 07 = 0402 14 = 0603 15 = 0805	Ceramic	See Table	C = ± 0.2 nH ≤ 1.0 nH S = ± 0.3 nH 1.0 to 5.6 nH J = ± 5% 6.8 nH and above K = ± 10% 3.3 nH and above	V = Ni/Sn T = Ni / SnPb	4 = No Marking 6 = Orientation Mark (0402 Only)	Size Code Tape Reel Qty 0201 T Paper 7" 15,000 0402 T Paper 7" 10,000 0603 T Paper 7" 4,000 0805 E Embossed 7" 4,000

Part number written: L-07C10NJV6T

01005 INDUCTANCE RANGE / ELECTRICAL CHARACTERISTICS

Part Number	Inductance @ 100 MHz	Tolerance	Q (Min.) @ 100 MHz	Q (Typ.) @ 100 MHz	Q Typ. @ 900 MHz	Q Typ. @ 1800 MHz	Typical SRF Max	DC Resistance	Rated Current
L-03C0N8SV4T	0.8 nH	+/- 0.3 nH	2	3	10	5	> 13500 MHz	0.20 Ω	200 mA
L-03C1N0SV4T	1.0 nH	+/- 0.3 nH	2	3	10	5	> 13500 MHz	0.20 Ω	200 mA
L-03C1N2SV4T	1.2 nH	+/- 0.3 nH	2	3	10	5	> 13500 MHz	0.22 Ω	200 mA
L-03C1N5SV4T	1.5 nH	+/- 0.3 nH	2	3	10	5	> 13500 MHz	0.24 Ω	200 mA
L-03C1N8SV4T	1.8 nH	+/- 0.3 nH	2	3	10	5	> 13500 MHz	0.30 Ω	200 mA
L-03C2N2SV4T	2.2 nH	+/- 0.3 nH	2	3	10	5	12300	0.44 Ω	200 mA
L-03C2N7SV4T	2.7 nH	+/- 0.3 nH	2	3	10	5	11700	0.50 Ω	200 mA
L-03C3N3SV4T	3.3 nH	± 0.3 nH or ±10%	2	3	10	5	9800	0.55 Ω	200 mA
L-03C3N9SV4T	3.9 nH	± 0.3 nH or ±10%	2	3	10	5	8200	0.60 Ω	200 mA

0201 INDUCTANCE RANGE / ELECTRICAL CHARACTERISTICS

Part Number	Inductance	Tolerance	Q (Min.)	L/Q Freq.	Typical SRF	DC Resistance Max	Rated Current
L-05C0N6CV4T	0.6 nH	± 0.2 nH	4	100 MHz	>13000 MHz	0.12 Ω	300 mA
L-05C0N7CV4T	0.7 nH	± 0.2 nH	4	100 MHz	>13000 MHz	0.12 Ω	300 mA
L-05C0N8CV4T	0.8 nH	± 0.2 nH	4	100 MHz	>13000 MHz	0.12 Ω	300 mA
L-05C0N9CV4T	0.9 nH	± 0.2 nH	4	100 MHz	>13000 MHz	0.12 Ω	300 mA
L-05C1N0*V4T	1.0 nH	± 0.2 or ± 0.3 nH	4	100 MHz	>13000 MHz	0.12 Ω	300 mA
L-05C1N2*V4T	1.2 nH	± 0.2 or ± 0.3 nH	4	100 MHz	>13000 MHz	0.15 Ω	300 mA
L-05C1N3*V4T	1.3 nH	± 0.2 or ± 0.3 nH	4	100 MHz	>13000 MHz	0.15 Ω	300 mA
L-05C1N5*V4T	1.5 nH	± 0.2 or ± 0.3 nH	4	100 MHz	>13000 MHz	0.18 Ω	300 mA
L-05C1N8SV4T	1.8 nH	± 0.3 nH	4	100 MHz	10500 MHz	0.22 Ω	300 mA
L-05C2N2SV4T	2.2 nH	± 0.3 nH	4	100 MHz	9500 MHz	0.26 Ω	300 mA
L-05C2N3SV4T	2.3 nH	± 0.3 nH	4	100 MHz	9200 MHz	0.28 Ω	300 mA
L-05C2N4SV4T	2.4 nH	± 0.3 nH	4	100 MHz	9000 MHz	0.30 Ω	300 mA
L-05C2N5SV4T	2.5 nH	± 0.3 nH	4	100 MHz	9000 MHz	0.30 Ω	300 mA
L-05C2N7SV4T	2.7 nH	± 0.3 nH	4	100 MHz	8500 MHz	0.32 Ω	300 mA
L-05C3N0@V4T	3.0 nH	± 0.3 nH ±10%	4	100 MHz	8000 MHz	0.36 Ω	300 mA
L-05C3N3@V4T	3.3 nH	± 0.3 nH ±10%	4	100 MHz	7500 MHz	0.38 Ω	300 mA
L-05C3N6@V4T	3.6 nH	± 0.3 nH ±10%	4	100 MHz	7000 MHz	0.43 Ω	300 mA
L-05C3N7@V4T	3.7 nH	± 0.3 nH ±10%	4	100 MHz	6900 MHz	0.44 Ω	300 mA
L-05C3N9@V4T	3.9 nH	± 0.3 nH ±10%	4	100 MHz	6800 MHz	0.45 Ω	300 mA
L-05C4N7@V4T	4.7 nH	± 0.3 nH ±10%	4	100 MHz	6000 MHz	0.50 Ω	300 mA
L-05C5N1@V4T	5.1 nH	± 0.3 nH ±10%	5	100 MHz	5700 MHz	0.55 Ω	300 mA
L-05C5N6@V4T	5.6 nH	± 0.3 nH ±10%	5	100 MHz	5500 MHz	0.60 Ω	300 mA
L-05C6N8#V4T	6.8 nH	±5% ±10%	5	100 MHz	4800 MHz	0.70 Ω	250 mA
L-05C8N2#V4T	8.2 nH	±5% ±10%	5	100 MHz	4600 MHz	0.90 Ω	250 mA
L-05C10N#V4T	10.0 nH	±5% ±10%	5	100 MHz	4000 MHz	1.20 Ω	250 mA
L-05C12N#V4T	12.0 nH	±5% ±10%	5	100 MHz	3500 MHz	1.30 Ω	250 mA
L-05C13N#V4T	13.0 nH	±5% ±10%	5	100 MHz	3500 MHz	1.35 Ω	250 mA
L-05C15N#V4T	15.0 nH	±5% ±10%	5	100 MHz	3000 MHz	1.40 Ω	250 mA
L-05C18N#V4T	18.0 nH	±5% ±10%	5	100 MHz	2500 MHz	1.50 Ω	200 mA
L-05C22N#V4T	22.0 nH	±5% ±10%	5	100 MHz	2200 MHz	1.80 Ω	200 mA
L-05C27N#V4T	27.0 nH	±5% ±10%	5	100 MHz	1800 MHz	2.00 Ω	200 mA
L-05C33N#V4T	33.0 nH	±5% ±10%	5	100 MHz	1500 MHz	2.30 Ω	200 mA
L-05C39N#V4T	39.0 nH	±5% ±10%	5	100 MHz	1400 MHz	2.50 Ω	200 mA

0402 INDUCTANCE RANGE / ELECTRICAL CHARACTERISTICS

Part Number	Inductance	Tolerance	Q (Min.)	L/Q Freq.	Typical SRF	DC Resistance Max	Rated Current
L-07C1N0*V6T	1.0 nH	± 0.2 or 0.3 nH	8	100 MHz	>15000 MHz	0.12 Ω	300 mA
L-07C1N2SV6T	1.2 nH	± 0.3 nH	8	100 MHz	>15000 MHz	0.12 Ω	300 mA
L-07C1N5SV6T	1.5 nH	± 0.3 nH	8	100 MHz	>15000 MHz	0.13 Ω	300 mA
L-07C1N6SV6T	1.6 nH	± 0.3 nH	8	100 MHz	14000 MHz	0.14 Ω	300 mA
L-07C1N8SV6T	1.8 nH	± 0.3 nH	8	100 MHz	14000 MHz	0.14 Ω	300 mA
L-07C1N9SV6T	1.9 nH	± 0.3 nH	8	100 MHz	13000 MHz	0.15 Ω	300 mA
L-07C2N0SV6T	2.0 nH	± 0.3 nH	8	100 MHz	12000 MHz	0.16 Ω	300 mA
L-07C2N2SV6T	2.2 nH	± 0.3 nH	8	100 MHz	12000 MHz	0.16 Ω	300 mA

* = Choice of C or S Tolerance, @ = S or K Tolerance, # = J or K Tolerance



0402 CONTINUED

Part Number	Inductance	Tolerance	Q (Min.)	L/Q Freq.	Typical SRF	DC Resistance Max	Rated Current
L-07C2N4SV6T	2.4 nH	± 0.3 nH	8	100 MHz	10000 MHz	0.16 Ω	300 mA
L-07C2N7SV6T	2.7 nH	± 0.3 nH	8	100 MHz	9500 MHz	0.17 Ω	300 mA
L-07C3N0@V6T	3.0 nH	± 0.3 nH	8	100 MHz	9000 MHz	0.18 Ω	300 mA
L-07C3N3@V6T	3.3 nH	± 0.3 nH ±10%	8	100 MHz	8500 MHz	0.19 Ω	300 mA
L-07C3N6@V6T	3.6 nH	± 0.3 nH ±10%	8	100 MHz	7500 MHz	0.21 Ω	300 mA
L-07C3N9@V6T	3.9 nH	± 0.3 nH ±10%	8	100 MHz	7000 MHz	0.22 Ω	300 mA
L-07C4N3@V6T	4.3 nH	± 0.3 nH ±10%	8	100 MHz	6000 MHz	0.24 Ω	300 mA
L-07C4N7@V6T	4.7 nH	± 0.3 nH ±10%	8	100 MHz	6000 MHz	0.24 Ω	300 mA
L-07C5N1@V6T	5.1 nH	± 0.3 nH ±10%	8	100 MHz	5500 MHz	0.26 Ω	300 mA
L-07C5N6@V6T	5.6 nH	± 0.3 nH ±10%	8	100 MHz	5400 MHz	0.27 Ω	300 mA
L-07C6N2#V6T	6.2 nH	±5% ±10%	8	100 MHz	5200 MHz	0.30 Ω	300 mA
L-07C6N8#V6T	6.8 nH	±5% ±10%	8	100 MHz	5000 MHz	0.32 Ω	250 mA
L-07C7N5#V6T	7.5 nH	±5% ±10%	8	100 MHz	4600 MHz	0.40 Ω	250 mA
L-07C8N2#V6T	8.2 nH	±5% ±10%	8	100 MHz	4600 MHz	0.40 Ω	250 mA
L-07C10N#V6T	10.0 nH	±5% ±10%	8	100 MHz	3700 MHz	0.45 Ω	250 mA
L-07C12N#V6T	12.0 nH	±5% ±10%	8	100 MHz	3200 MHz	0.50 Ω	250 mA
L-07C13N#V6T	13.0 nH	±5% ±10%	8	100 MHz	3100 MHz	0.55 Ω	250 mA
L-07C15N#V6T	15.0 nH	±5% ±10%	8	100 MHz	3100 MHz	0.60 Ω	250 mA
L-07C18N#V6T	18.0 nH	±5% ±10%	8	100 MHz	2900 MHz	0.65 Ω	200 mA
L-07C20N#V6T	20.0 nH	±5% ±10%	8	100 MHz	2100 MHz	0.80 Ω	200 mA
L-07C22N#V6T	22.0 nH	±5% ±10%	8	100 MHz	2100 MHz	0.80 Ω	200 mA
L-07C23N#V6T	23.0 nH	±5% ±10%	8	100 MHz	2100 MHz	0.85 Ω	200 mA
L-07C27N#V6T	27.0 nH	±5% ±10%	8	100 MHz	1900 MHz	0.90 Ω	200 mA
L-07C33N#V6T	33.0 nH	±5% ±10%	8	100 MHz	1600 MHz	1.00 Ω	200 mA
L-07C39N#V6T	39.0 nH	±5% ±10%	8	100 MHz	1400 MHz	1.20 Ω	150 mA
L-07C43N#V6T	43.0 nH	±5% ±10%	8	100 MHz	1300 MHz	1.30 Ω	150 mA
L-07C47N#V6T	47.0 nH	±5% ±10%	8	100 MHz	1200 MHz	1.30 Ω	150 mA
L-07C56N#V6T	56.0 nH	±5% ±10%	8	100 MHz	1100 MHz	2.00 Ω	150 mA
L-07C68N#V6T	68.0 nH	±5% ±10%	8	100 MHz	1000 MHz	2.20 Ω	100 mA
L-07C82N#V6T	82.0 nH	±5% ±10%	8	100 MHz	900 MHz	2.50 Ω	100 mA
L-07CR10#V6T	100 nH	±5% ±10%	8	100 MHz	850 MHz	2.50 Ω	100 mA
L-07CR12#V6T	120 nH	±5% ±10%	8	50 MHz	750 MHz	2.50 Ω	100 mA

0603 INDUCTANCE RANGE / ELECTRICAL CHARACTERISTICS

Part Number	Inductance	Tolerance	Q (Min.)	L/Q Freq.	Typical SRF	DC Resistance Max	Rated Current
L-14C1N0SV4T	1.0 nH	± 0.3 nH	8	100 MHz	>17000 MHz	0.10 Ω	300 mA
L-14C1N2SV4T	1.2 nH	± 0.3 nH	8	100 MHz	>17000 MHz	0.10 Ω	300 mA
L-14C1N5SV4T	1.5 nH	± 0.3 nH	8	100 MHz	>17000 MHz	0.10 Ω	300 mA
L-14C1N8SV4T	1.8 nH	± 0.3 nH	8	100 MHz	13000 MHz	0.10 Ω	300 mA
L-14C2N2SV4T	2.2 nH	± 0.3 nH	8	100 MHz	12000 MHz	0.15 Ω	300 mA
L-14C2N7SV4T	2.7 nH	± 0.3 nH	8	100 MHz	8600 MHz	0.15 Ω	300 mA
L-14C3N3@V4T	3.3 nH	± 0.3 nH ±10%	8	100 MHz	6500 MHz	0.20 Ω	300 mA
L-14C3N9@V4T	3.9 nH	± 0.3 nH ±10%	8	100 MHz	6300 MHz	0.20 Ω	300 mA
L-14C4N7@V4T	4.7 nH	± 0.3 nH ±10%	8	100 MHz	5400 MHz	0.20 Ω	300 mA
L-14C5N6@V4T	5.6 nH	± 0.3 nH ±10%	8	100 MHz	4600 MHz	0.25 Ω	300 mA
L-14C6N8#V4T	6.8 nH	±5% ±10%	8	100 MHz	4500 MHz	0.30 Ω	300 mA
L-14C8N2#V4T	8.2 nH	±5% ±10%	8	100 MHz	3800 MHz	0.33 Ω	300 mA
L-14C10N#V4T	10.0 nH	±5% ±10%	8	100 MHz	3700 MHz	0.35 Ω	300 mA
L-14C12N#V4T	12.0 nH	±5% ±10%	8	100 MHz	3200 MHz	0.40 Ω	300 mA
L-14C15N#V4T	15.0 nH	±5% ±10%	8	100 MHz	2900 MHz	0.45 Ω	300 mA
L-14C18N#V4T	18.0 nH	±5% ±10%	10	100 MHz	2100 MHz	0.50 Ω	300 mA
L-14C22N#V4T	22.0 nH	±5% ±10%	10	100 MHz	2100 MHz	0.55 Ω	300 mA
L-14C27N#V4T	27.0 nH	±5% ±10%	10	100 MHz	2000 MHz	0.60 Ω	300 mA
L-14C33N#V4T	33.0 nH	±5% ±10%	10	100 MHz	1600 MHz	0.65 Ω	300 mA
L-14C39N#V4T	39.0 nH	±5% ±10%	10	100 MHz	1500 MHz	0.70 Ω	300 mA
L-14C47N#V4T	47.0 nH	±5% ±10%	12	100 MHz	1200 MHz	0.90 Ω	300 mA

@ = Choice of S or K Tolerance, # = J or K Tolerance



0603 CONTINUED







Part Number	Inductance	Tolerance	Q (Min.)	L/Q Freq.	Typical SRF	DC Resistance Max	Rated Current
L-14C56N#V4T	56.0 nH	±5% ±10%	12	100 MHz	1100 MHz	1.00 Ω	300 mA
L-14C68N#V4T	68.0 nH	±5% ±10%	12	100 MHz	1000 MHz	1.10 Ω	300 mA
L-14C82N#V4T	82.0 nH	±5% ±10%	12	100 MHz	850 MHz	1.20 Ω	300 mA
L-14CR10#V4T	100 nH	±5% ±10%	12	100 MHz	750 MHz	1.20 Ω	300 mA
L-14CR12#V4T	120 nH	±5% ±10%	8	50 MHz	700 MHz	1.30 Ω	300 mA
L-14CR15#V4T	150 nH	±5% ±10%	8	50 MHz	650 MHz	1.40 Ω	300 mA
L-14CR18#V4T	180 nH	±5% ±10%	8	50 MHz	550 MHz	1.50 Ω	300 mA
L-14CR22#V4T	220 nH	±5% ±10%	8	50 MHz	450 MHz	1.70 Ω	300 mA

0805 INDUCTANCE RANGE / ELECTRICAL CHARACTERISTICS

Part Number	Inductance	Tolerance	Q (Min.)	L/Q Freq.	Typical SRF	DC Resistance Max	Rated Current
L-15C1N5SV4E	1.5 nH	± 0.3 nH	10	100 MHz	>6000 MHz	0.10 Ω	300 mA
L-15C1N8SV4E	1.8 nH	± 0.3 nH	10	100 MHz	>6000 MHz	0.10 Ω	300 mA
L-15C2N2SV4E	2.2 nH	± 0.3 nH	10	100 MHz	>6000 MHz	0.10 Ω	300 mA
L-15C2N7SV4E	2.7 nH	± 0.3 nH	12	100 MHz	>6000 MHz	0.12 Ω	300 mA
L-15C3N3@V4E	3.3 nH	± 0.3 nH ±10%	12	100 MHz	>6000 MHz	0.13 Ω	300 mA
L-15C3N9@V4E	3.9 nH	± 0.3 nH ±10%	12	100 MHz	5600 MHz	0.15 Ω	300 mA
L-15C4N7@V4E	4.7 nH	± 0.3 nH ±10%	12	100 MHz	5500 MHz	0.20 Ω	300 mA
L-15C5N6@V4E	5.6 nH	± 0.3 nH ±10%	12	100 MHz	4700 MHz	0.23 Ω	300 mA
L-15C6N8#V4E	6.8 nH	±5% ±10%	15	100 MHz	3900 MHz	0.25 Ω	300 mA
L-15C8N2#V4E	8.2 nH	±5% ±10%	15	100 MHz	3200 MHz	0.28 Ω	300 mA
L-15C10N#V4E	10.0 nH	±5% ±10%	15	100 MHz	3100 MHz	0.30 Ω	300 mA
L-15C12N#V4E	12.0 nH	±5% ±10%	15	100 MHz	2800 MHz	0.35 Ω	300 mA
L-15C15N#V4E	15.0 nH	±5% ±10%	15	100 MHz	2400 MHz	0.40 Ω	300 mA
L-15C18N#V4E	18.0 nH	±5% ±10%	15	100 MHz	2100 MHz	0.45 Ω	300 mA
L-15C22N#V4E	22.0 nH	±5% ±10%	15	100 MHz	2000 MHz	0.50 Ω	300 mA
L-15C27N#V4E	27.0 nH	±5% ±10%	15	100 MHz	1800 MHz	0.55 Ω	300 mA
L-15C33N#V4E	33.0 nH	±5% ±10%	15	100 MHz	1700 MHz	0.60 Ω	300 mA
L-15C39N#V4E	39.0 nH	±5% ±10%	18	100 MHz	1400 MHz	0.65 Ω	300 mA
L-15C47N#V4E	47.0 nH	±5% ±10%	18	100 MHz	1200 MHz	0.70 Ω	300 mA
L-15C56N#V4E	56.0 nH	±5% ±10%	18	100 MHz	1000 MHz	0.75 Ω	300 mA
L-15C68N#V4E	68.0 nH	±5% ±10%	18	100 MHz	900 MHz	0.80 Ω	300 mA
L-15C82N#V4E	82.0 nH	±5% ±10%	18	100 MHz	900 MHz	0.85 Ω	300 mA
L-15CR10#V4E	100 nH	±5% ±10%	18	100 MHz	700 MHz	0.90 Ω	300 mA
L-15CR12#V4E	120 nH	±5% ±10%	13	50 MHz	600 MHz	0.95 Ω	300 mA
L-15CR15#V4E	150 nH	±5% ±10%	13	50 MHz	500 MHz	1.00 Ω	300 mA
L-15CR18#V4E	180 nH	±5% ±10%	13	50 MHz	430 MHz	1.10 Ω	300 mA
L-15CR22#V4E	220 nH	±5% ±10%	12	50 MHz	400 MHz	1.20 Ω	300 mA
L-15CR27#V4E	270 nH	±5% ±10%	12	50 MHz	340 MHz	1.30 Ω	300 mA
L-15CR33#V4E	330 nH	±5% ±10%	12	50 MHz	320 MHz	1.50 Ω	300 mA
L-15CR39#V4E	390 nH	±5% ±10%	10	50 MHz	270 MHz	1.60 Ω	300 mA
L-15CR47#V4E	470 nH	±5% ±10%	10	50 MHz	250 MHz	1.80 Ω	300 mA
L-15CR56#V4E	560 nH	±5% ±10%	10	50 MHz	230 MHz	2.50 Ω	300 mA
L-15CR68#V4E	680 nH	±5% ±10%	10	50 MHz	180 MHz	3.00 Ω	300 mA

"@ = Choice of S or K Tolerance, # = J or K Tolerance"

RF CHARACTERISTICS CHARACTERISTICS (TYPICAL)

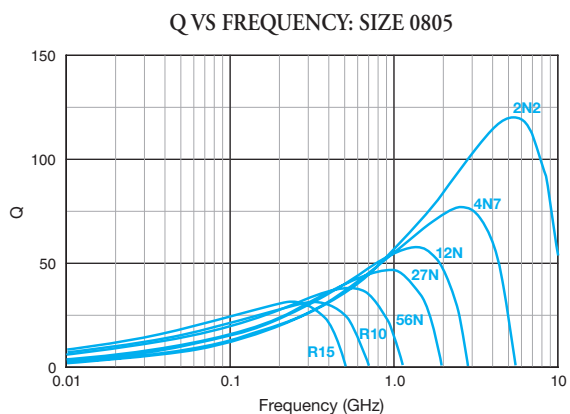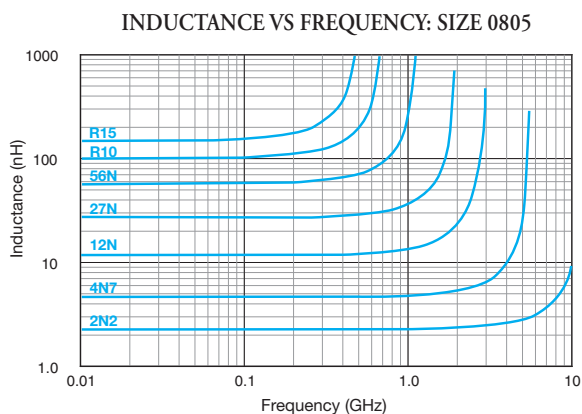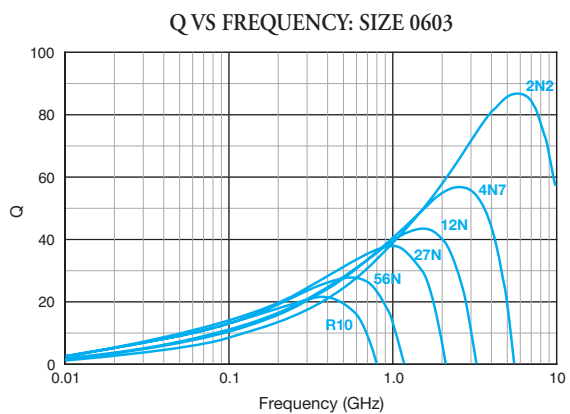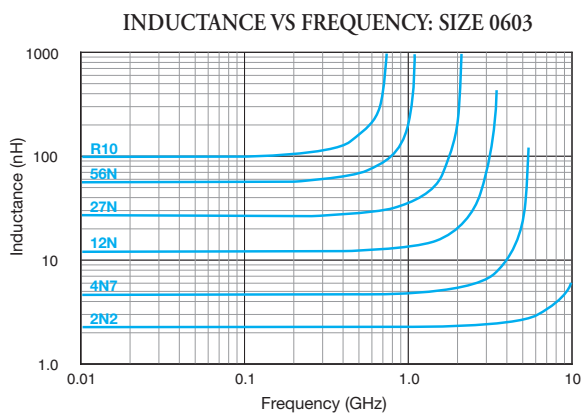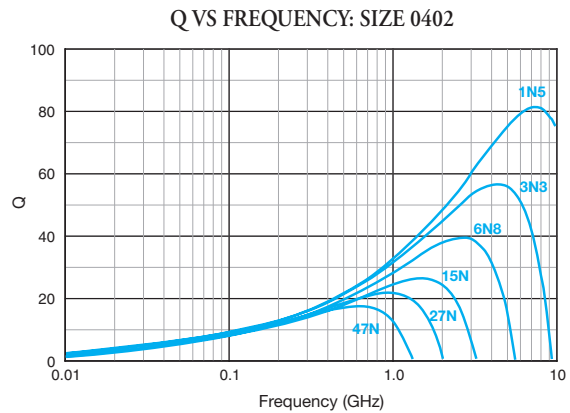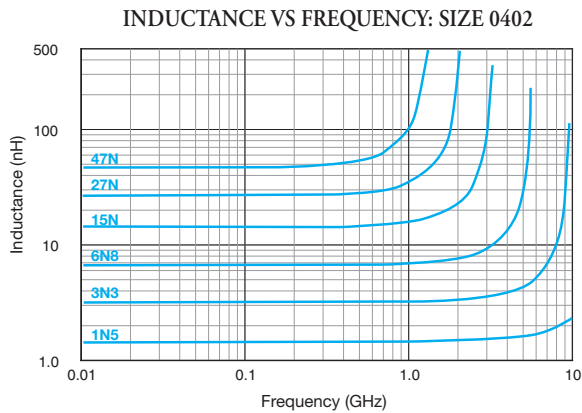

MECHANICAL & ENVIRONMENTAL CHARACTERISTICS

	SPECIFICATION	TEST PARAMETERS
SOLDERABILITY:	Solder coverage $\geq 75\%$ of electrodes $L=\pm 10\%$ $Q=\pm 20\%$	Preheat $120\pm 20^\circ\text{C}$ for 1 min. Dip $230\pm 10^\circ\text{C}$ for 3 ± 1 sec.
RESISTANCE TO SOLDERING:	No apparent damage Solder coverage $\geq 75\%$ $L=\pm 10\%$ $Q=\pm 20\%$	Preheat $120\pm 20^\circ\text{C}$ for 1 min. Dip $260\pm 10^\circ\text{C}$ for 10 ± 1 sec.
THERMAL SHOCK:	No apparent damage $L=\pm 10\%$ $Q=\pm 20\%$	100 cycles: 30 ± 3 minutes @ $+100^\circ\text{C}$ then 30 ± 3 min. @ -40°C
LIFE TEST:	No apparent damage $L=\pm 10\%$ $Q=\pm 20\%$	1000 ± 48 Hours @ $+85\pm 2^\circ\text{C}$, rated current (1-2 hour recovery)
HUMIDITY RESISTANCE:	Inductance change: 2% or .5pF Max	1000 ± 48 Hours @ $+40\pm 2^\circ\text{C}$, 90-95% relative humidity, rated current (1-2 hour recovery)
TERMINAL ADHESION:	Termination should not pull off. Ceramic should remain undamaged.	Lateral pull force: 0201 ≥ 1.0 Lbs 0402 ≥ 1.6 Lbs For 0603 ≥ 2.2 Lbs For 0805 ≥ 4.4 Lbs
PCB DEFLECTION:	No mechanical damage.	Glass Epoxy PCB: 1 mm deflection