



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




ENERGIZER L522MJ

9V



Industry Standard Dimensions

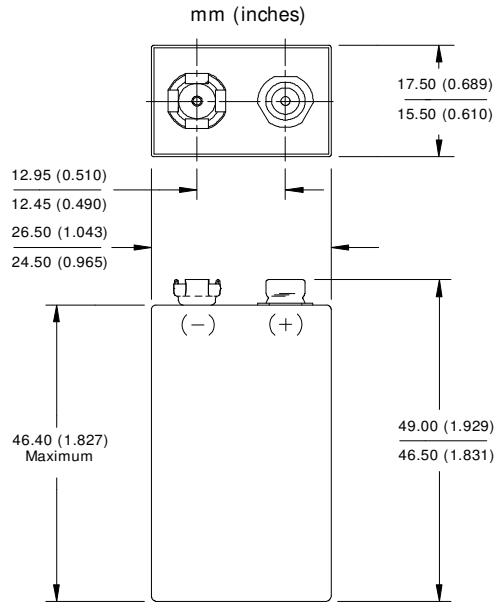



This Battery has Underwriters Laboratories component Recognition

Specifications



Classification:	Lithium 9V
Chemical System:	Lithium-Manganese Dioxide (Li/MnO ₂)
Designation:	ANSI-1604LC
Nominal Voltage:	9.0 volts
Operating Temp:	-40°C to 60°C (-40°F to 140°F)
Storage Temp:	-40°C to 60°C (-40°F to 140°F)
Max Discharge :	120 mA continuous *
Typical Weight:	36.4 grams (1.3 oz.)
Typical Volume:	21.4 cubic centimeters (1.3 cubic inch)
Jacket:	Metal
Terminal:	Miniature Snap
Typical Li Content:	1.35 grams (0.048 oz.)
UL Listed:	MH12454
Applications:	This battery best suited for long and short term applications.
Shipping:	For complete details, please reference: Global (except US): Special Provision A45 of the International Air Transport Association Dangerous Goods Regulations United States: 49 CFR 173.185

* **Discharging above 120 milliamps (mA) may activate the built-in safety mechanism. This can permanently affect battery performance.**

Typical Discharge Performance (21°C)

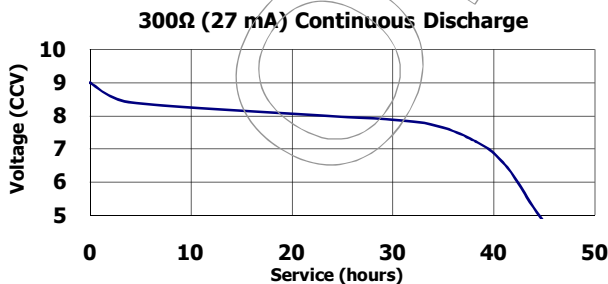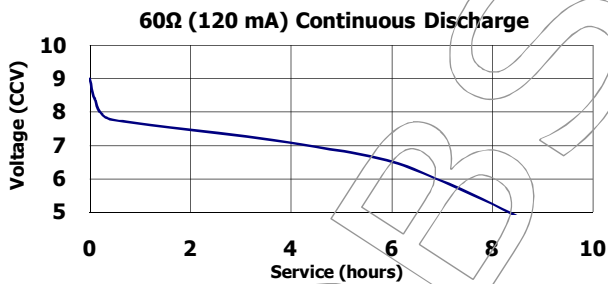

Milliamp-Hours Performance (21°C)

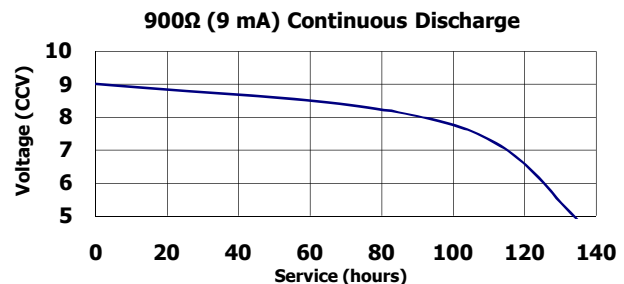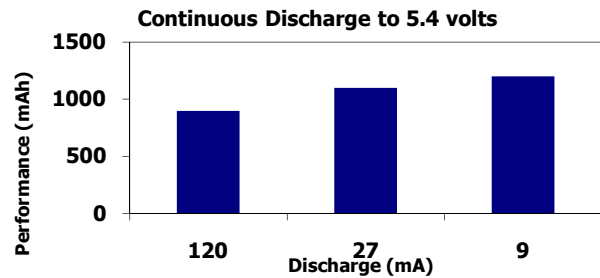

Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.
©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.